


AT Series™ SR01/02


Extended Strain Relief Series

Available in 2, 3, 4, 6, 8, 12 and 18 position

Amphenol Sine Systems' **AT Series™ SR01 and SR02** connectors are a high-performance, thermoplastic, cost-effective solution with specifically-designed, extended strain relief wire cavities that protect each individual wire seal, eliminating stress on the rear seal while maintaining an IP68/69K rated (mated) performance regardless of wire bundle direction or improper installation. **The AT Series™ SR01 and SR02 meet all the performance criteria and specifications of the AT Series™**, is available in a wide variety of custom colors, and accepts all **A Series™** Size 16 contacts.



PROTECTS each wire cavity to maximize sealing integrity.

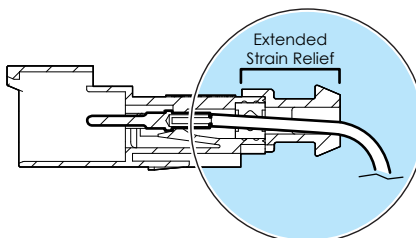

MAINTAINS proper wire routing 100% of the time.

AT AT Series™ SR01 Standard Diameter Rear Seals (Red) - 2.24mm (.088") - 3.68mm (.145")

AT AT Series™ SR02 Reduced Diameter Rear Seals (Green) - 1.35mm (.053") - 3.05mm (.120")


Applications: Marine, Heavy Equipment, Agricultural, Automotive, Alternative Energy, as well as other demanding interconnect applications

Key Features

- Heat-shrink capable shroud for applications requiring heat shrink (The use of heat shrink is NOT required to meet existing IP standards)
- Enhanced Sealing Plugs for simplified insertion/removal, improved retention capabilities and include a positive 'stop' for full insertion verification
- Also available in **PanelMate™ AT -PM15** (SR01 Standard Rear Seal) or **-PM16** (SR02 Reduced Diameter Rear Seal)
- Thermoplastic housing with excellent UV resistance
- Wedgelocks ensure proper contact alignment & retention
- Integrated latch for mating ensures a secure connection
- Superior front and rear environmental sealing
- Compatible with existing standard products industry-wide



Standard vs SR01/02
Extended Strain Relief



Heat-Shrink Capable
Strain Relief



Enhanced
Sealing Plugs

IP Ratings

IP67 rated (Dust tight; 1M of Water for 30 Minutes, in mated condition)

IP68 rated (Dust tight; 1M of Water for 24 Hours, in mated condition)

IP69K rated (Dust tight; High-Pressure Waterproof, 4 Points (0°, 30°, 60°, 90°), in mated condition)



A Series™ Family



Standard products. Custom solutions
Customer Service +1 800 394 7732


AT Series™ SR01/SR02 - Specifications (Reference Individual Datasheets)

IP Rating (in mated condition)	IP68 and IP69K
Max. Current (Amperage)	Up to 13A
Max. Voltage Rating	250V
Operating Temperature	-55°C to +125°C
Coupling System	Integrated Latch
Housing Body	Thermoplastic UL94-VO
Contact Types	Stamped & Formed, Machined
Contact Material	Copper Alloy (Nickel and Gold Plating optional)
Wire Range	14-20AWG (See datasheets)
Sealing Material	Silicone Rubber
Min. Mating Cycles	>100
Fluid Resistance	Gas, oil, mineral oil, acid bath, basic bath
Insulation Resistance	1000 megohms min. of 25°C
Dielectric Withstanding Voltage	Less than 2 mA current leakage @ 1500V AC


Shock	No latch disengagement or discontinuity shall be the result when subjected to 50 g's in each of three axis (X, Y & Z)
Vibration	Continued continuity without degradation to mechanical or physical attributes following vibration. (Max acceleration 20 g's at Sine sweep of 10-2000Hz)
Connector Terminal Retention	When subjected to a direct pull, contacts achieve a minimum pull-out force of 25 lbs.
Connector Retention	A mated connector subjected to a pulling force by the exiting wire bundle at 25 lbs. times the number of contacts to a maximum of 100 lbs. applying load for 30 seconds
Thermal Shock	Subjected to 10 cycles at -55°C to +125°C with no cracking, chipping or other damage detrimental to the normal operation of the connector
RoHS Compliant	ALL materials meet the requirements of the European Directive. (See website for documentation)
Approvals	UL ECBT2, UL ECBT8, VDE, SEV, UL, CSA

Grey	Black	Brown	Blue	White	Yellow	Green	Red	Orange
------	-------	-------	------	-------	--------	-------	-----	--------


Part Numbering Sequence (2, 3, 4 and 6 position)

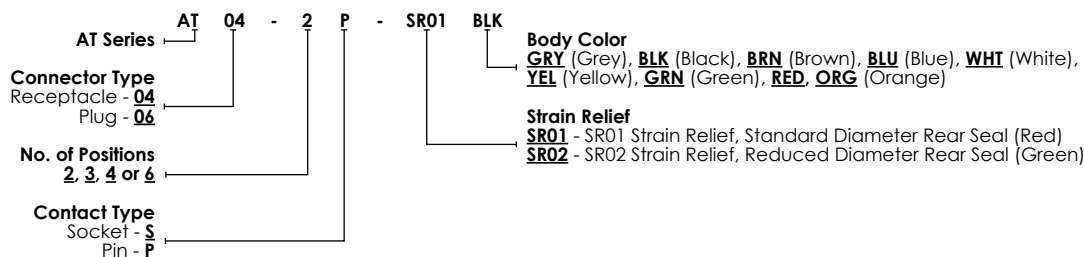

Part Numbering Sequence (08 and 12 position)

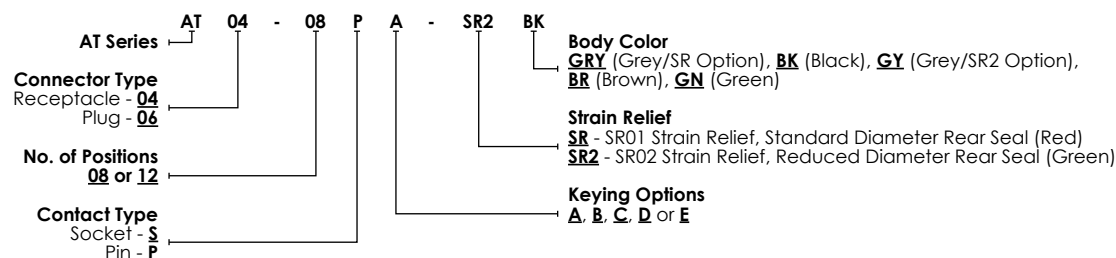

Part Numbering Sequence (18 position)

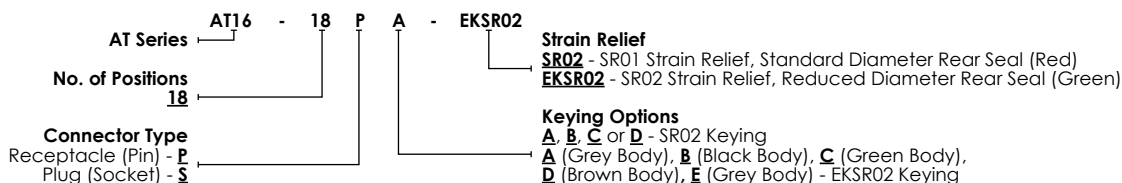

AT Series™ SR01/02 - Plugs and Wedgelocks

Note: Refer to individual datasheets on www.amphenol-sine.com for full specs, faceviews, keying location and product dimensions.

Image	Part Number	Description	Size	Amp
	AT06-2S-SR01GRY	2 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AW2S. Keyed Options Available.)	16	13A
	AT06-2S-SR02GRY	2 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Grey Body (Requires Wedgelock AW2S. Keyed Options Available.)	16	13A
	AT06-2S-SR01BLK	2 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AW2S. Keyed Options Available.)	16	13A
	AT06-2S-SR02BLK	2 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Black Body (Requires Wedgelock AW2S. Keyed Options Available.)	16	13A
	AT06-2S-SR01BLU	2 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AW2S. Keyed Options Available.)	16	13A
	AT06-2S-SR02BLU	2 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Blue Body (Requires Wedgelock AW2S. Keyed Options Available.)	16	13A
	AT06-2S-SR01BRN	2 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AW2S. Keyed Options Available.)	16	13A
	AT06-2S-SR02BRN	2 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Brown Body (Requires Wedgelock AW2S. Keyed Options Available.)	16	13A
	AT06-2S-SR01WHT	2 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AW2S. Keyed Options Available.)	16	13A
	AT06-2S-SR02WHT	2 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, White Body (Requires Wedgelock AW2S. Keyed Options Available.)	16	13A
	AT06-2S-SR01YEL	2 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AW2S. Keyed Options Available.)	16	13A
	AT06-2S-SR02YEL	2 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Yellow Body (Requires Wedgelock AW2S. Keyed Options Available.)	16	13A
	AT06-2S-SR01GRN	2 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AW2S. Keyed Options Available.)	16	13A
	AT06-2S-SR02GRN	2 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Green Body (Requires Wedgelock AW2S. Keyed Options Available.)	16	13A
	AT06-2S-SR01RED	2 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AW2S. Keyed Options Available.)	16	13A
	AT06-2S-SR02RED	2 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Red Body (Requires Wedgelock AW2S. Keyed Options Available.)	16	13A
	AT06-2S-SR01ORG	2 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AW2S. Keyed Options Available.)	16	13A
	AT06-2S-SR02ORG	2 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Orange Body (Requires Wedgelock AW2S. Keyed Options Available.)	16	13A
	AW2S	2 Position, Plug Wedgelock, Green	-	-
	AW2S-A	2 Position, Plug Wedgelock, Keyed A, Grey	-	-
	AW2S-B	2 Position, Plug Wedgelock, Keyed A, Black	-	-
	AW2S-C	2 Position, Plug Wedgelock, Keyed A, Green	-	-
	AW2S-D	2 Position, Plug Wedgelock, Keyed A, Brown	-	-

Image	Part Number	Description	Size	Amp
	AT06-3S-SR01GRY	3 Position, Plug, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Gray Body (Requires Wedgelock AW3S.)	16	13A
	AT06-3S-SR02GRY	3 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Grey Body (Requires Wedgelock AW3S.)	16	13A
	AT06-3S-SR01BLK	3 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AW3S.)	16	13A
	AT06-3S-SR02BLK	3 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Black Body (Requires Wedgelock AW3S.)	16	13A
	AT06-3S-SR01BLU	3 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AW3S.)	16	13A
	AT06-3S-SR02BLU	3 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Blue Body (Requires Wedgelock AW3S.)	16	13A
	AT06-3S-SR01BRN	3 Position, Plug, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AW3S.)	16	13A
	AT06-3S-SR02BRN	3 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Brown Body (Requires Wedgelock AW3S.)	16	13A
	AT06-3S-SR01WHT	3 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AW3S.)	16	13A
	AT06-3S-SR02WHT	3 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, White Body (Requires Wedgelock AW3S.)	16	13A
	AT06-3S-SR01YEL	3 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AW3S.)	16	13A
	AT06-3S-SR02YEL	3 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Yellow Body (Requires Wedgelock AW3S.)	16	13A
	AT06-3S-SR01GRN	3 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AW3S.)	16	13A
	AT06-3S-SR02GRN	3 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Green Body (Requires Wedgelock AW3S.)	16	13A
	AT06-3S-SR01RED	3 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AW3S.)	16	13A
	AT06-3S-SR02RED	3 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Red Body (Requires Wedgelock AW3S.)	16	13A
	AT06-3S-SR01ORG	3 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AW3S.)	16	13A
	AT06-3S-SR02ORG	3 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Orange Body (Requires Wedgelock AW3S.)	16	13A
	AW3S	3 Position, Plug Wedgelock, Green	-	-
	AW3S-1939	3 Position, J1939 Plug Wedgelock, Blue	-	-
	AT06-4S-SR01GRY	4 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AW4S. Keyed Options Available.)	16	13A
	AT06-4S-SR02GRY	4 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Grey Body (Requires Wedgelock AW4S. Keyed Options Available.)	16	13A
	AT06-4S-SR01BLK	4 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AW4S. Keyed Options Available.)	16	13A
	AT06-4S-SR02BLK	4 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Black Body (Requires Wedgelock AW4S. Keyed Options Available.)	16	13A
	AT06-4S-SR01BLU	4 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AW4S. Keyed Options Available.)	16	13A
	AT06-4S-SR02BLU	4 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Blue Body (Requires Wedgelock AW4S. Keyed Options Available.)	16	13A

Image	Part Number	Description	Size	Amp
	AT06-4S-SR01BRN	4 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AW4S. Keyed Options Available.)	16	13A
	AT06-4S-SR02BRN	4 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Brown Body (Requires Wedgelock AW4S. Keyed Options Available.)	16	13A
	AT06-4S-SR01WHT	4 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AW4S. Keyed Options Available.)	16	13A
	AT06-4S-SR02WHT	4 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, White Body (Requires Wedgelock AW4S. Keyed Options Available.)	16	13A
	AT06-4S-SR01YEL	4 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AW4S. Keyed Options Available.)	16	13A
	AT06-4S-SR02YEL	4 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), vStrain Relief, Yellow Body (Requires Wedgelock AW4S. Keyed Options Available.)	16	13A
	AT06-4S-SR01GRN	4 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AW4S. Keyed Options Available.)	16	13A
	AT06-4S-SR02GRN	4 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Green Body (Requires Wedgelock AW4S. Keyed Options Available.)	16	13A
	AT06-4S-SR01RED	4 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AW4S. Keyed Options Available.)	16	13A
	AT06-4S-SR02RED	4 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Red Body (Requires Wedgelock AW4S. Keyed Options Available.)	16	13A
	AT06-4S-SR01ORG	4 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AW4S. Keyed Options Available.)	16	13A
	AT06-4S-SR02ORG	4 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Orange Body (Requires Wedgelock AW4S. Keyed Options Available.)	16	13A
	AW4S	4 Position, Plug Wedgelock, Green	-	-
	AW4S-A	4 Position, Plug Wedgelock, Keyed A, Grey	-	-
	AW4S-B	4 Position, Plug Wedgelock, Keyed A, Black	-	-
	AW4S-C	4 Position, Plug Wedgelock, Keyed A, Green	-	-
	AW4S-D	4 Position, Plug Wedgelock, Keyed A, Brown	-	-
	AT06-6S-SR01GRY	6 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AW6S.)	16	13A
	AT06-6S-SR02GRY	6 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Gray Body (Requires Wedgelock AW6S.)	16	13A
	AT06-6S-SR01BLK	6 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AW6S.)	16	13A
	AT06-6S-SR02BLK	6 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Black Body (Requires Wedgelock AW6S.)	16	13A
	AT06-6S-SR01BLU	6 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AW6S.)	16	13A
	AT06-6S-SR02BLU	6 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Blue Body (Requires Wedgelock AW6S.)	16	13A
	AT06-6S-SR01BRN	6 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AW6S.)	16	13A
	AT06-6S-SR02BRN	6 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Brown Body (Requires Wedgelock AW6S.)	16	13A

Image	Part Number	Description	Size	Amp
	AT06-6S-SR01WHT	6 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AW6S.)	16	13A
	AT06-6S-SR02WHT	6 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, White Body (Requires Wedgelock AW6S.)	16	13A
	AT06-6S-SR01YEL	6 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AW6S.)	16	13A
	AT06-6S-SR02YEL	6 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Yellow Body (Requires Wedgelock AW6S.)	16	13A
	AT06-6S-SR01GRN	6 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AW6S.)	16	13A
	AT06-6S-SR02GRN	6 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Green Body (Requires Wedgelock AW6S.)	16	13A
	AT06-6S-SR01RED	6 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AW6S.)	16	13A
	AT06-6S-SR02RED	6 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Red Body (Requires Wedgelock AW6S.)	16	13A
	AT06-6S-SR01ORG	6 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AW6S.)	16	13A
	AT06-6S-SR02ORG	6 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Orange Body (Requires Wedgelock AW6S.)	16	13A
	AW6S	6 Position, Plug Wedgelock, Green	-	-

	AT06-08SA-SRGRY	8 Position, Plug, Socket, Standard Diameter Rear Seal (Red), Keyed A, SR01 Strain Relief, Grey Body (Requires Wedgelock AW8S.)	16	13A
	AT06-08SA-SR2GY	8 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), Keyed A, SR02 Strain Relief, Grey Body (Requires Wedgelock AW8S.)	16	13A
	AT06-08SA-SRBK	8 Position, Plug, Socket, Standard Diameter Rear Seal (Red), Keyed A, SR01 Strain Relief, Black Body (Requires Wedgelock AW8S.)	16	13A
	AT06-08SA-SR2BK	8 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), Keyed A, SR02 Strain Relief, Grey Body (Requires Wedgelock AW8S.)	16	13A
	AT06-08SB-SRBK	8 Position, Plug, Socket, Standard Diameter Rear Seal (Red), Keyed B, SR01 Strain Relief, Black Body (Requires Wedgelock AW8S.)	16	13A
	AT06-08SB-SR2BK	8 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), Keyed B, SR02 Strain Relief, Black Body (Requires Wedgelock AW8S.)	16	13A
	AT06-08SC-SRGN	8 Position, Plug, Socket, Standard Diameter Rear Seal (Red), Keyed C, SR01 Strain Relief, Green Body (Requires Wedgelock AW8S.)	16	13A
	AT06-08SC-SR2GN	8 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), Keyed C, SR02 Strain Relief, Green Body (Requires Wedgelock AW8S.)	16	13A
	AT06-08SD-SRBR	8 Position, Plug, Socket, Standard Diameter Rear Seal (Red), Keyed D, SR01 Strain Relief, Brown Body (Requires Wedgelock AW8S.)	16	13A
	AT06-08SD-SR2BR	8 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), Keyed D, SR02 Strain Relief, Brown Body (Requires Wedgelock AW8S.)	16	13A
	AW8S	8 Position, Plug Wedgelock, Green	-	-

	AT06-12SA-SRGRY	12 Position, Plug, Socket, Standard Diameter Rear Seal (Red), Keyed A, SR01 Strain Relief, Grey Body (Requires Wedgelock AW12S.)	16	13A
--	-----------------	--	----	-----

Image	Part Number	Description	Size	Amp
	AT06-12SA-SR2GY	12 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), Keyed A, SR02 Strain Relief, Grey Body (Requires Wedgelock AW12S.)	16	13A
	AT06-12SA-SRBK	12 Position, Plug, Socket, Standard Diameter Rear Seal (Red), Keyed A, SR01 Strain Relief, Black Body (Requires Wedgelock AW12S.)	16	13A
	AT06-12SA-SR2BK	12 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), Keyed A, SR02 Strain Relief, Black Body (Requires Wedgelock AW12S.)	16	13A
	AT06-12SB-SRBK	12 Position, Plug, Socket, Standard Diameter Rear Seal (Red), Keyed B, SR01 Strain Relief, Black Body (Requires Wedgelock AW12S.)	16	13A
	AT06-12SB-SR2BK	12 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), Keyed B, SR02 Strain Relief, Black Body (Requires Wedgelock AW12S.)	16	13A
	AT06-12SC-SRGN	12 Position, Plug, Socket, Standard Diameter Rear Seal (Red), Keyed C, SR01 Strain Relief, Green Body (Requires Wedgelock AW12S.)	16	13A
	AT06-12SC-SR2GN	12 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), Keyed C, SR02 Strain Relief, Green Body (Requires Wedgelock AW12S.)	16	13A
	AT06-12SD-SRBR	12 Position, Plug, Socket, Standard Diameter Rear Seal (Red), Keyed D, SR01 Strain Relief, Brown Body (Requires Wedgelock AW12S.)	16	13A
	AT06-12SD-SR2BR	12 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), Keyed D, SR02 Strain Relief, Brown Body (Requires Wedgelock AW12S.)	16	13A
	AW12S	12 Position, Plug Wedgelock, Green	-	-

	AT16-18SA-SR02	18 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), Keyed A, SR02 Strain Relief, Black Body (No Wedgelock Required.)	16	13A
	AT16-18SA-EKSR02	18 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), Keyed A, SR02 Strain Relief, Grey Body (No Wedgelock Required.)	16	13A
	AT16-18SB-SR02	18 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), Keyed B, SR02 Strain Relief, Black Body (No Wedgelock Required.)	16	13A
	AT16-18SC-SR02	18 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), Keyed C, SR02 Strain Relief, Black Body (No Wedgelock Required.)	16	13A
	AT16-18SC-EKSR02	18 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), Keyed C, SR02 Strain Relief, Green Body (No Wedgelock Required.)	16	13A
	AT16-18SD-SR02	18 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), Keyed D, SR02 Strain Relief, Black Body (No Wedgelock Required.)	16	13A
	AT16-18SD-EKSR02	18 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), Keyed D, SR02 Strain Relief, Brown Body (No Wedgelock Required.)	16	13A
	AT16-18SE-SR02	18 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), Keyed E, SR02 Strain Relief, Black Body (No Wedgelock Required.)	16	13A
	AT16-18SE-EKSR02	18 Position, Plug, Socket, Reduced Diameter Rear Seal (Green), Keyed E, SR02 Strain Relief, Grey Body (No Wedgelock Required.)	16	13A

AT Series™ SR01/02 - Receptacles and Wedgelocks

Note: Refer to individual datasheets on www.amphenol-sine.com for full specs, faceviews, keying location and product dimensions.

	AT04-2P-SR01GRY	2 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Gray Body (Requires Wedgelock AW2P.)	16	13A
	AT04-2P-SR02GRY	2 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Grey Body (Requires Wedgelock AW2P. Keyed Options Available.)	16	13A
	AT04-2P-SR01BLK	2 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AW2P.)	16	13A
	AT04-2P-SR02BLK	2 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Black Body (Requires Wedgelock AW2P. Keyed Options Available.)	16	13A
	AT04-2P-SR01BLU	2 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AW2P.)	16	13A
	AT04-2P-SR02BLU	2 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Blue Body (Requires Wedgelock AW2P. Keyed Options Available.)	16	13A

Image	Part Number	Description	Size	Amp
	AT04-2P-SR01BRN	2 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AW2P.)	16	13A
	AT04-2P-SR02BRN	2 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Brown Body (Requires Wedgelock AW2P. Keyed Options Available.)	16	13A
	AT04-2P-SR01WHT	2 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AW2P.)	16	13A
	AT04-2P-SR02WHT	2 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, White Body (Requires Wedgelock AW2P. Keyed Options Available.)	16	13A
	AT04-2P-SR01YEL	2 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AW2P.)	16	13A
	AT04-2P-SR02YEL	2 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Yellow Body (Requires Wedgelock AW2P. Keyed Options Available.)	16	13A
	AT04-2P-SR01GRN	2 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AW2P.)	16	13A
	AT04-2P-SR02GRN	2 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Green Body (Requires Wedgelock AW2P. Keyed Options Available.)	16	13A
	AT04-2P-SR01RED	2 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AW2P. Keyed Options Available.)	16	13A
	AT04-2P-SR02RED	2 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Red Body (Requires Wedgelock AW2P. Keyed Options Available.)	16	13A
	AT04-2P-SR01ORG	2 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AW2P.)	16	13A
	AT04-2P-SR02ORG	2 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Orange Body (Requires Wedgelock AW2P. Keyed Options Available.)	16	13A
	AW2P	2 Position, Receptacle Wedgelock, Green	-	-
	AW2P-A	2 Position, Receptacle Wedgelock, Keyed A, Grey	-	-
	AW2P-B	2 Position, Receptacle Wedgelock, Keyed A, Black	-	-
	AW2P-C	2 Position, Receptacle Wedgelock, Keyed A, Green	-	-
	AW2P-D	2 Position, Receptacle Wedgelock, Keyed A, Brown	-	-
	AT04-3P-SR01GRY	3 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Gray Body (Requires Wedgelock AW3P.)	16	13A
	AT04-3P-SR02GRY	3 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Grey Body (Requires Wedgelock AW3P.)	16	13A
	AT04-3P-SR01BLK	3 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AW3P.)	16	13A
	AT04-3P-SR02BLK	3 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Black Body (Requires Wedgelock AW3P.)	16	13A
	AT04-3P-SR01BLU	3 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AW3P.)	16	13A
	AT04-3P-SR02BLU	3 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Blue Body (Requires Wedgelock AW3P.)	16	13A
	AT04-3P-SR01BRN	3 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AW3P.)	16	13A
	AT04-3P-SR02BRN	3 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Brown Body (Requires Wedgelock AW3P.)	16	13A

Image	Part Number	Description	Size	Amp
	AT04-3P-SR01WHT	3 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AW3P.)	16	13A
	AT04-3P-SR02WHT	3 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, White Body (Requires Wedgelock AW3P.)	16	13A
	AT04-3P-SR01YEL	3 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AW3P.)	16	13A
	AT04-3P-SR02YEL	3 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Yellow Body (Requires Wedgelock AW3P.)	16	13A
	AT04-3P-SR01GRN	3 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AW3P.)	16	13A
	AT04-3P-SR02GRN	3 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Green Body (Requires Wedgelock AW3P.)	16	13A
	AT04-3P-SR01RED	3 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AW3P.)	16	13A
	AT04-3P-SR02RED	3 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Red Body (Requires Wedgelock AW3P.)	16	13A
	AT04-3P-SR01ORG	3 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AW3P.)	16	13A
	AT04-3P-SR02ORG	3 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Orange Body (Requires Wedgelock AW3P.)	16	13A
	AW3P	3 Position, Receptacle Wedgelock, Green	-	-
	AW3P-1939	3 Position, J1939 Receptacle Wedgelock, Blue	-	-

	AT04-4P-SR01GRY	4 Position, Receptacle, Pin, Strain Relief, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-SR02GRY	4 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Gray Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-SR01BLK	4 Position, Receptacle, Pin, Strain Relief, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-SR02BLK	4 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Black Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-SR01BLU	4 Position, Receptacle, Pin, Strain Relief, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-SR02BLU	4 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Blue Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-SR01BRN	4 Position, Receptacle, Pin, Strain Relief, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-SR02BRN	4 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Brown Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-SR01WHT	4 Position, Receptacle, Pin, Strain Relief, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-SR02WHT	4 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, White Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-SR01YEL	4 Position, Receptacle, Pin, Strain Relief, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-SR02YEL	4 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Yellow Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-SR01GRN	4 Position, Receptacle, Pin, Strain Relief, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-SR02GRN	4 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Green Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A

Image	Part Number	Description	Size	Amp
	AT04-4P-SR01RED	4 Position, Receptacle, Pin, Strain Relief, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-SR02RED	4 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Red Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-SR01ORG	4 Position, Receptacle, Pin, Strain Relief, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-SR02ORG	4 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Orange Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AW4P	4 Position, Receptacle Wedgelock, Green	-	-
	AW4P-A	4 Position, Receptacle Wedgelock, Keyed A, Grey	-	-
	AW4P-B	4 Position, Receptacle Wedgelock, Keyed A, Black	-	-
	AW4P-C	4 Position, Receptacle Wedgelock, Keyed A, Green	-	-
	AW4P-D	4 Position, Receptacle Wedgelock, Keyed A, Brown	-	-

	AT04-6P-SR01GRY	6 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AW6P.)	16	13A
	AT04-6P-SR02GRY	6 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Grey Body (Requires Wedgelock AW6P.)	16	13A
	AT04-6P-SR01BLK	6 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AW6P.)	16	13A
	AT04-6P-SR02BLK	6 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Black Body (Requires Wedgelock AW6P.)	16	13A
	AT04-6P-SR01BLU	6 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AW6P.)	16	13A
	AT04-6P-SR02BLU	6 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Blue Body (Requires Wedgelock AW6P.)	16	13A
	AT04-6P-SR01BRN	6 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AW6P.)	16	13A
	AT04-6P-SR02BRN	6 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Brown Body (Requires Wedgelock AW6P.)	16	13A
	AT04-6P-SR01WHT	6 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AW6P.)	16	13A
	AT04-6P-SR02WHT	6 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, White Body (Requires Wedgelock AW6P.)	16	13A
	AT04-6P-SR01YEL	6 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AW6P.)	16	13A
	AT04-6P-SR02YEL	6 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Yellow Body (Requires Wedgelock AW6P.)	16	13A
	AT04-6P-SR01GRN	6 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AW6P.)	16	13A
	AT04-6P-SR02GRN	6 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Green Body (Requires Wedgelock AW6P.)	16	13A
	AT04-6P-SR01RED	6 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AW6P.)	16	13A
	AT04-6P-SR02RED	6 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Red Body (Requires Wedgelock AW6P.)	16	13A
	AT04-6P-SR01ORG	6 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AW6P.)	16	13A
	AT04-6P-SR02ORG	6 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), SR02 Strain Relief, Orange Body (Requires Wedgelock AW6P.)	16	13A

Image	Part Number	Description	Size	Amp
	AW6P	6 Position, Receptacle Wedgelock, Green	-	-

	AT04-08PA-SRGRY	8 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), Keyed A, SR01 Strain Relief, Grey Body (Requires Wedgelock AW8P.)	16	13A
	AT04-08PA-SR2GY	8 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), Keyed A, SR02 Strain Relief, Grey Body (Requires Wedgelock AW8P.)	16	13A
	AT04-08PA-SRBK	8 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), Keyed A, SR01 Strain Relief, Black Body (Requires Wedgelock AW8P.)	16	13A
	AT04-08PA-SR2BK	8 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), Keyed A, SR02 Strain Relief, Black Body (Requires Wedgelock AW8P.)	16	13A
	AT04-08PB-SRBK	8 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), Keyed B, SR01 Strain Relief, Black Body (Requires Wedgelock AW8P.)	16	13A
	AT04-08PB-SR2BK	8 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), Keyed B, SR02 Strain Relief, Black Body (Requires Wedgelock AW8P.)	16	13A
	AT04-08PC-SRGN	8 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), Keyed C, SR01 Strain Relief, Green Body (Requires Wedgelock AW8P.)	16	13A
	AT04-08PC-SR2GN	8 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), Keyed C, SR02 Strain Relief, Green Body (Requires Wedgelock AW8P.)	16	13A
	AT04-08PD-SRBR	8 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), Keyed D, SR01 Strain Relief, Brown Body (Requires Wedgelock AW8P.)	16	13A
	AT04-08PD-SR2BR	8 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), Keyed D, SR02 Strain Relief, Brown Body (Requires Wedgelock AW8P.)	16	13A
	AW8P	8 Position, Receptacle Wedgelock, Green	-	-

	AT04-12PA-SRGRY	12 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), Keyed A, SR01 Strain Relief, Grey Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PA-SR2GY	12 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), Keyed A, SR02 Strain Relief, Gray Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PA-SRBK	12 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), Keyed A, SR01 Strain Relief, Black Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PA-SR2BK	12 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), Keyed A, SR02 Strain Relief, Black Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PB-SRBK	12 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), Keyed B, SR01 Strain Relief, Black Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PB-SR2BK	12 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), Keyed B, SR02 Strain Relief, Black Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PC-SRGN	12 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), Keyed C, SR01 Strain Relief, Green Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PC-SR2GN	12 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), Keyed C, SR02 Strain Relief, Green Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PD-SRBR	12 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), Keyed D, SR01 Strain Relief, Brown Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PD-SR2BR	12 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), Keyed D, SR02 Strain Relief, Brown Body (Requires Wedgelock AW12P.)	16	13A
	AW12P	12 Position, Receptacle Wedgelock, Green	-	-

Image	Part Number	Description	Size	Amp
	AT16-18PA-SR02	18 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), Keyed A, SR02 Strain Relief, Black Body (No Wedgelock Required.)	16	13A
	AT16-18PA-EKSR02	18 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), Keyed A, SR02 Strain Relief, Grey Body (No Wedgelock Required.)	16	13A
	AT16-18PB-SR02	18 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), Keyed B, SR02 Strain Relief, Black Body (No Wedgelock Required.)	16	13A
	AT16-18PC-SR02	18 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), Keyed C, SR02 Strain Relief, Black Body (No Wedgelock Required.)	16	13A
	AT16-18PC-EKSR02	18 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), Keyed C, SR02 Strain Relief, Green Body (No Wedgelock Required.)	16	13A
	AT16-18PD-SR02	18 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), Keyed D, SR02 Strain Relief, Black Body (No Wedgelock Required.)	16	13A
	AT16-18PD-EKSR02	18 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), Keyed D, SR02 Strain Relief, Brown Body (No Wedgelock Required.)	16	13A
	AT16-18PE-SR02	18 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), Keyed E, SR02 Strain Relief, Black Body (No Wedgelock Required.)	16	13A
	AT16-18PE-EKSR02	18 Position, Receptacle, Pin, Reduced Diameter Rear Seal (Green), Keyed E, SR02 Strain Relief, Grey Body (No Wedgelock Required.)	16	13A

AT Series™ SR01/02 - Accessories

	A114017-SR	Blank Sealing Plug, Size 16, Black	-	-
	AT13-217-1605	Blank Locking Sealing Plug, Size 16, White	-	-
	AT13-217-1605-SR	Blank Locking Sealing Plug, Size 16, Red	-	-