



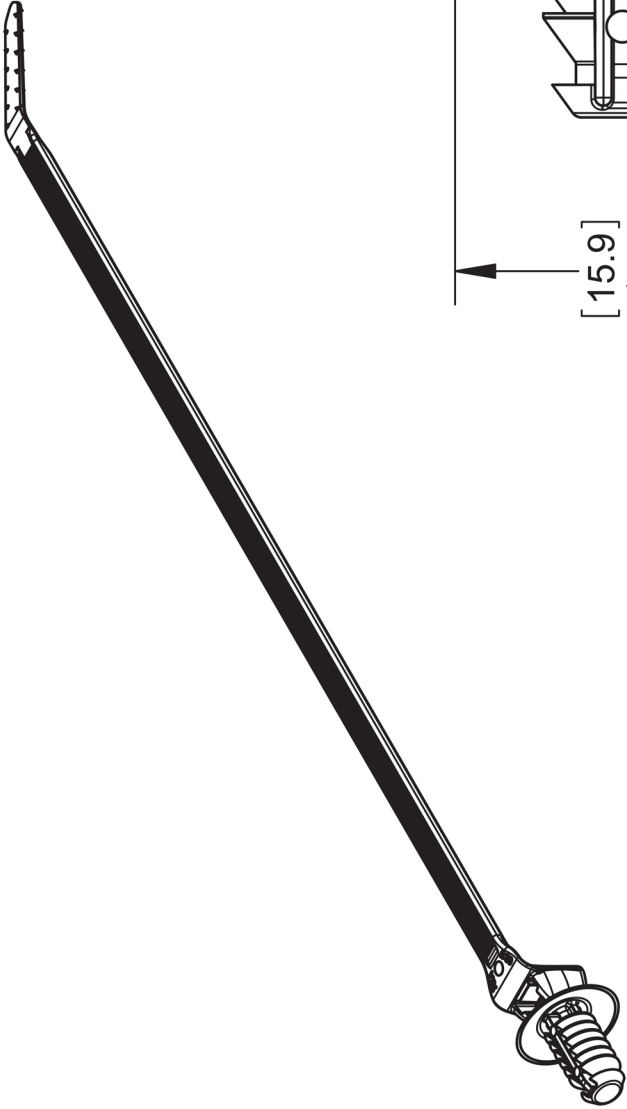



PERFORMANCE REQUIREMENTS:

- FIR TREE PUSH IN FORCE: 15LBS MAX IN A 6.6MM HOLE AND A SHEET METAL THICKNESS OF 1.8MM
- FIR TREE PULL OUT FORCE: 50LBS MIN IN A 6.6MM HOLE AND A SHEET METAL THICKNESS OF 1.8MM
- HOLE DIAMETER RANGE: 6.5MM - 7.2MM
- PANEL THICKNESS RANGE: .6MM - 8.5MM
- CABLE TIE TENSILE STRENGTH: 50LBS MIN
- MINIMUM BUNDLE DIAMETER: 1.6MM
- MAXIMUM BUNDLE DIAMETER: 50MM

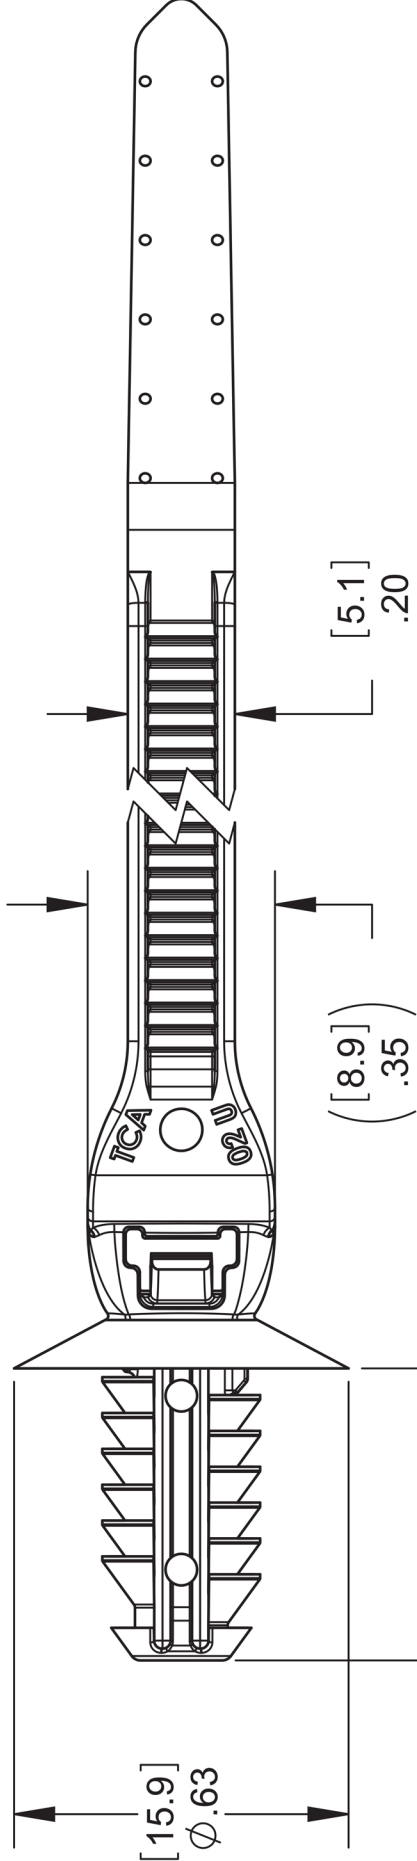

S. motorsport

• PROFESSIONAL MOTORSPORT WIRING [203]

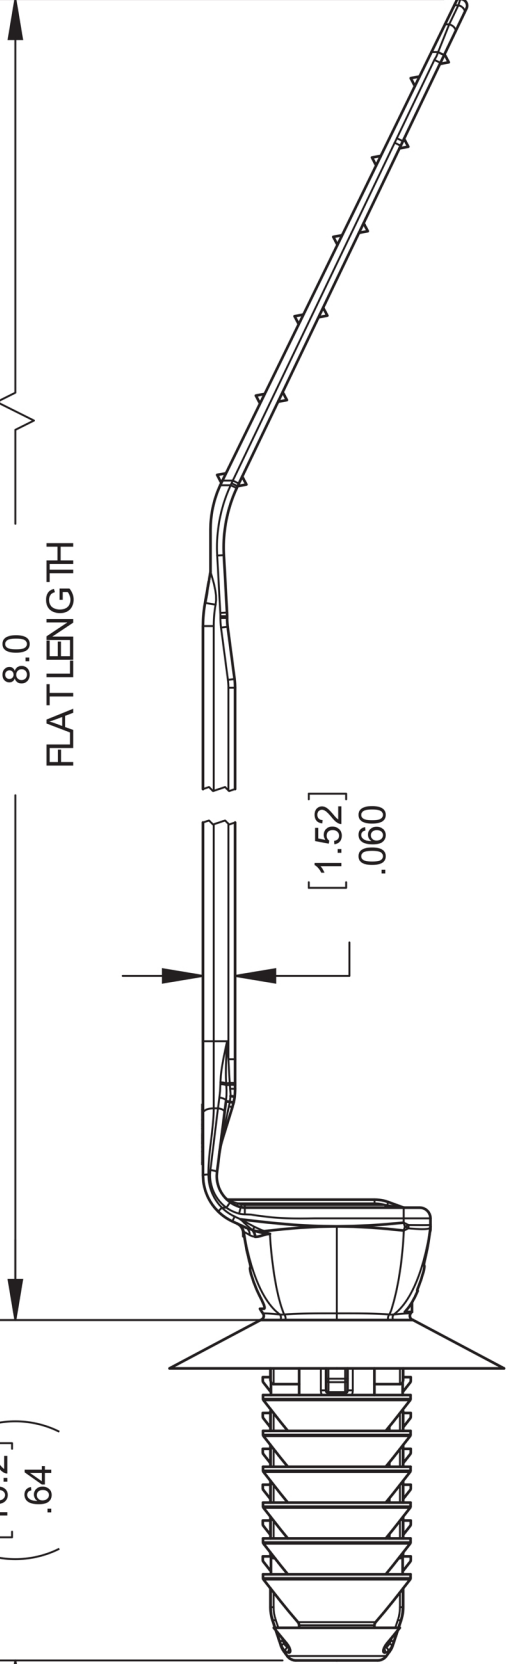

HellermannTytton

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON THIS DRAWING ARE EXCLUSIVE PROPERTY OF HELLERMANN TYTON

name	date		

DRAWING	level	04
by	JJP	
date	02/04/2009	
ECN #	011234	
part level	B/C	

DIMENSIONS	Tolerance	units
	. XXXX = [± .127] / ±0.005	
	. XXX = [± .25] / ±0.01	
	. XX = [± .5] / ±0.02	
	. X = [±6.4] / ±0.25	
	< = ±0.5°	
	unless otherwise specified	

number	T50ROSFT6LGU	phase	04	Production
name	CIRCULAR FIR TREE CABLE TIE			
material	NYLON 6/6 HS BLACK			

format	AH	SW 2007	2:1
version N	CAD	scale	
computer file name	ct06-027-011CST_04	previous drawing number	
drawn	JJP	checked	approved
date	03/07/2007		
Customer		sheet 1 of 1	
number	CT06-027-011CST		