


D


C

B


A

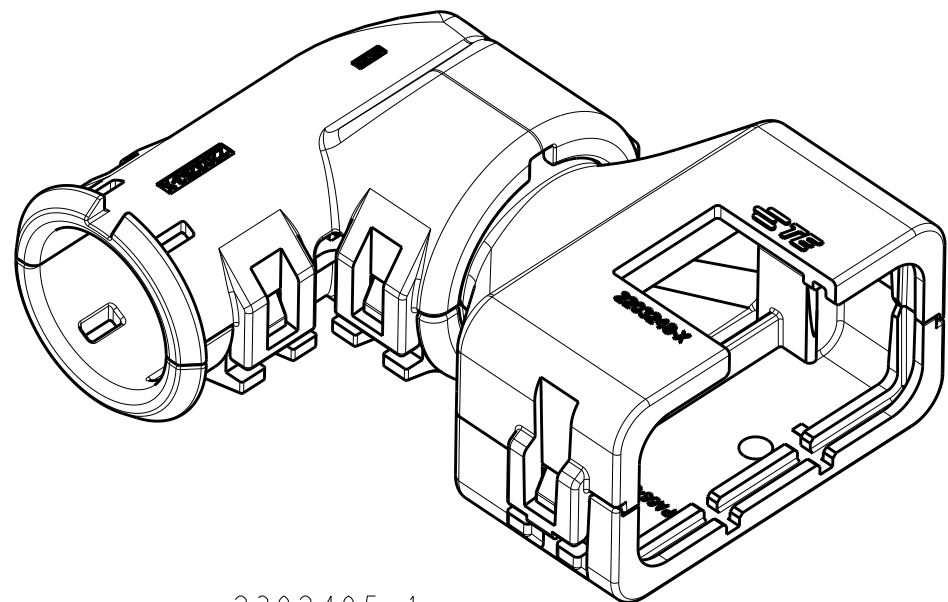


2302495-1
ASSEMBLED ISOMETRIC VIEW SHOWN

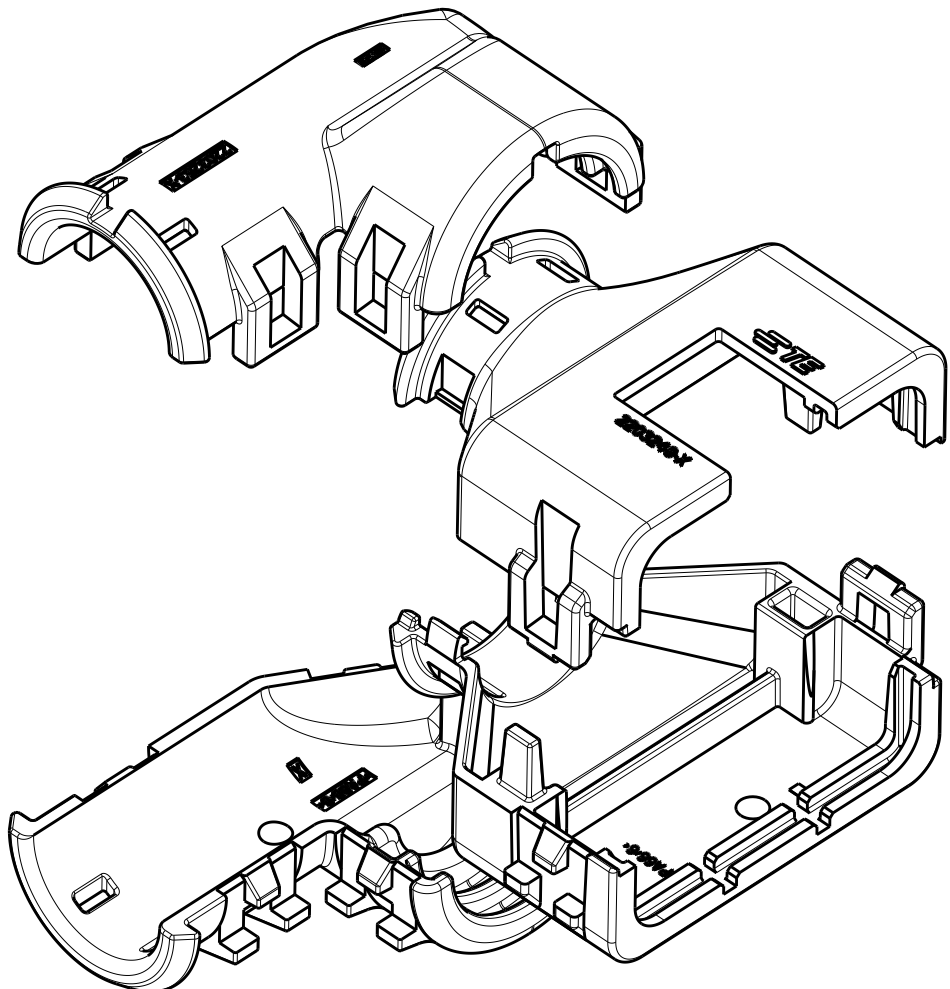


2302495-1
EXPLODED ISOMETRIC VIEW SHOWN
2 3

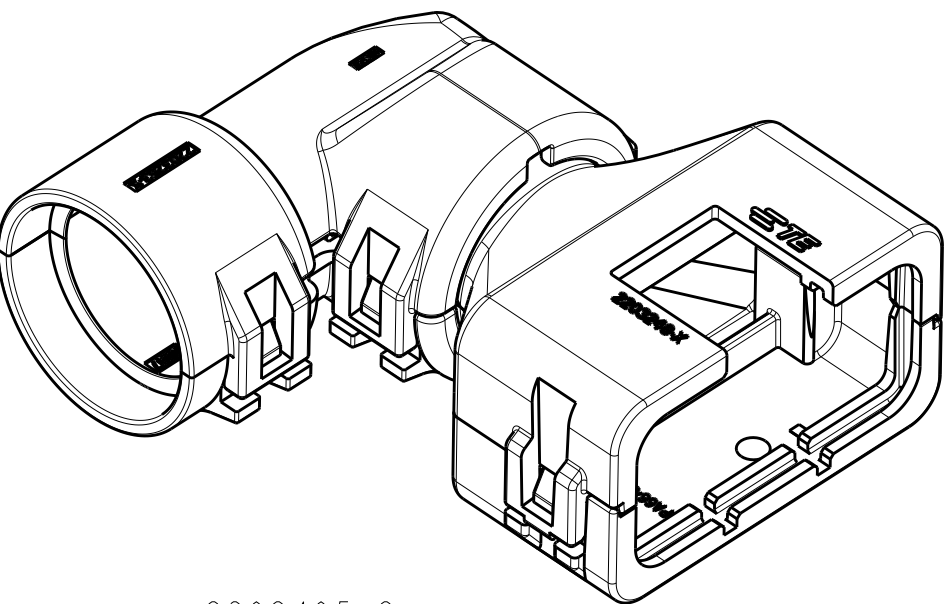


2302495-2
ASSEMBLED ISOMETRIC VIEW SHOWN

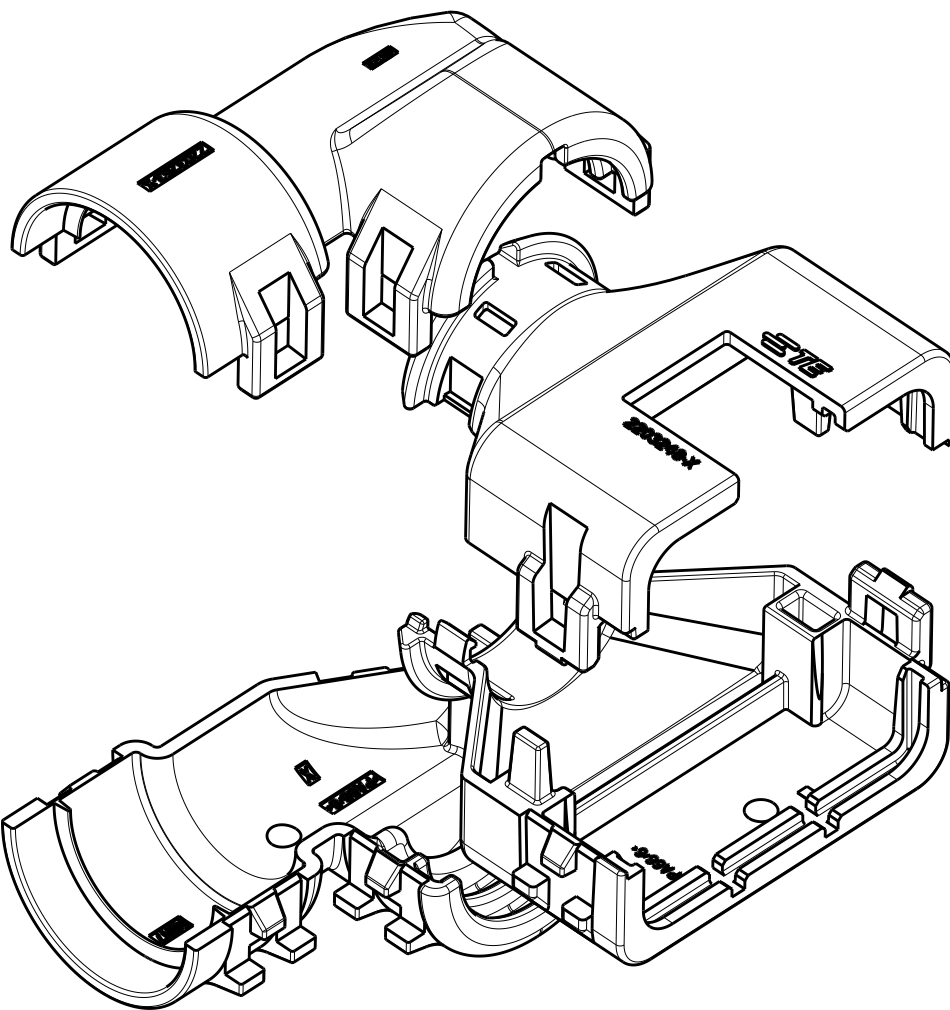




2302495-2
EXPLODED ISOMETRIC VIEW SHOWN
2 3

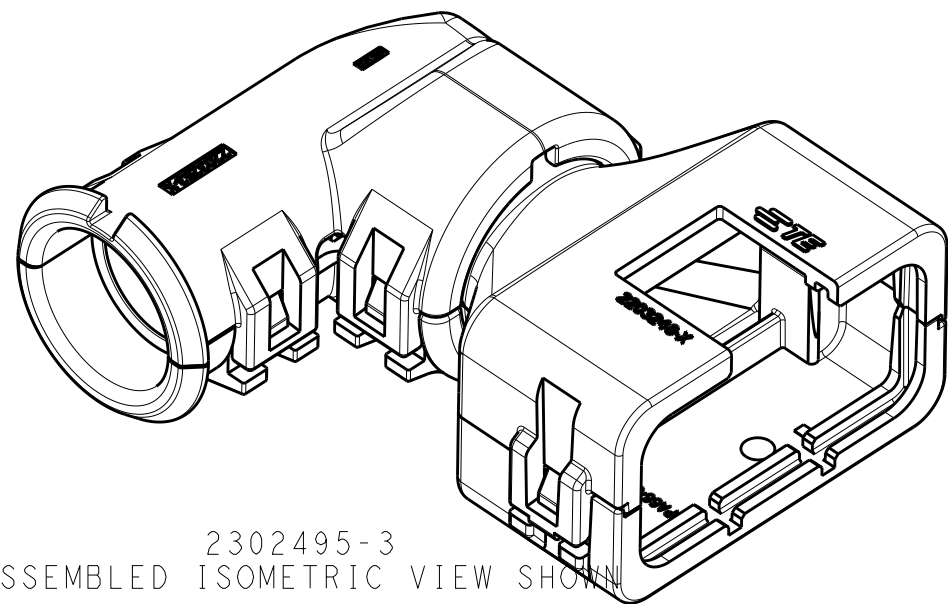

2302495-3
ASSEMBLED ISOMETRIC VIEW SHOWN

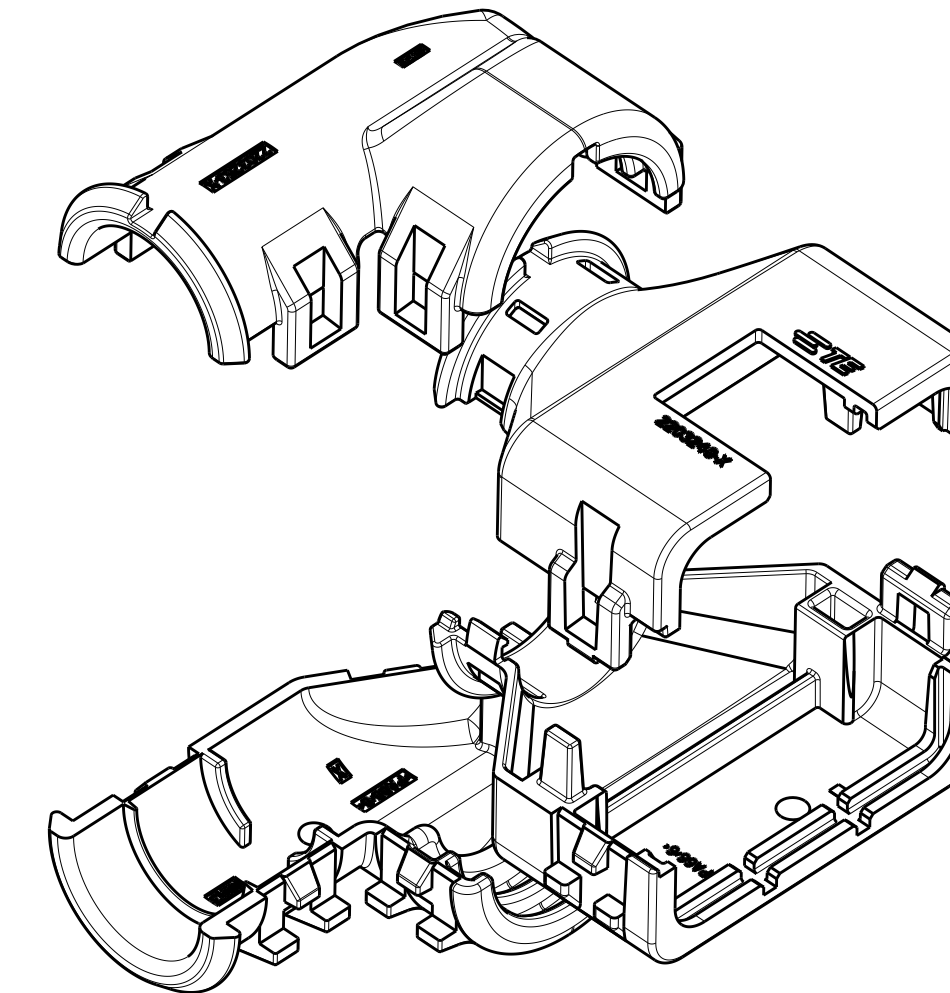




2302495-3
EXPLODED ISOMETRIC VIEW SHOWN
2 3

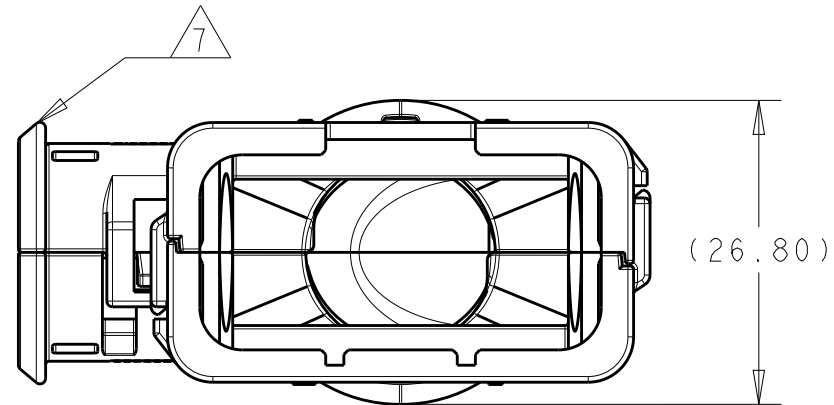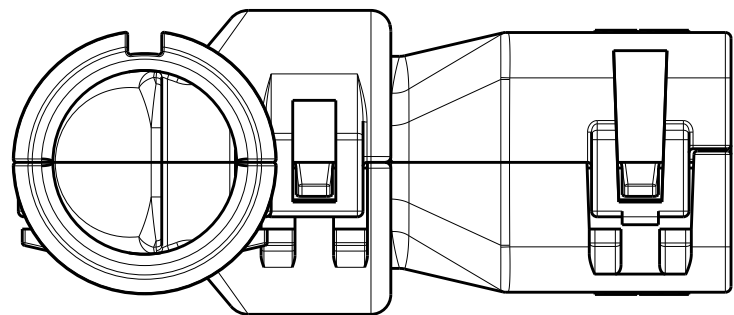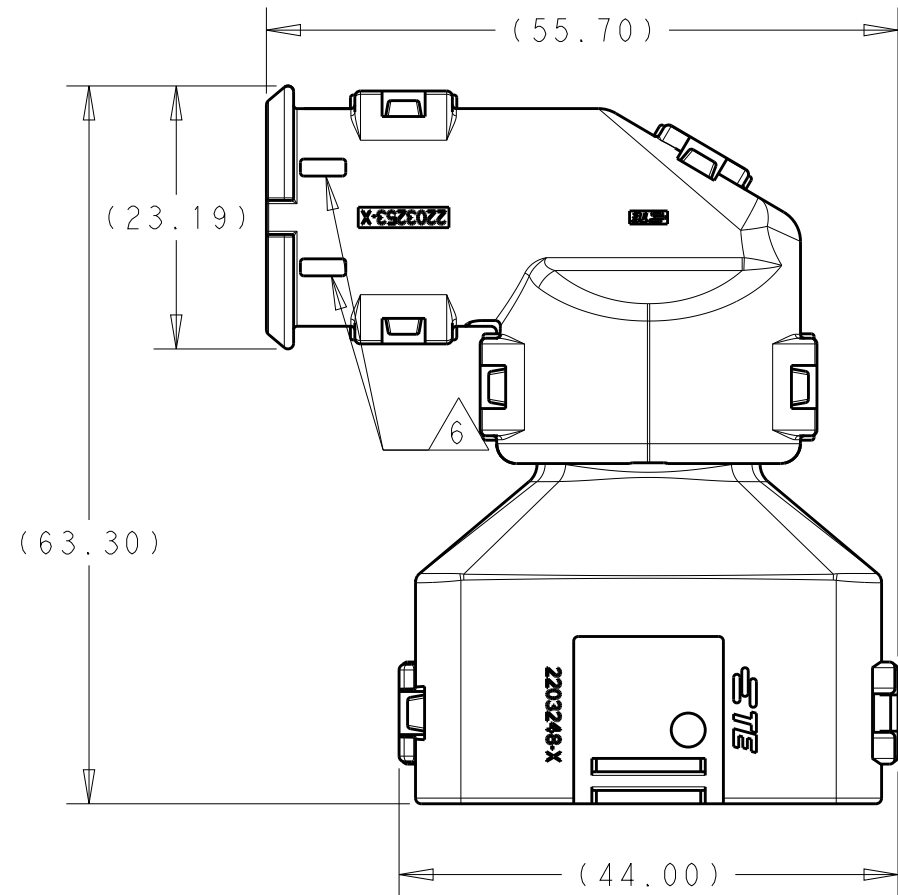

2302495-1
ASSEMBLED VIEW SHOWN
DIMENSIONS SHOWN TYPICAL FOR 2302495-1 AND -3
4

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED PER ECO-16-008203	01JUN2016	JM	RB
	A2	REV PER ECO-16-013256	08SEP2016	JM	RB

- 1 MATERIAL: NYLON MOLDING COMPOUND, BLACK, PA66/6.
- 2 BACKSHELL DESIGNED SUCH THAT TWO HALVES ATTACH TO ONE ANOTHER AND CLAMP AROUND THE CONNECTOR COVER.
- 3 ELBOW DESIGNED SUCH THAT TWO HALVES ATTACH TO ONE ANOTHER AND CLAMP AROUND THE BACKSHELL COLLAR.
- 4 DIMENSIONS TO BE MEASURED WHEN ELBOWS AND BACKSHELLS ASSEMBLED.
- 5 PRODUCT WEIGHTS:
2302495-1: 15.05g ASSEMBLED
2302495-2: 15.50g ASSEMBLED
2302495-3: 15.25g ASSEMBLED
- 6 4MM WIDE SLOTS FOR TIE WRAP TO SECURE HARNESS WIRES (-1 ONLY).
- 7 HEAT SHRINK TUBING FEATURE (-1 AND -3 ONLY).
8. INSTRUCTION SHEET: 408-151043.
9. CONDUIT PROFILE: NORMAL ONLY.

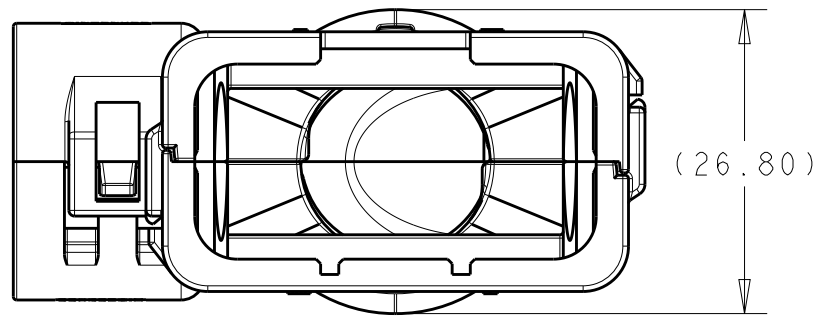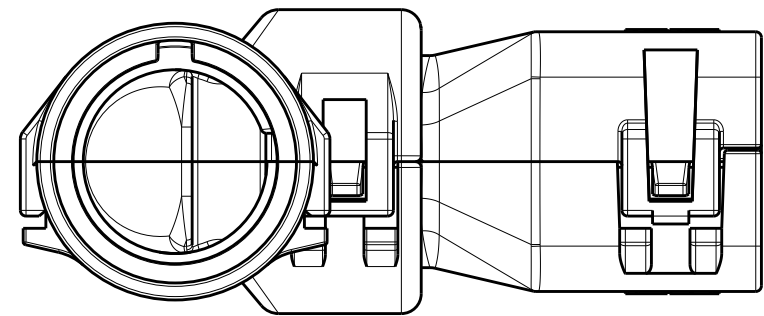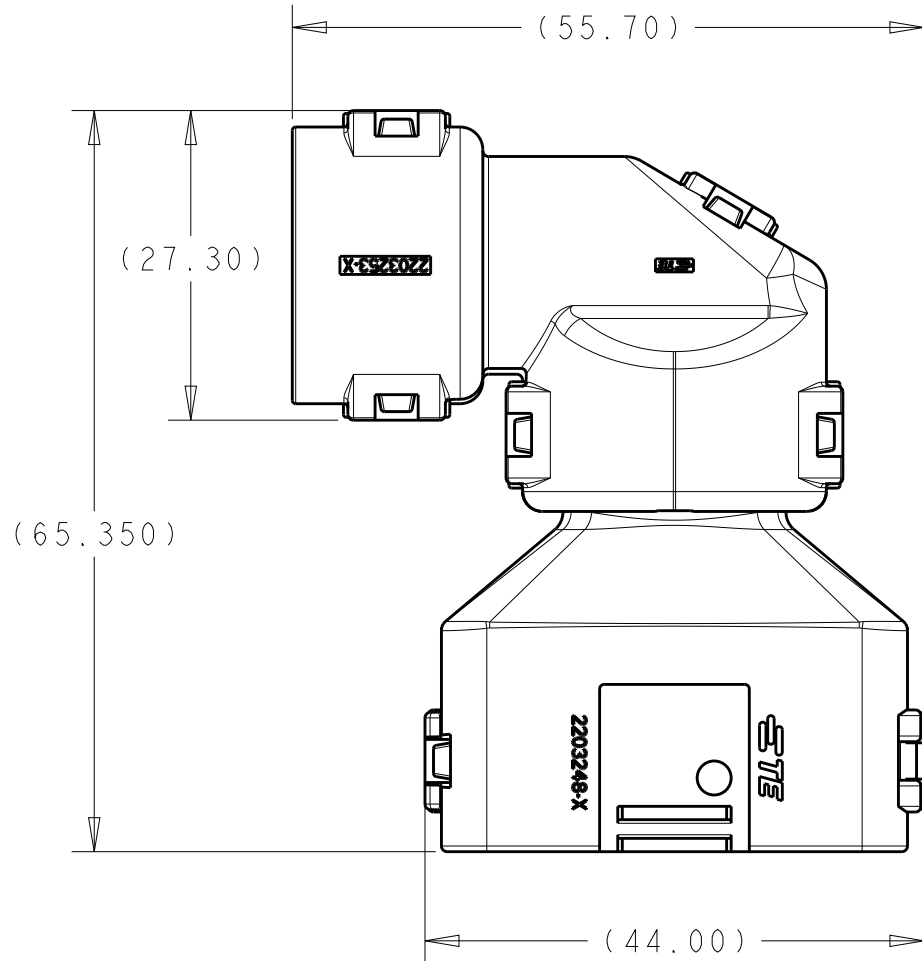

2302495-2
ASSEMBLED VIEW SHOWN
DIMENSIONS SHOWN FOR 2302495-2 ONLY
4

776437-X 776533-X	NC16	NW13	2302495-3
	NC20	NW17	2302495-2
	SMOOTH	SMOOTH	2302495-1
FITS ON PLUG ASSY	CORREGATE NC	CORREGATE NW	PART NUMBER
	CONDUIT SIZE		

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	MCNEAL	13APR2016	 TE Connectivity						
				CHK	R BALTER	13APR2016							
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	R BALTER	13APR2016	NAME	BACKSHELL AND ELBOW KIT, 12 POSN PLUG ASSY, AMPSEAL 16					
mm[INCHES]				PRODUCT SPEC									
				108-151043		APPLICATION SPEC							
						SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
MATERIAL		FINISH		WEIGHT		A1		100779		C2302495		-	
1				5		CUSTOMER DRAWING		SCALE		3:2		SHEET 1 OF 1 REV A2	