
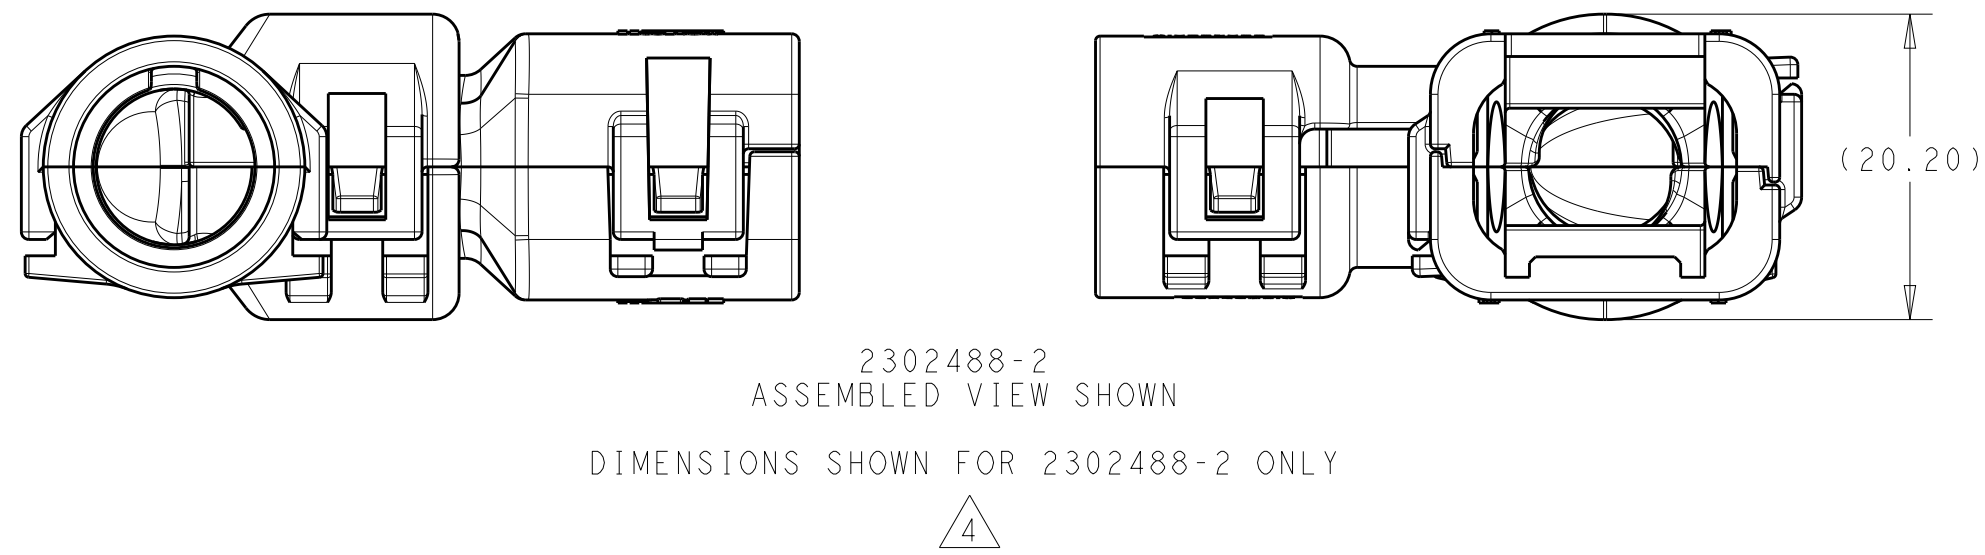
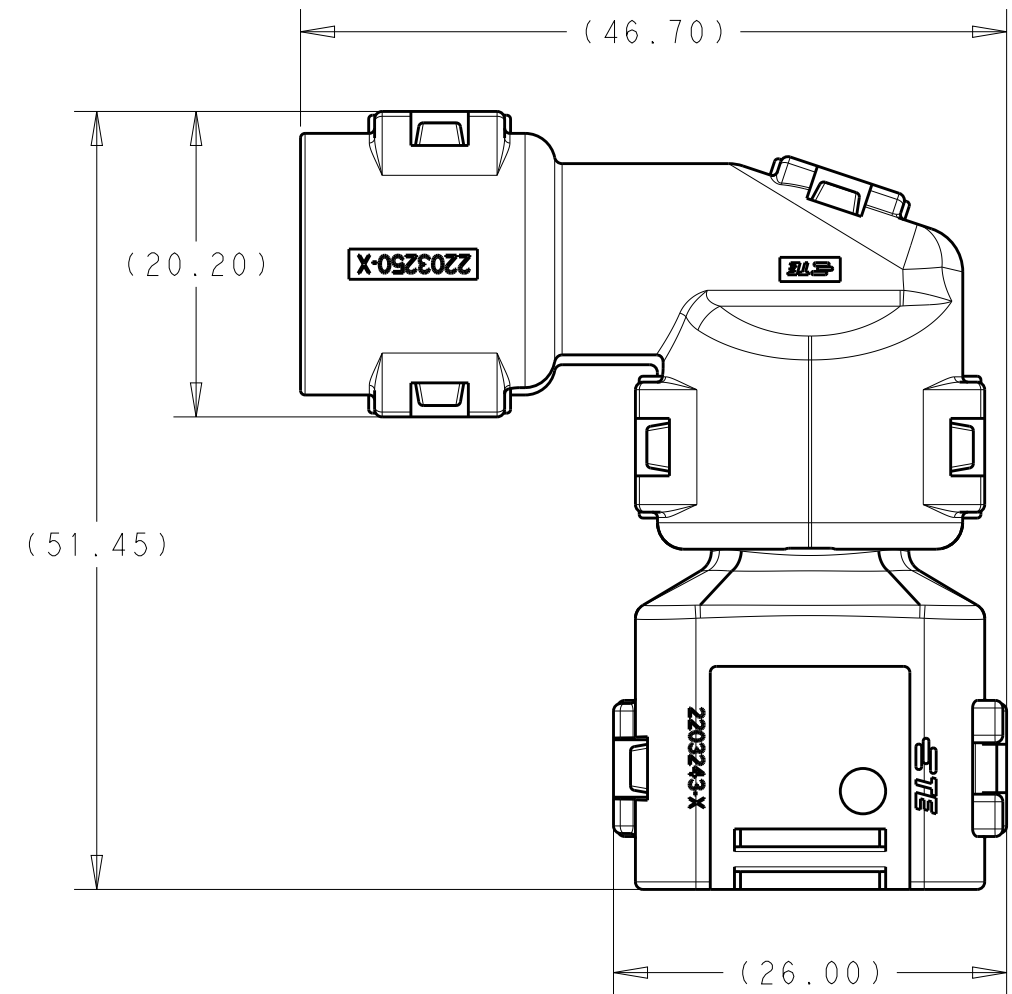
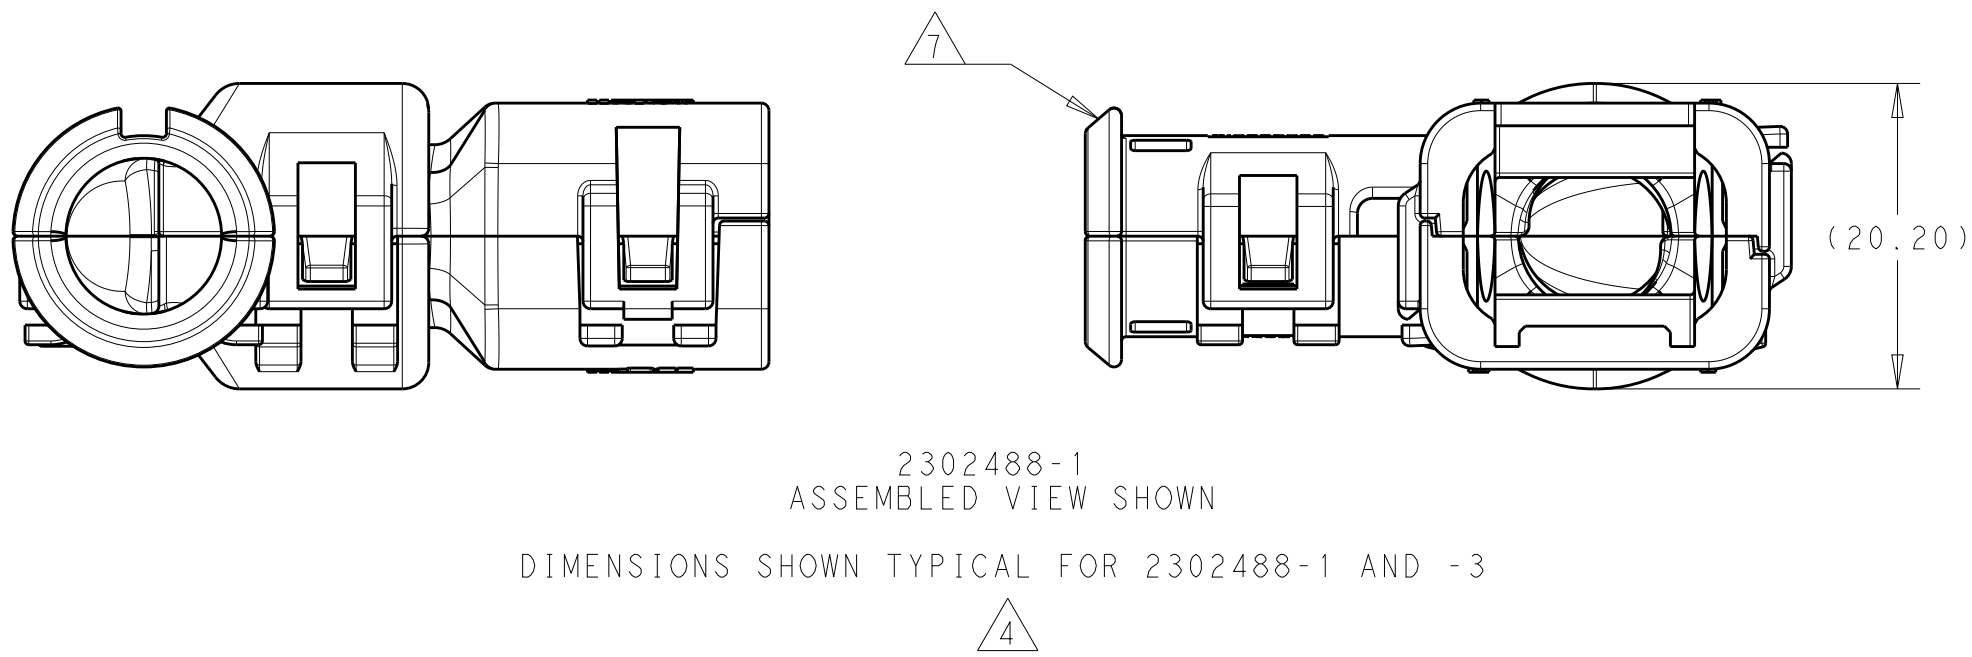
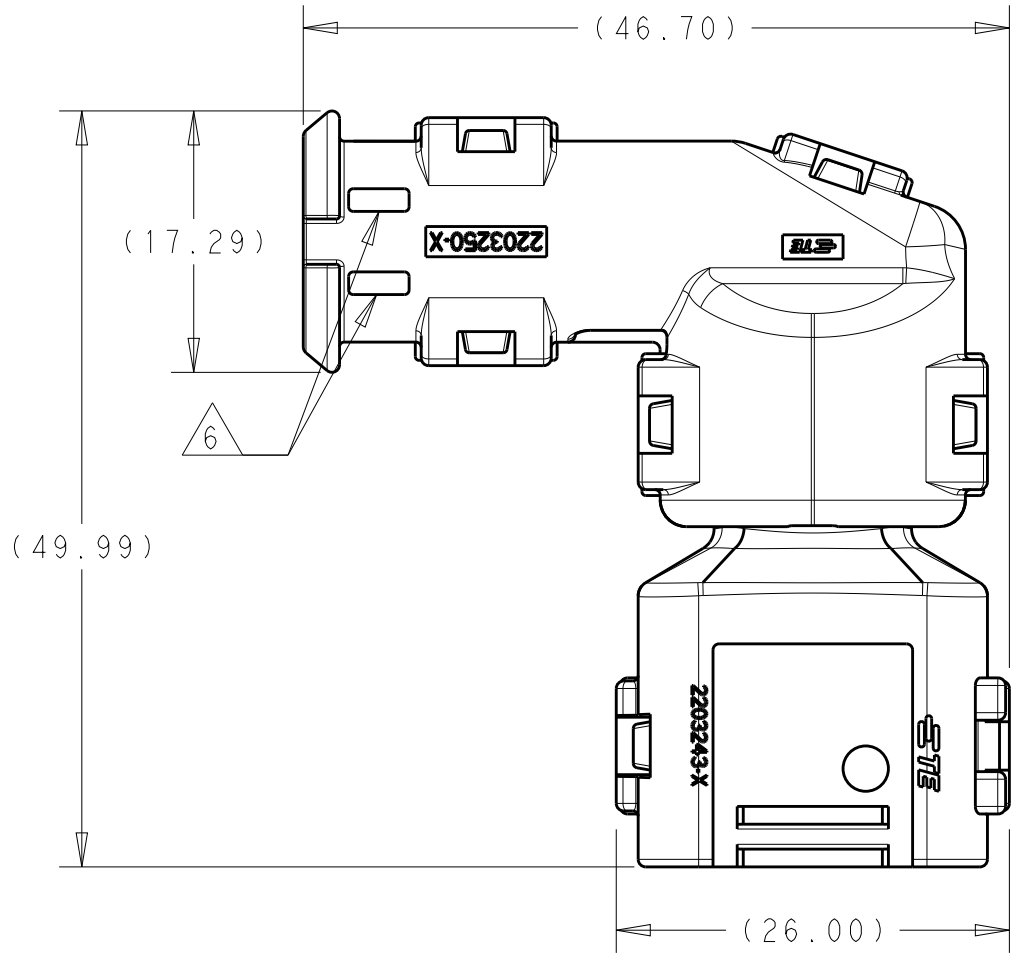
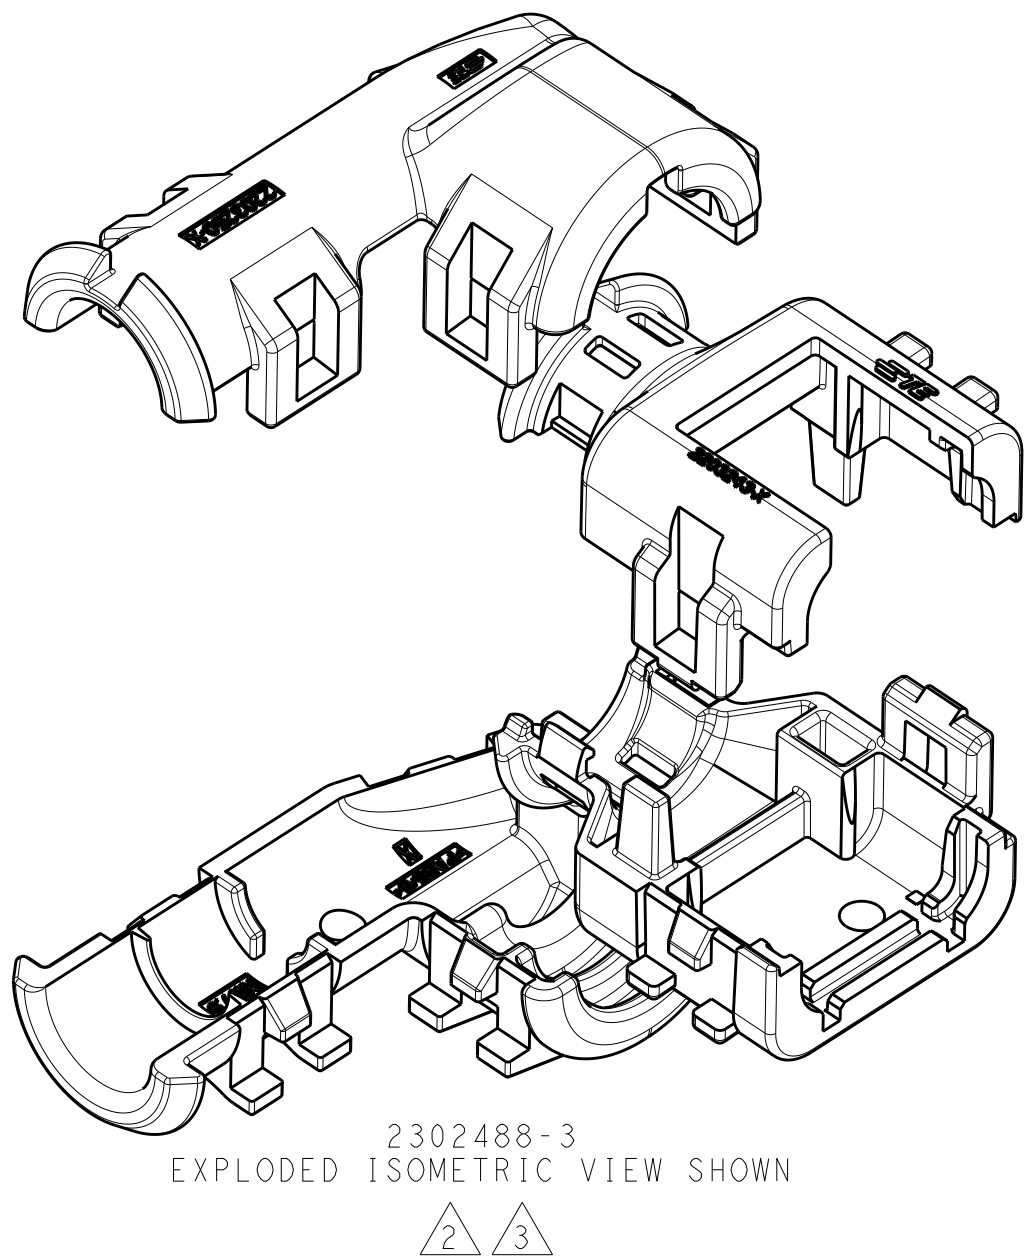
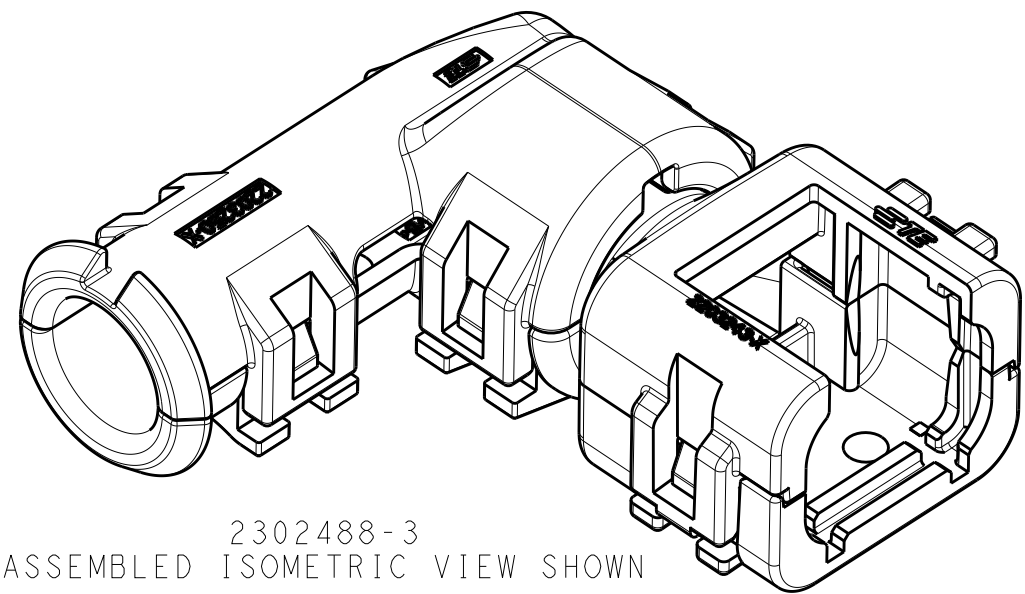
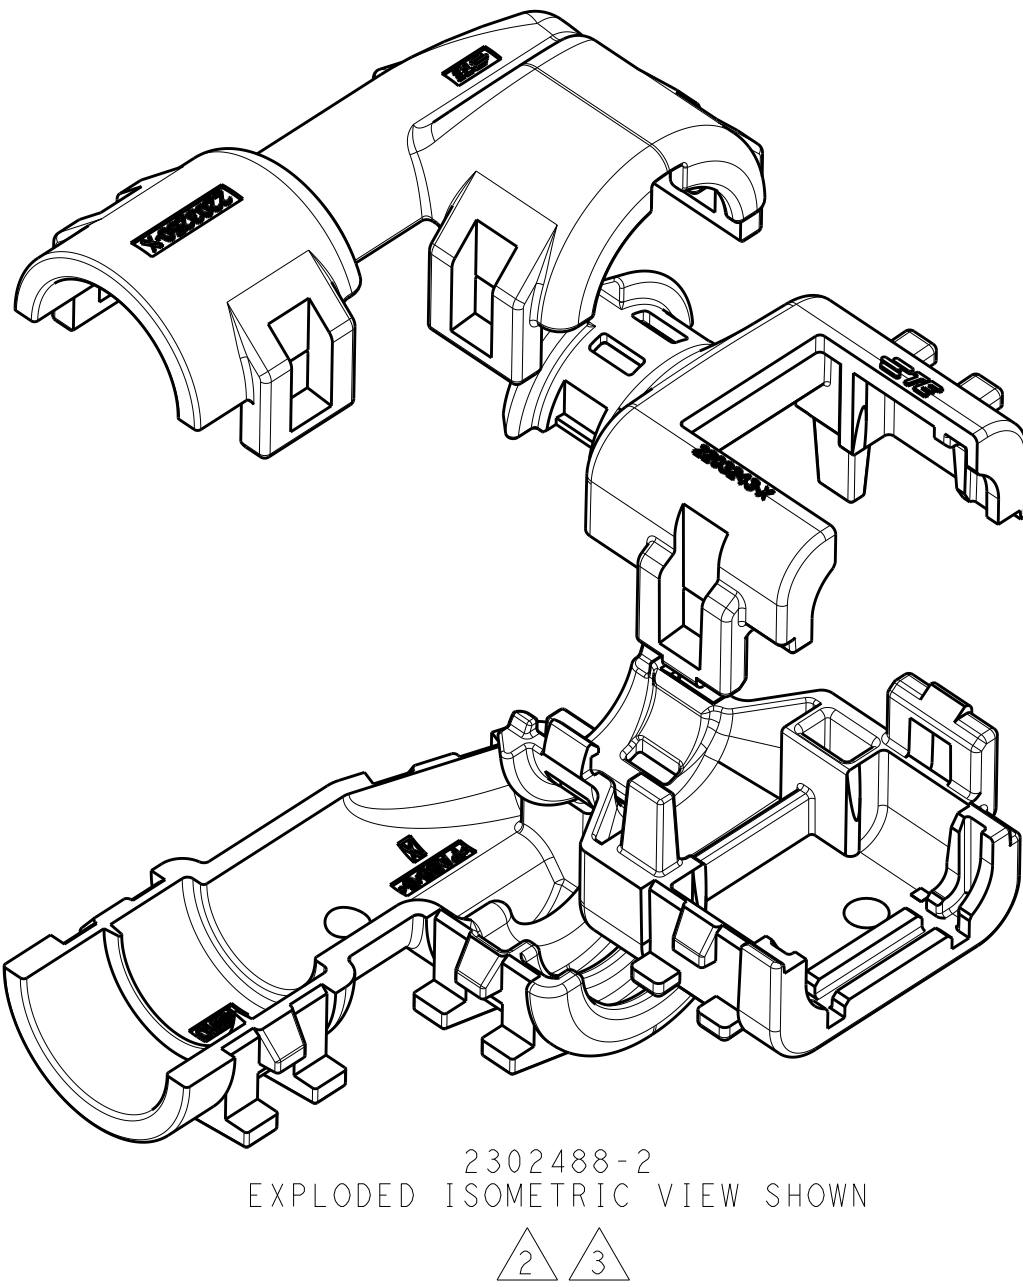
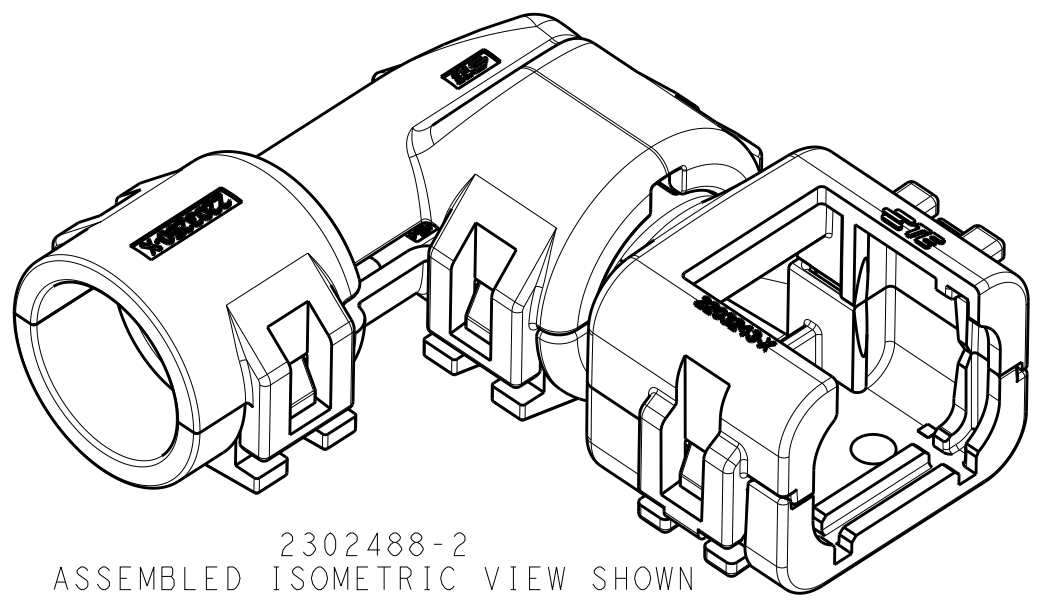
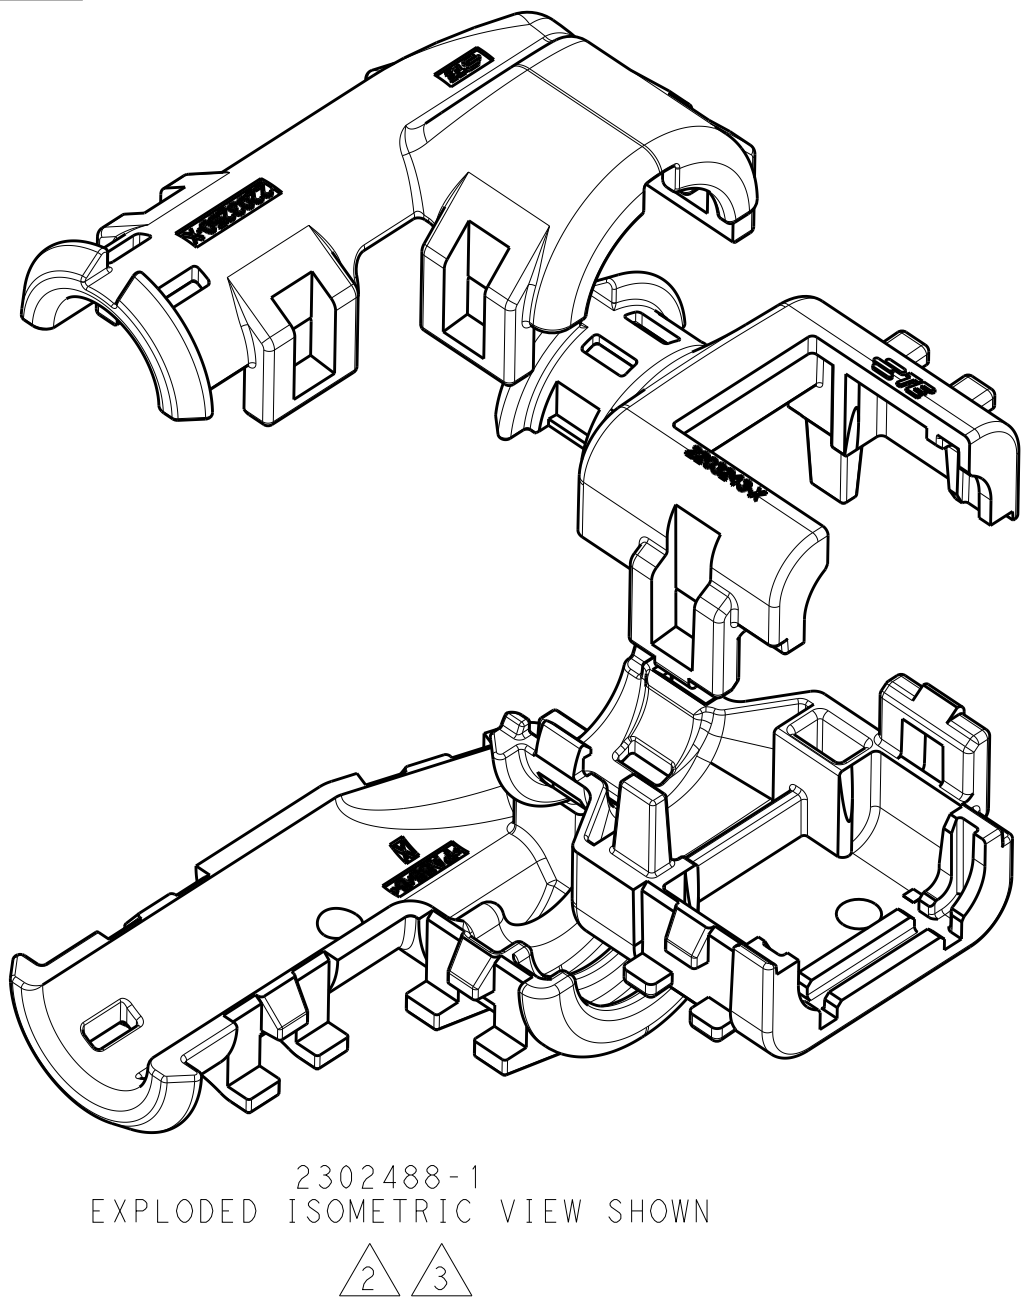


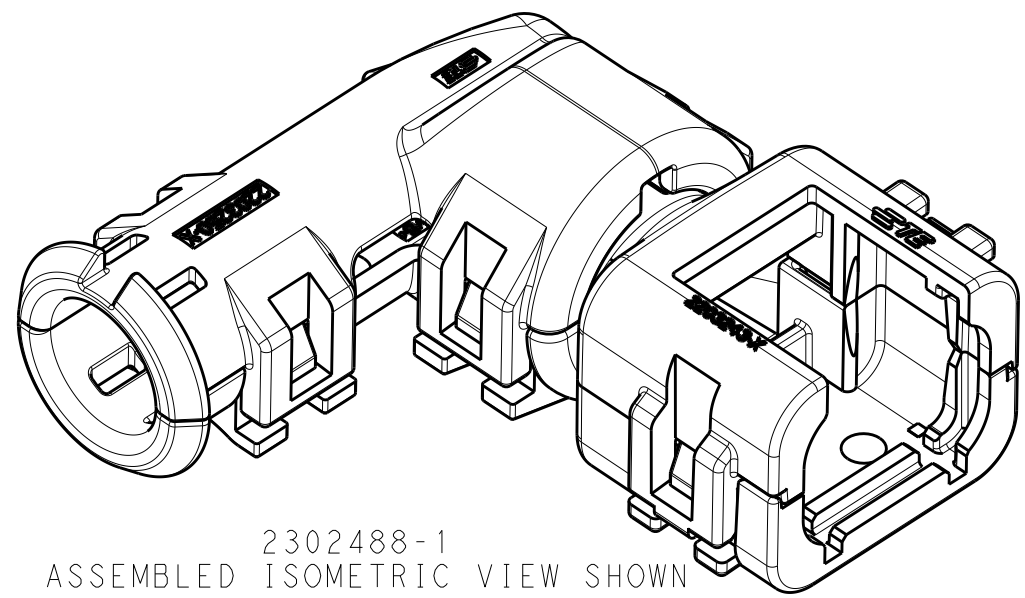

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
A		RELEASED PER ECO-16-007279	12MAY2016	JM	RB
A2		REV PER ECO-16-013256	08SEP2016	JM	RB

- 1 MATERIAL: NYLON MOLDING COMPOUND, BLACK, PA66/6.
- 2 BACKSHELL DESIGNED SUCH THAT TWO HALVES ATTACH TO ONE ANOTHER AND CLAMP AROUND THE CONNECTOR COVER.
- 3 ELBOW DESIGNED SUCH THAT TWO HALVES ATTACH TO ONE ANOTHER AND CLAMP AROUND THE BACKSHELL COLLAR.
- 4 DIMENSIONS TO BE MEASURED WHEN ELBOWS AND BACKSHELLS ASSEMBLED.
- 5 PRODUCT WEIGHTS:
2302488-1: 9.10g ASSEMBLED
2302488-2: 9.75g ASSEMBLED
2302488-3: 9.20g ASSEMBLED
- 6 4mm WIDE SLOTS FOR TIE WRAP TO SECURE HARNESS WIRES (-1 ONLY).
- 7 HEAT SHRINK TUBING FEATURE (-1 AND -3 ONLY).
8. INSTRUCTION SHEET: 408-151043.
9. CONDUIT PROFILE: NORMAL ONLY.

776427-X 776522-X	NC08	NW7.5	2302488-3
	NC12	NW10	2302488-2
	SMOOTH	SMOOTH	2302488-1
FITS ON PLUG ASSY	CORREGATE NC	CORREGATE NW	PART NUMBER
CONDUIT SIZE			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J MCNEAL 13APR2016	TE Connectivity	
DIMENSIONS:		CHK R BALTER 13APR2016		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD R BALTER 13APR2016	NAME	
	0 PLC	±	PRODUCT SPEC	
	1 PLC	±	108-151043	
	2 PLC	±	APPLICATION SPEC	
	3 PLC	±	-	
MATERIAL	FINISH	WEIGHT	SIZE	CAGE CODE
1	-	5	A1	00779
CUSTOMER DRAWING		DRAWING NO	RESTRICTED TO	
		2302488	A	
		SCALE	SHEET	OF
		2:1	1	1
		REV	A2	