

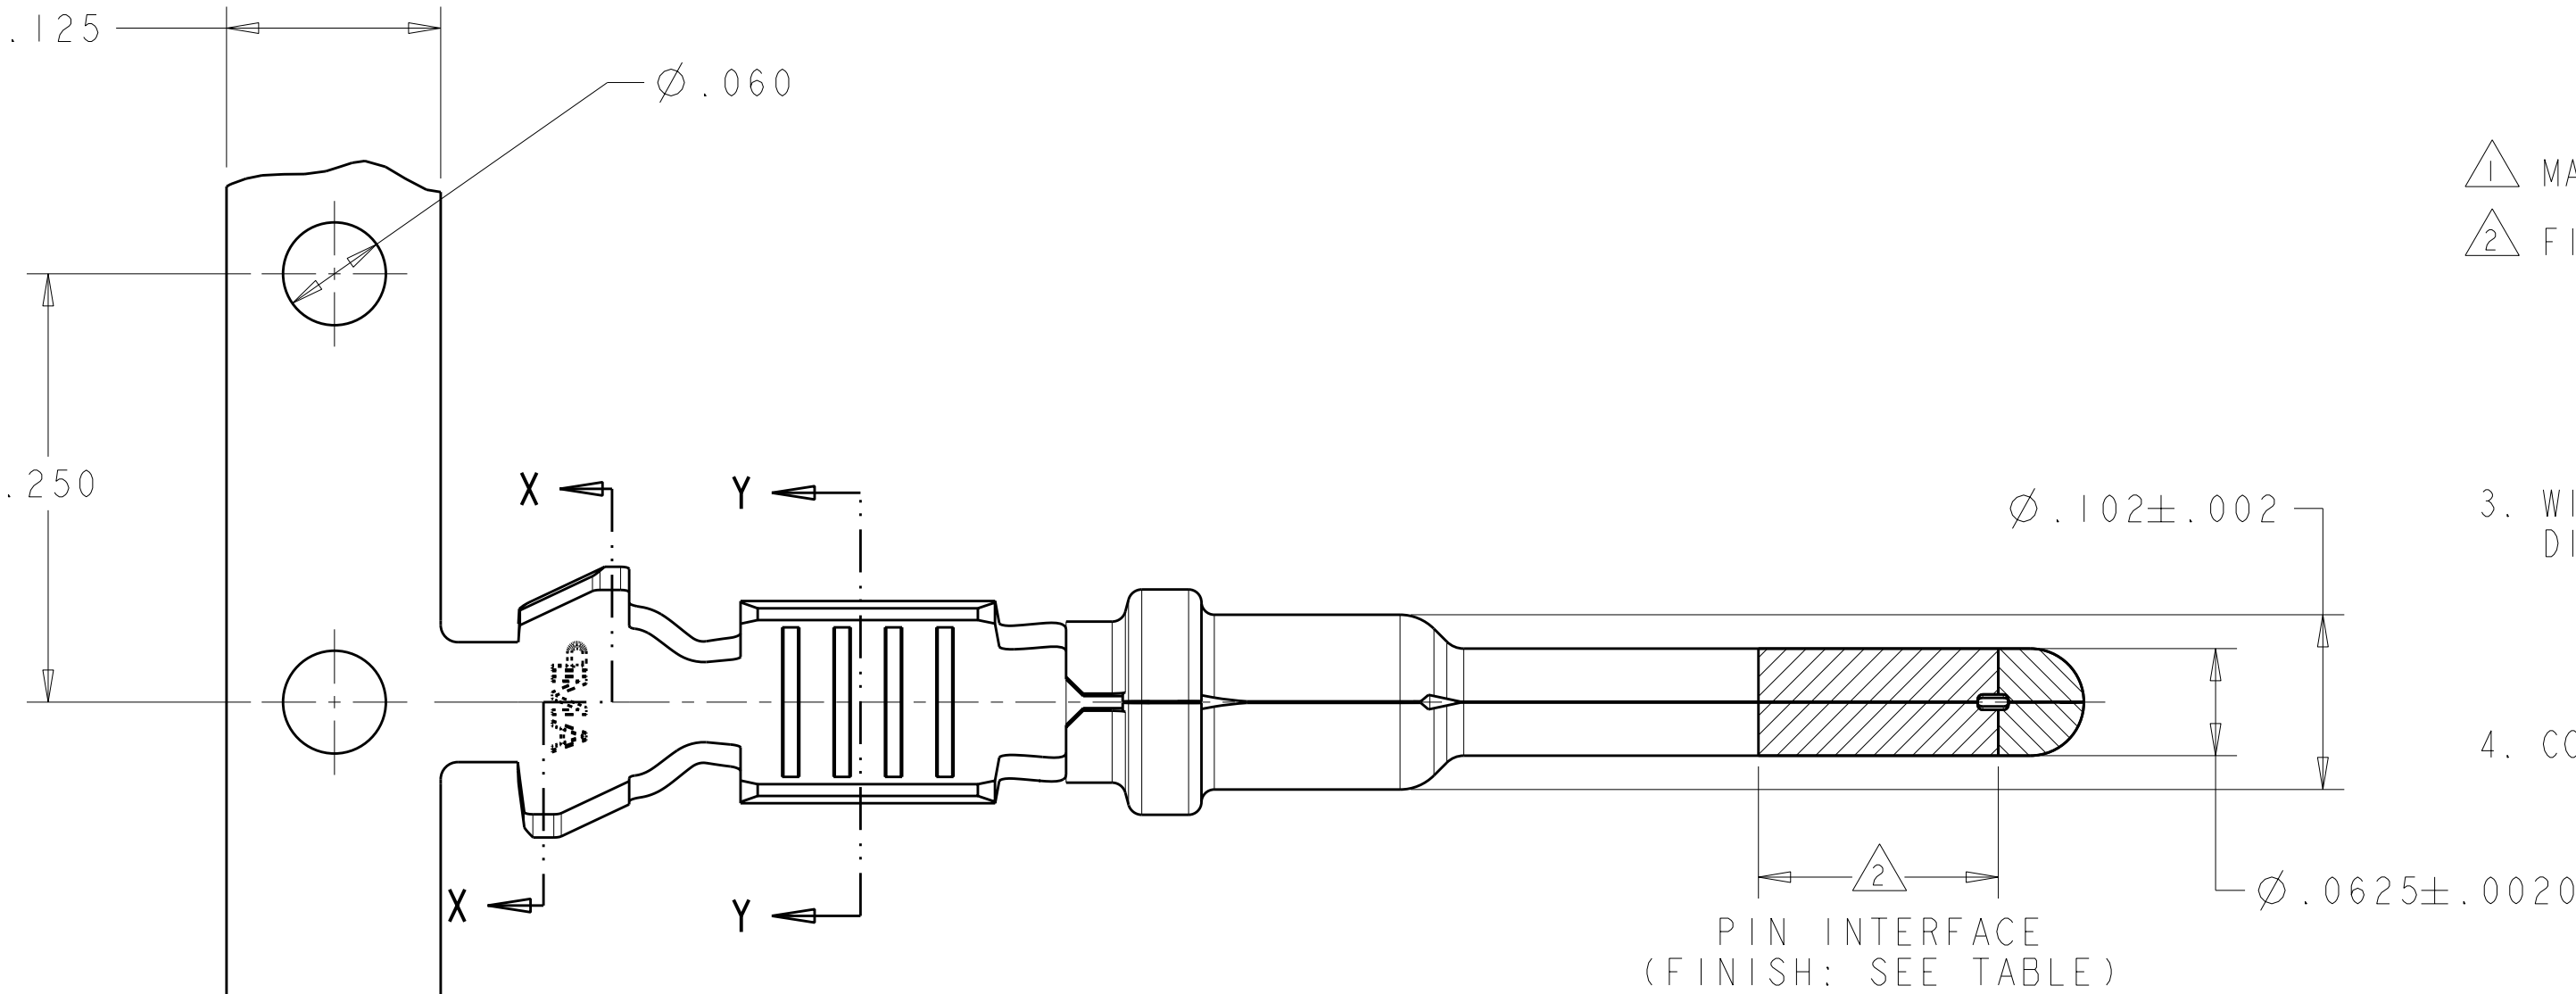


LOC	DIST	REVISIONS					
FX	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	RELEASED PER ECO-10-008447	21APR2010	DLD	MPT

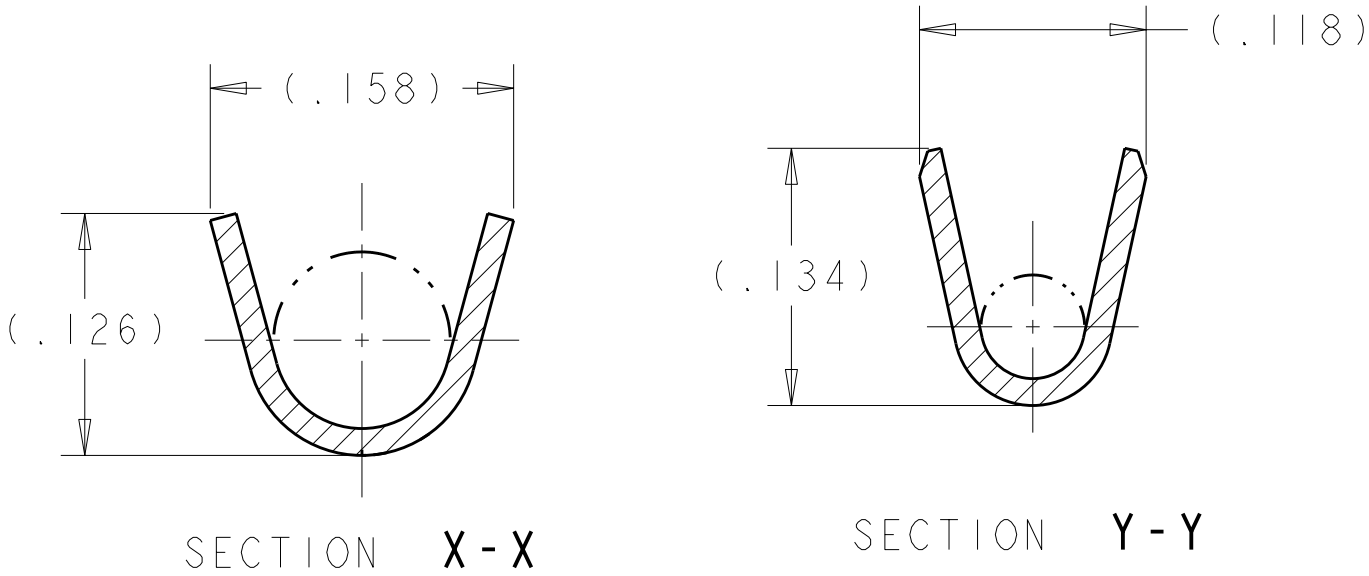

- 1 MATERIAL: .014 THICK COPPER ALLOY.
- 2 FINISH:
ALL OVER: .000040 - .000080 THICK NICKEL
WIRE BARREL: .000100 - .000200 THICK TIN
PIN INTERFACE: SEE TABLE
FOR P/N 2098250-1 ONLY: .000030 MIN THICK GOLD
3. WIRE RANGE: 18AWG - 1.5mm² WIRE WITH INSULATION DIAMETERS OF Ø.065 - Ø.118 INCHES.
NOTE: THE CONNECTOR THIS TERMINAL IS ASSEMBLED INTO MAY LIMIT THE SUITABLE INSULATION DIAMETER RANGE BASED ON THE TERMINAL REMOVAL CONFIGURATION.
4. CONTACT WILL BE LUBED WITH LUBRICANT PER TE P/N 22014-4.

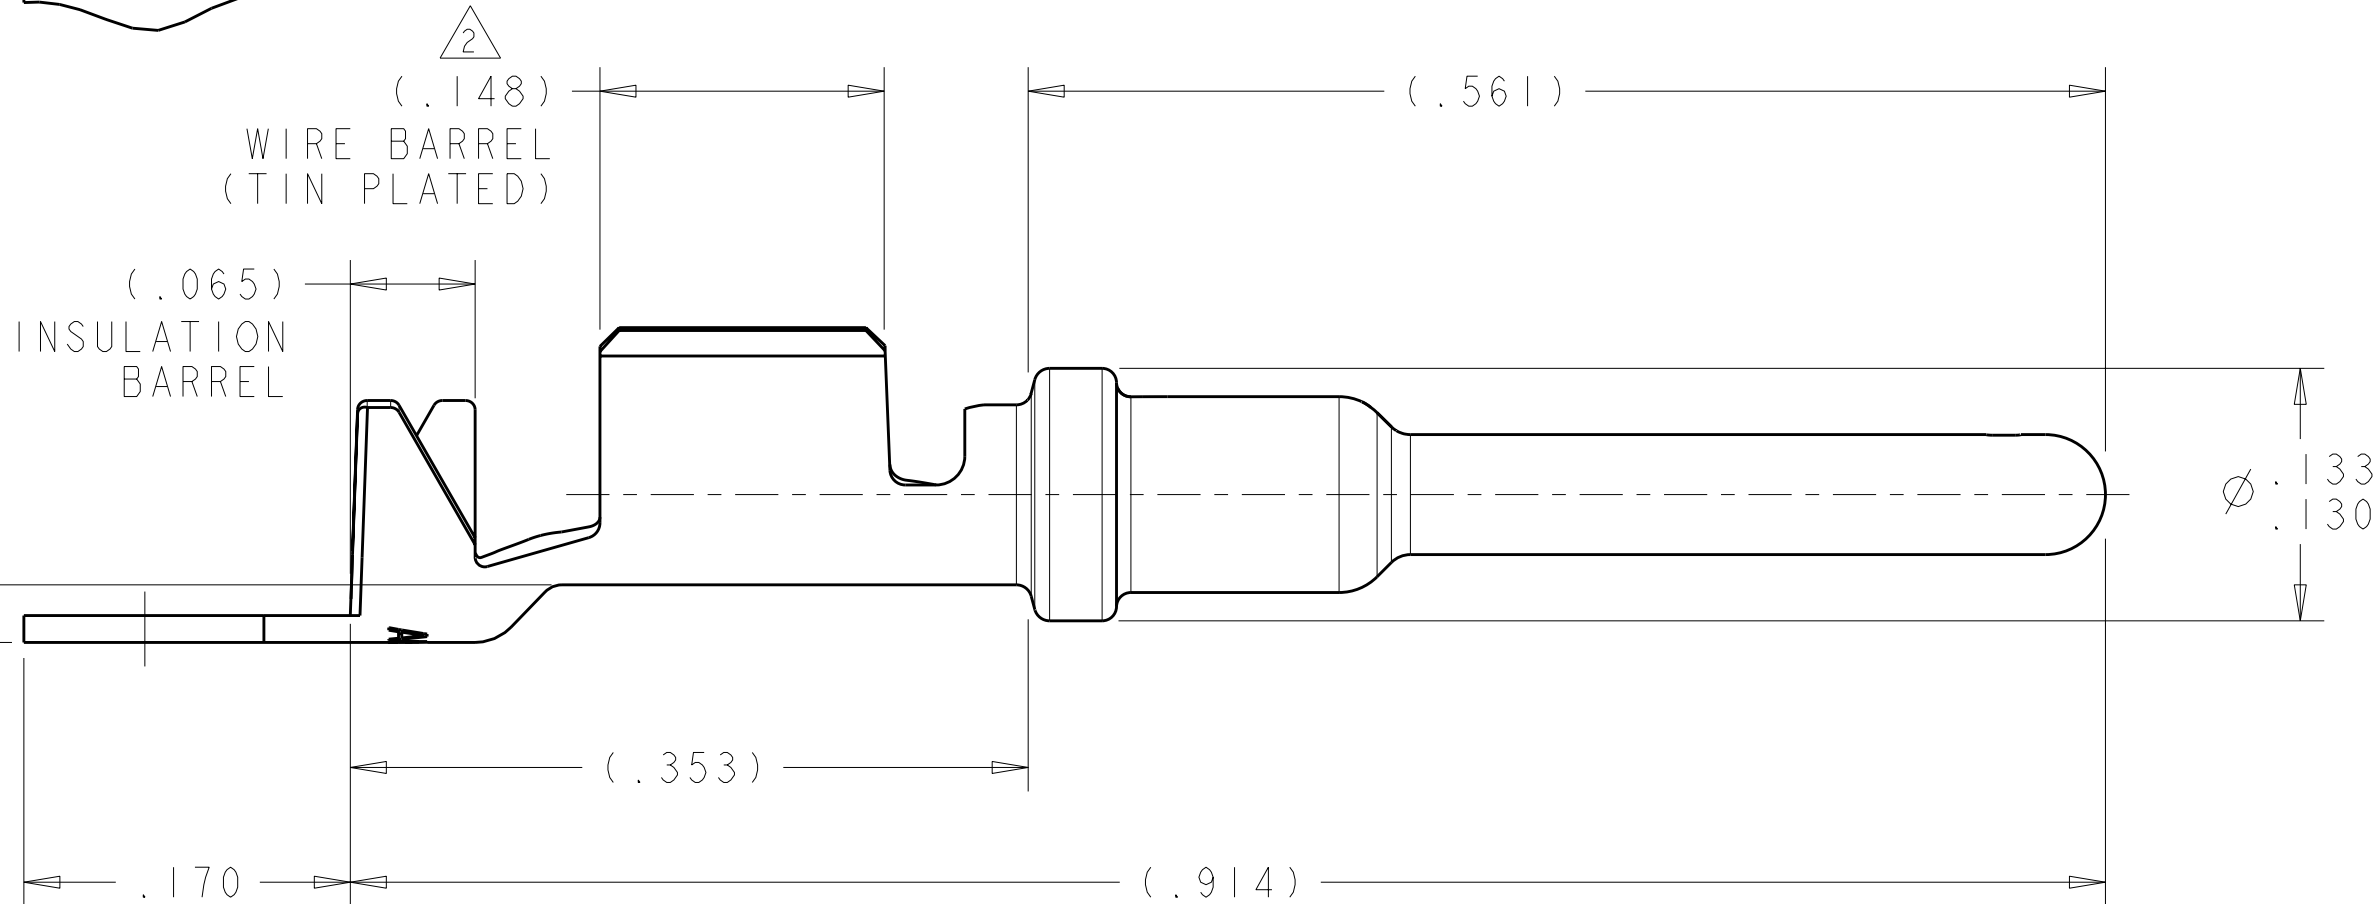

NICKEL	2098250-3
GOLD	2098250-1
FINISH PIN INTERFACE (REFERENCE)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN R. VESTAL 10JUN2009	Tyco Electronics Harrisburg, PA 17105-3608				
DIMENSIONS: INCHES		CHK J. SANDBURG 10JUN2009	NAME PIN CONTACT, SIZE 16, 18 AWG TO 1.5 SQ. MM WIRE				
		APVD J. SANDBURG 10JUN2009					
MATERIAL 	TOLERANCES UNLESS OTHERWISE SPECIFIED: 	PRODUCT SPEC -	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
		APPLICATION SPEC 114-13045	A2	00779	C-2098250	-	
		WEIGHT -	CUSTOMER DRAWING				
				SCALE	10:1	SHEET	OF
							1