



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE	08APR2021	MK	BC

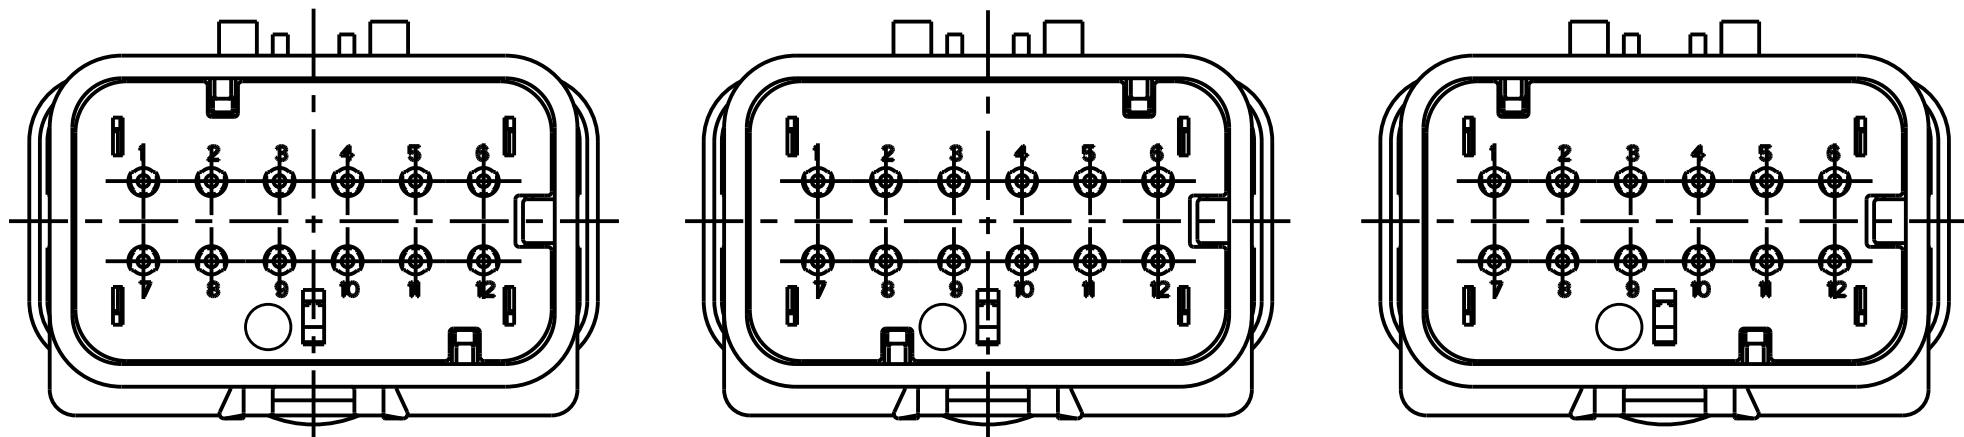

2320931-2
KEY B
SCALE 2:1


2320931-3
KEY C
SCALE 2:1

2320931-4
KEY D
SCALE 2:1

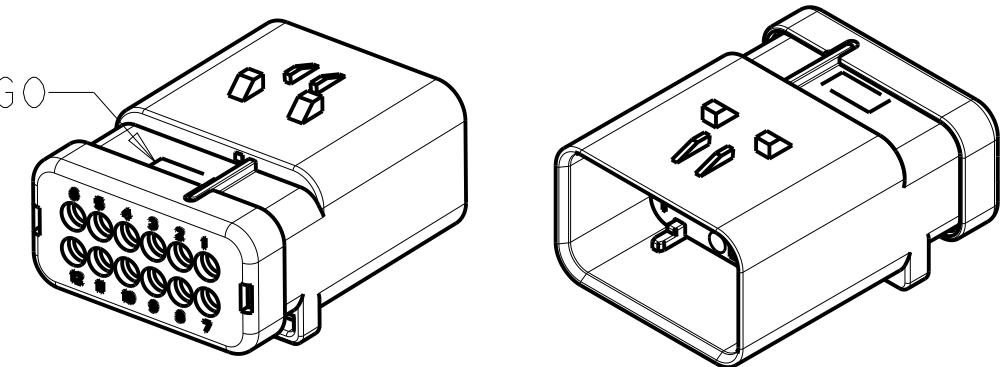


COMPANY LOGO


SCALE 1:1

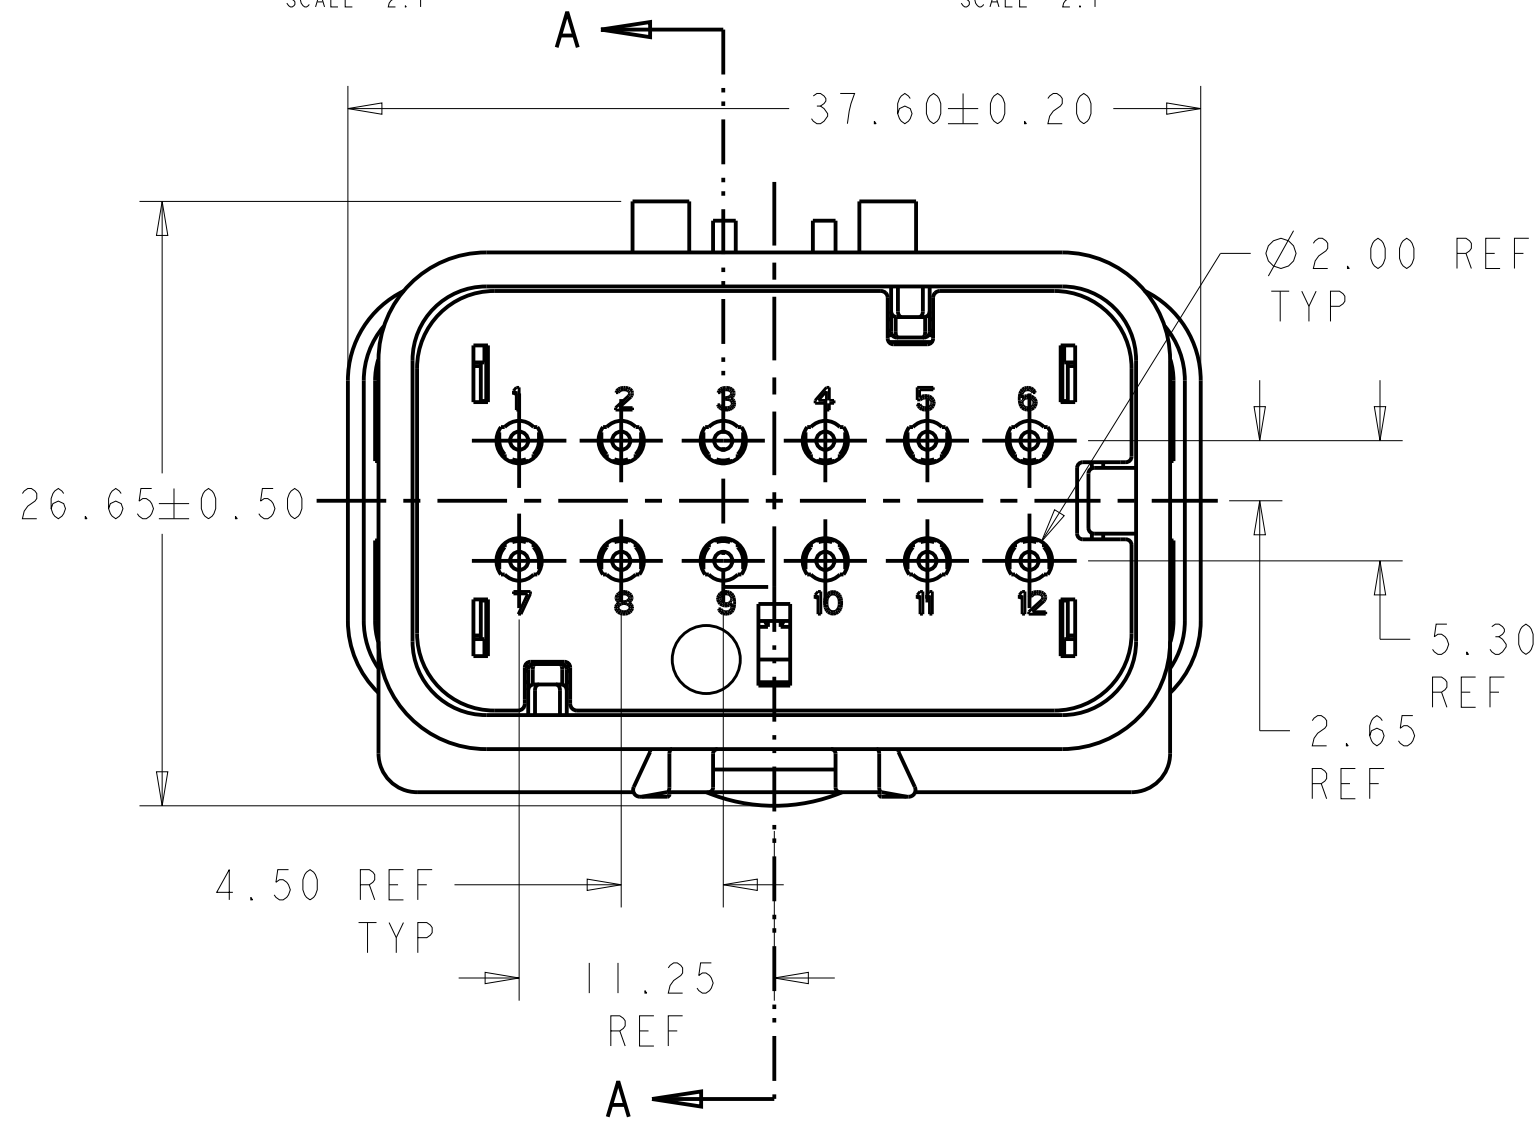

2320931-1 SHOWN
KEY A

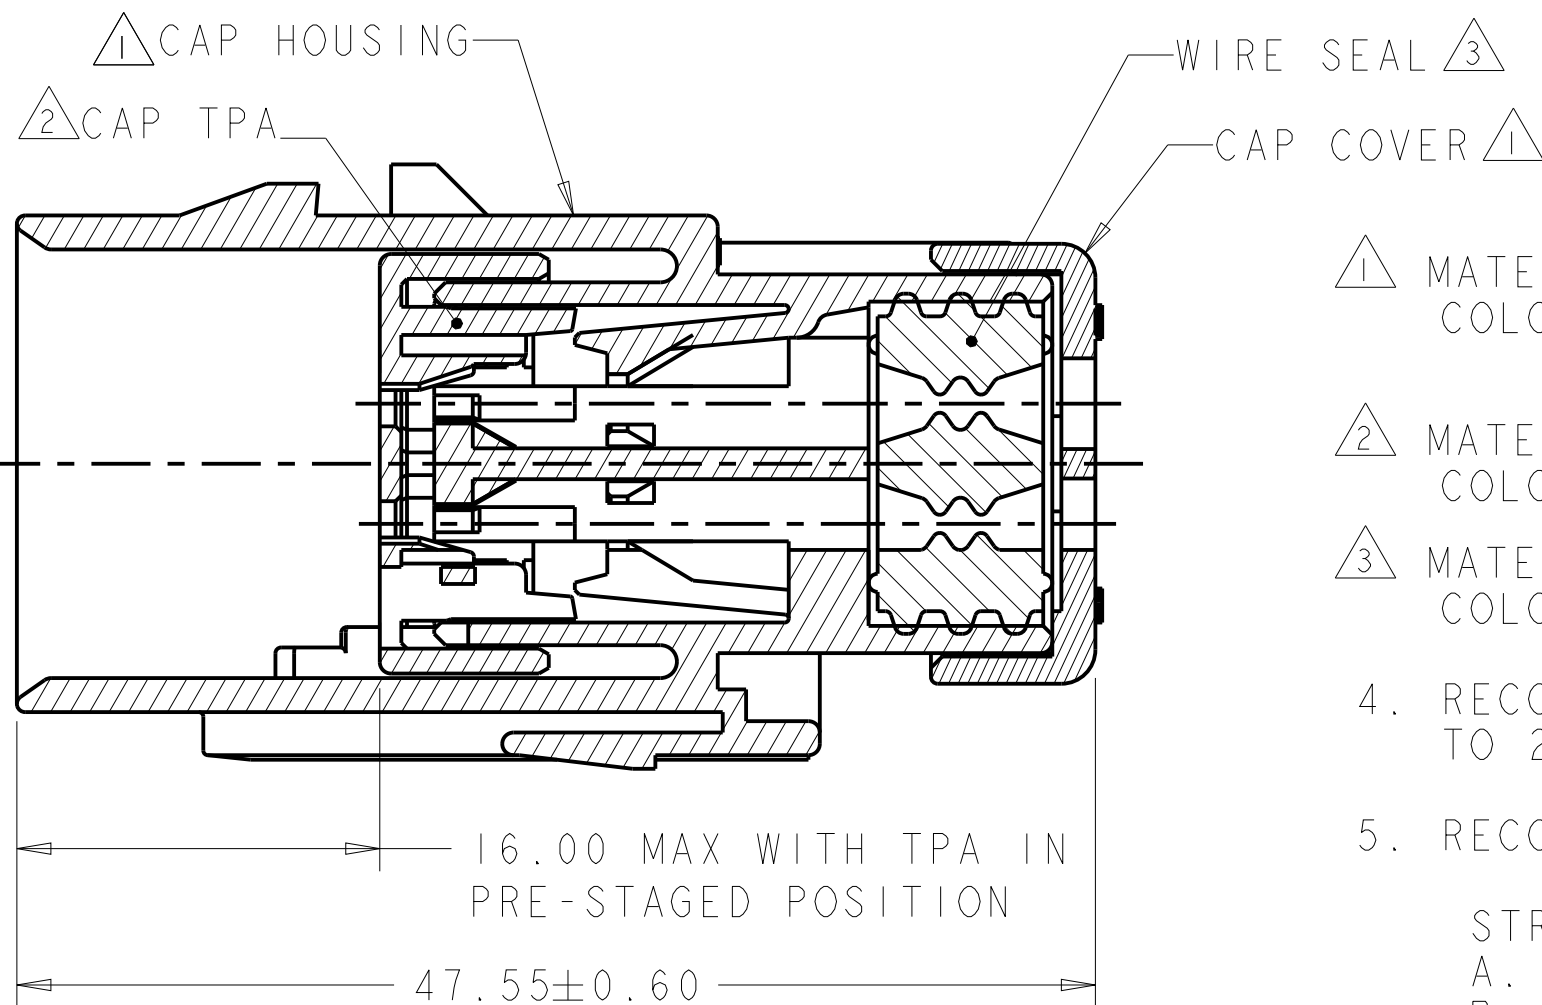

SECTION A-A

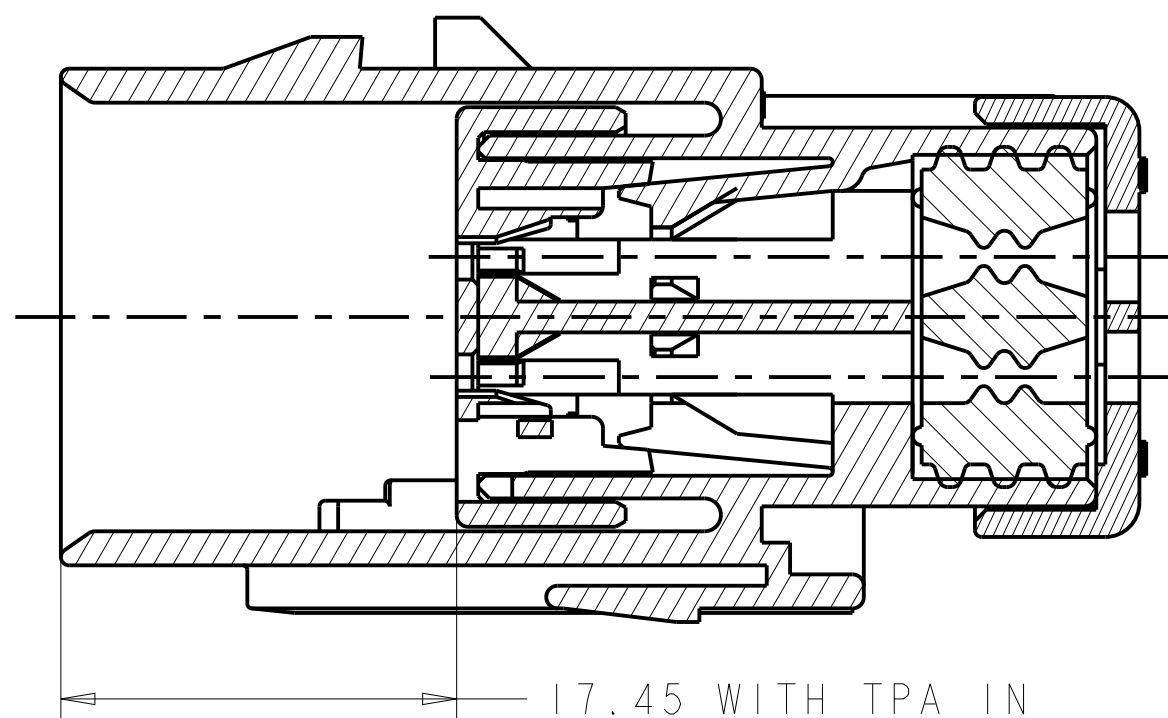

SECTION A-A

1 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: GRAY

2 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: (SEE TABLE)

3 MATERIAL: SILICONE
COLOR: RUST

4. RECOMMENDED WIRE DIAMETER RANGE IS 1.30
TO 2.54mm.

5. RECOMMENDED BACKSHELLS:

STRAIGHT EXIT

- A. 2292865-1 SMOOTH WIRE EXIT
B. 2292865-2 NC20/NWI7 CONDUIT WIRE EXIT
C. 2292865-3 NCI6/NWI3 CONDUIT WIRE EXIT

90° EXIT

- D. 2302486-1 SMOOTH WIRE EXIT
E. 2302486-2 NC20/NWI7 CONDUIT WIRE EXIT
F. 2302486-3 NCI6/NWI3 CONDUIT WIRE EXIT

6. RECOMMENDED SEAL PLUG: 776363-1

7. MATING CONNECTOR: 2320937-X.

D	ORANGE	23209131-4
C	PURPLE	2320931-3
B	BLUE	2320931-2
A	TAN	2320931-1
KEY	TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. MCNEAL 20MAR2018	TE Connectivity			
DIMENSIONS: mm		CHK R. BALTER 20MAR2018				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. BALTER 20MAR2018	NAME CAP ASSEMBLY, 12 POSITION, REDUCED DIA SEAL, HIGH TEMP, AMPSEAL 16			
0 PLC ± 1 PLC ± 2 PLC ±0.30 3 PLC ± 4 PLC ±		PRODUCT SPEC 108-32602	SIZE A2			
MATERIAL -		APPLICATION SPEC 114-32362	CAGE CODE -			
FINISH -		WEIGHT 22.5±1g	DRAWING NO C-2320931			
		CUSTOMER DRAWING	RESTRICTED TO -			
			SCALE 3:1 SHEET 1 OF 1 REV A			