




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE	08APR2021	MK	BC




2320926-2
SCALE 2:1
KEY B



2320926-3
SCALE 2:1
KEY C




2320926-4
SCALE 2:1
KEY D

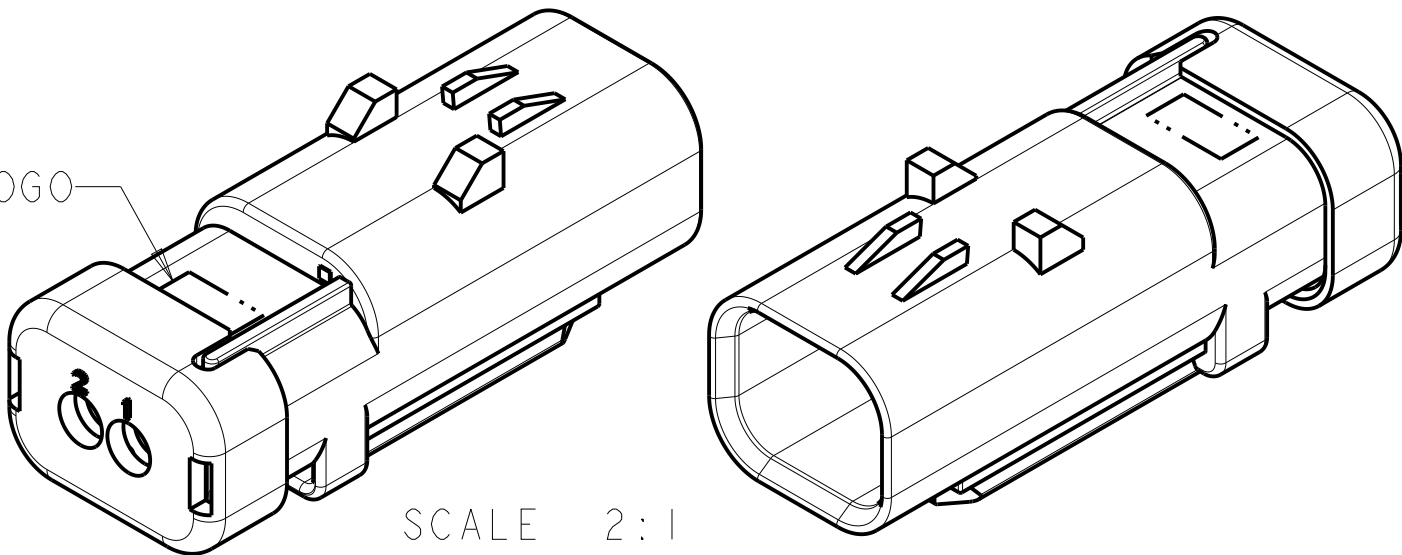


COMPANY LOGO


SCALE 2:1

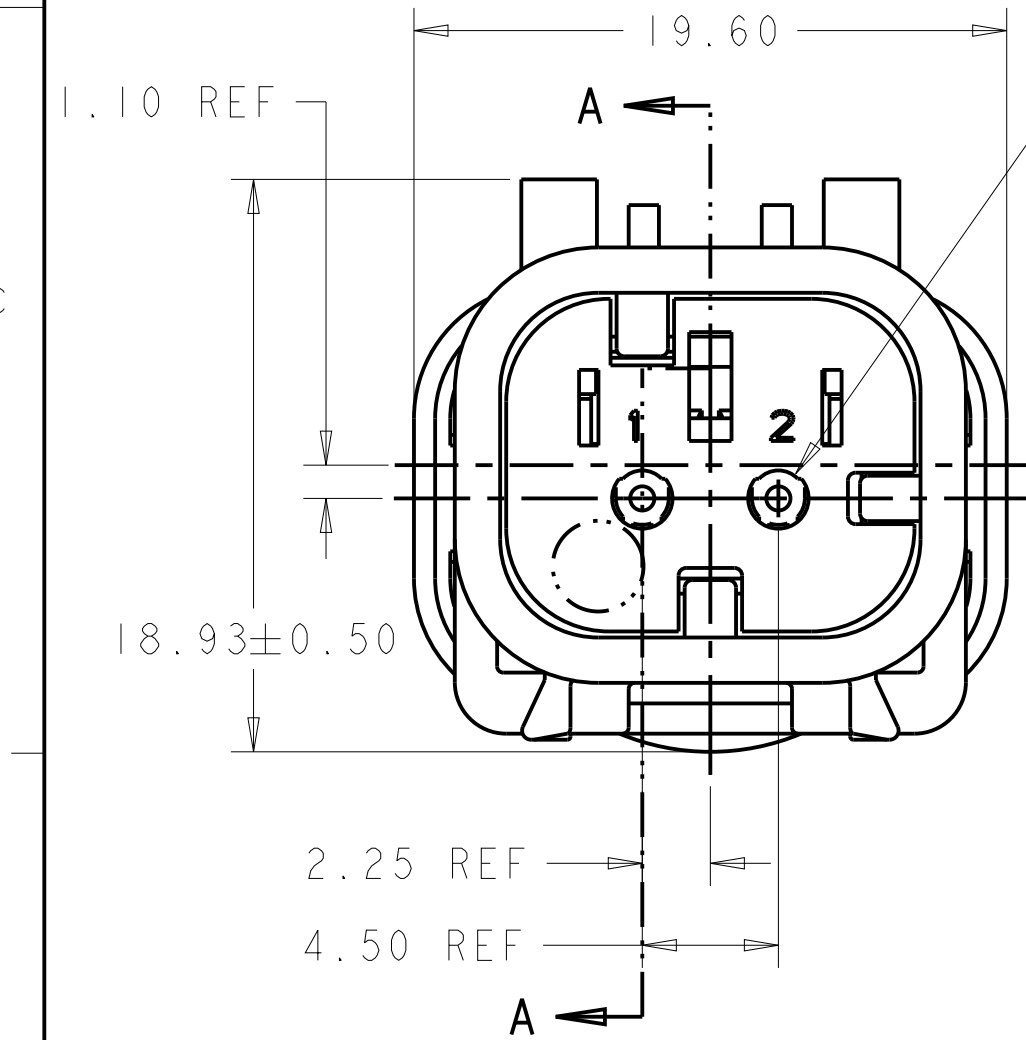

2320926-1 SHOWN
KEY A

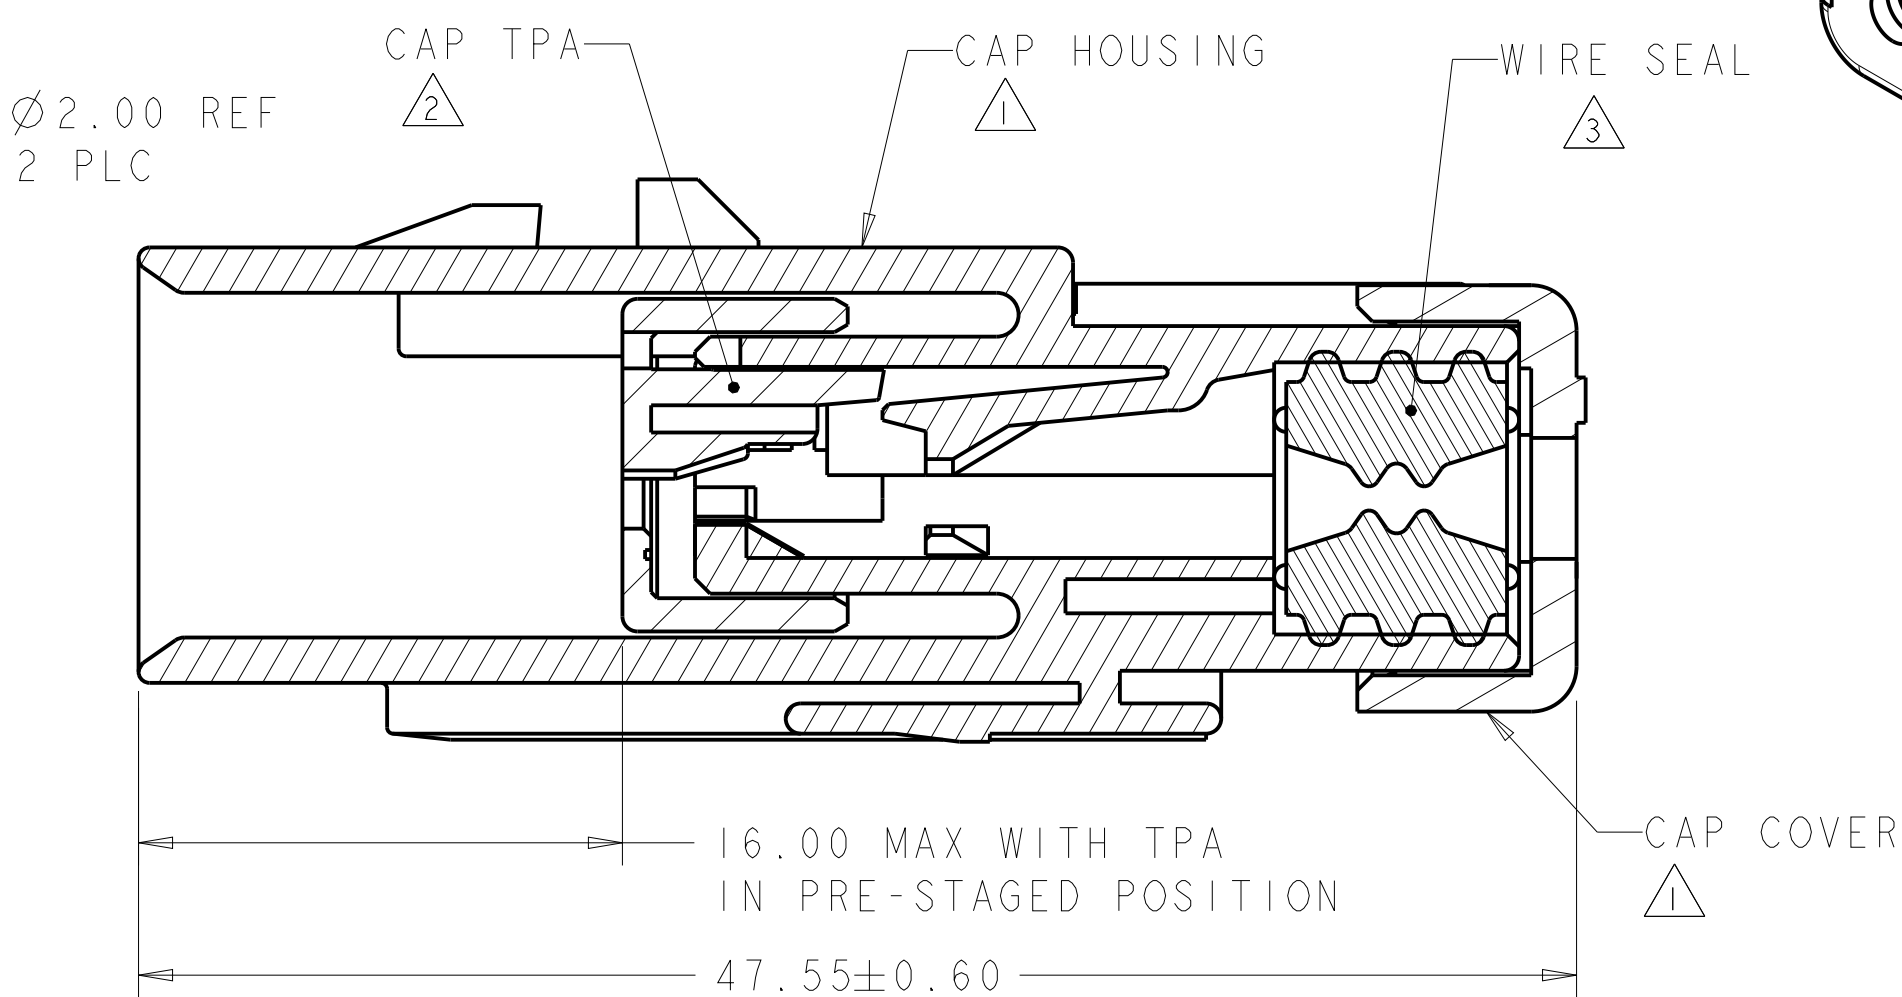

SECTION A-A

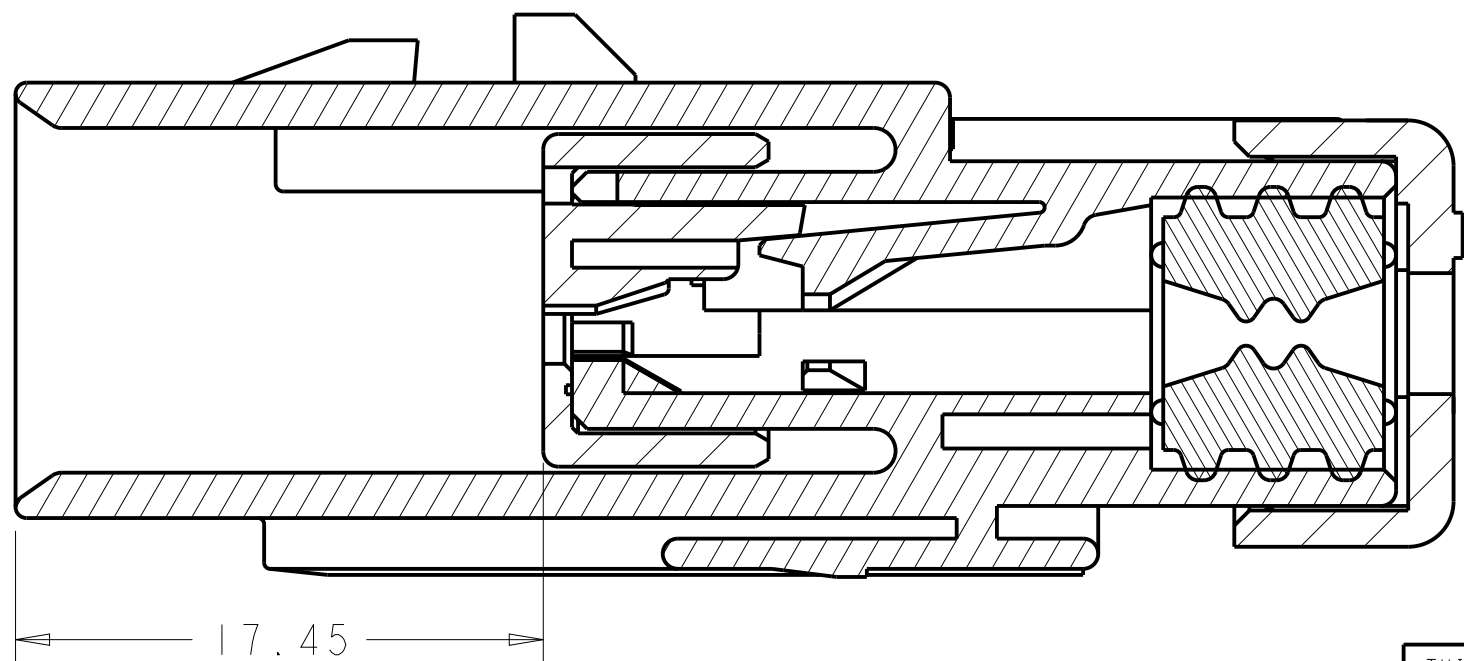

SECTION A-A
WITH TPA IN CLOSED POSITION

- 1 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: GRAY
- 2 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: (SEE TABLE)
- 3 MATERIAL: SILICONE
COLOR: LT GRAY.
4. RECOMMENDED WIRE DIAMETER RANGE IS 1.30 TO 2.54mm.
5. RECOMMENDED BACKSHELLS:
- STRAIGHT EXIT
- A. 2292860-1 SMOOTH WIRE EXIT
- B. 2292860-2 NC12/NW10 CONDUIT WIRE EXIT
- C. 2292860-3 NC08/NW7.5 CONDUIT WIRE EXIT
- 90° EXIT
- D. 2302481-1 SMOOTH WIRE EXIT
- E. 2302481-2 NC12/NW10 CONDUIT WIRE EXIT
- F. 2302481-3 NC08/NW7.5 CONDUIT WIRE EXIT
6. RECOMMENDED SEAL PLUG: 776363-1.
7. MATING CONNECTOR: 2320932-X.

ORANGE	2320926-4
PURPLE	2320926-3
BLUE	2320926-2
TAN	2320926-1
TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. MCNEAL 09OCT2017	TE Connectivity			
DIMENSIONS: mm		CHK R. BALTER 09OCT2017				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. BALTER 09OCT2017	NAME			
0 PLC ±		PRODUCT SPEC	CAP ASSEMBLY, 2 POSITION, REDUCED DIA SEAL, HIGH TEMP, AMPSEAL 16			
1 PLC ±		108-32602				
2 PLC ±0.30		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO			
3 PLC ±		114-32362	A200779C-2320926			
4 PLC ±		WEIGHT 9g	RESTRICTED TO			
ANGLES ±		CUSTOMER DRAWING	SCALE 4:1 SHEET OF REV A			
FINISH						