


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE	08APR2021	MK	BC

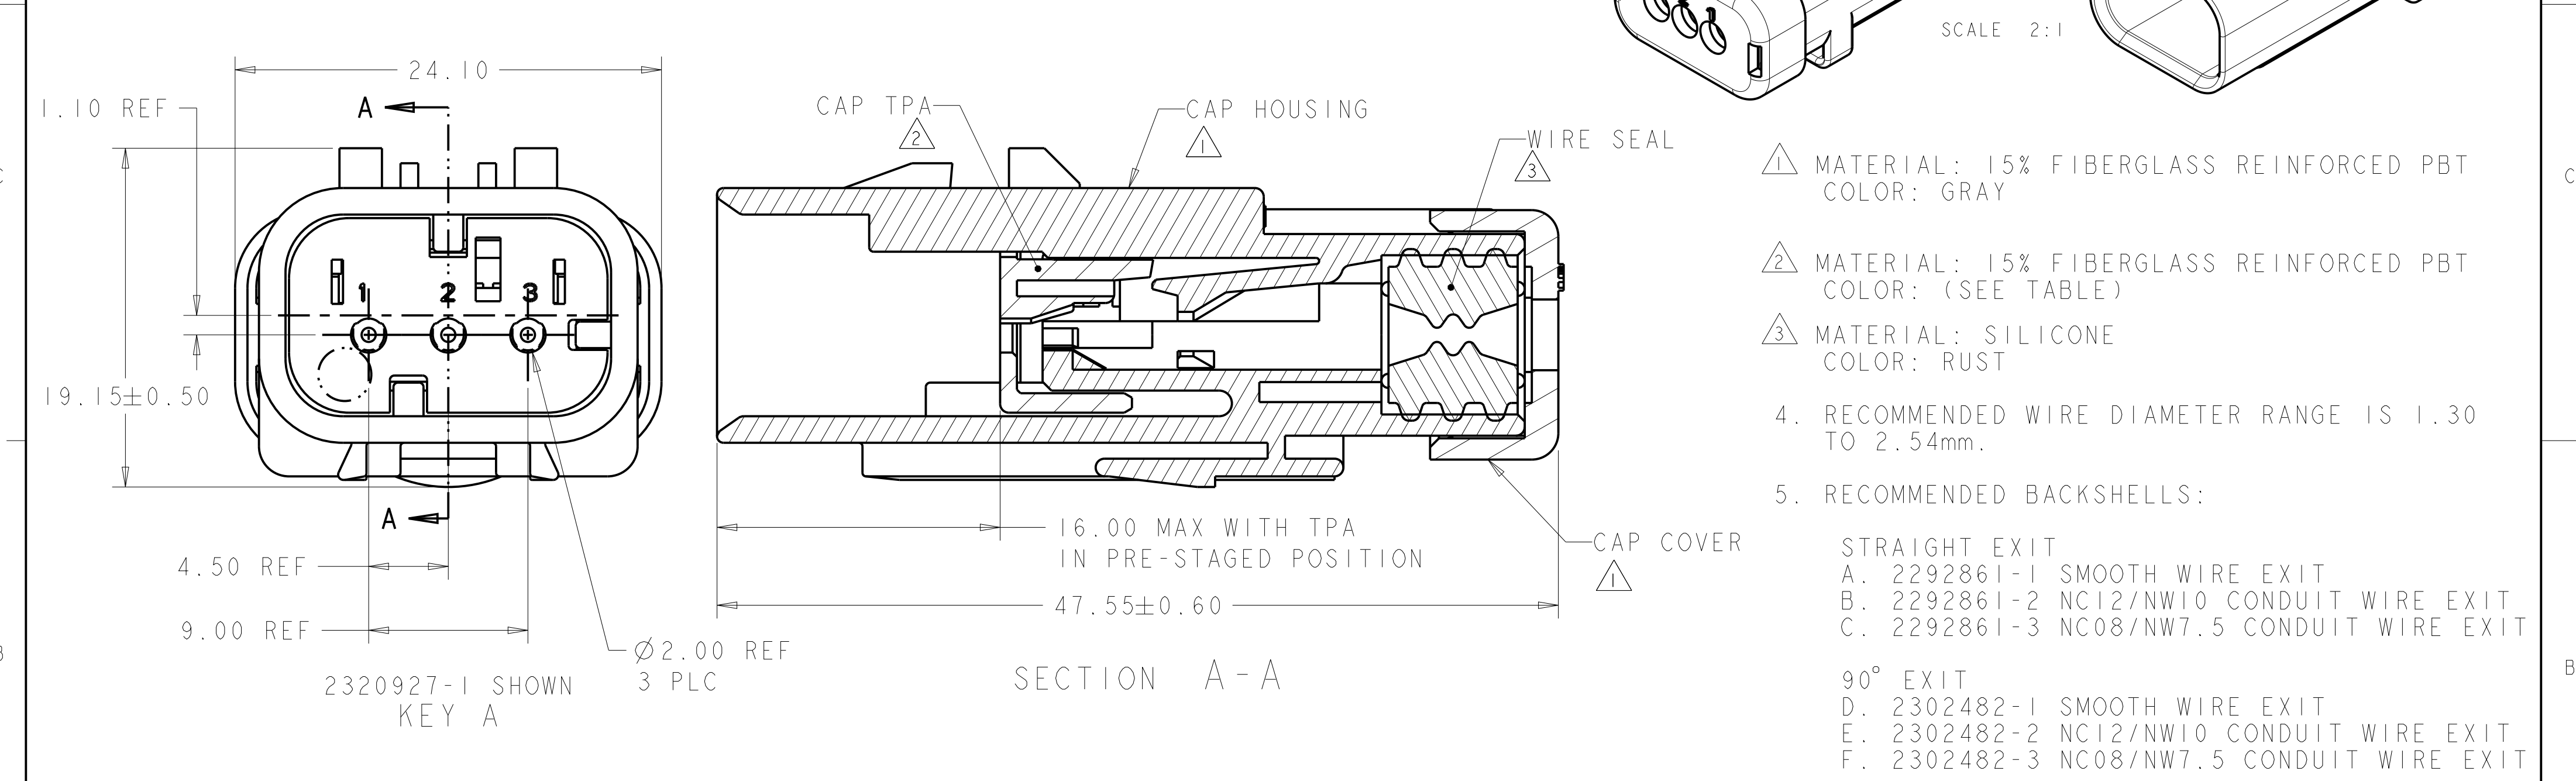

- 1 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: GRAY
- 2 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: (SEE TABLE)
- 3 MATERIAL: SILICONE
COLOR: RUST
4. RECOMMENDED WIRE DIAMETER RANGE IS 1.30
TO 2.54mm.
5. RECOMMENDED BACKSHELLS:

STRAIGHT EXIT
A. 2292861-1 SMOOTH WIRE EXIT
B. 2292861-2 NC12/NW10 CONDUIT WIRE EXIT
C. 2292861-3 NC08/NW7.5 CONDUIT WIRE EXIT

90° EXIT
D. 2302482-1 SMOOTH WIRE EXIT
E. 2302482-2 NC12/NW10 CONDUIT WIRE EXIT
F. 2302482-3 NC08/NW7.5 CONDUIT WIRE EXIT
6. RECOMMENDED SEAL PLUG: 776363-1
7. MATING CONNECTOR: 2320933-X.

	D	ORANGE	2320927-4
	C	PURPLE	2320927-3
	B	BLUE	2320927-2
	A	TAN	2320927-1
KEY	TPA COLOR	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±0.30
3 PLC ±
4 PLC ±
ANGLES ±
FINISH

DWN J MCNEAL 08NOV2017
CHK R BALTER 08NOV2017
APVD R BALTER 08NOV2017

PRODUCT SPEC
108-32602
APPLICATION SPEC
114-32362
WEIGHT 10g

CUSTOMER DRAWING

TE Connectivity

NAME
CAP ASSEMBLY, 3 POSITION,
REDUCED DIA SEAL, HIGH TEMP,
AMPSEAL 16

SIZE CAGE CODE DRAWING NO
A200779C-2320927

RESTRICTED TO
-
SCALE 4:1 SHEET OF REV A