


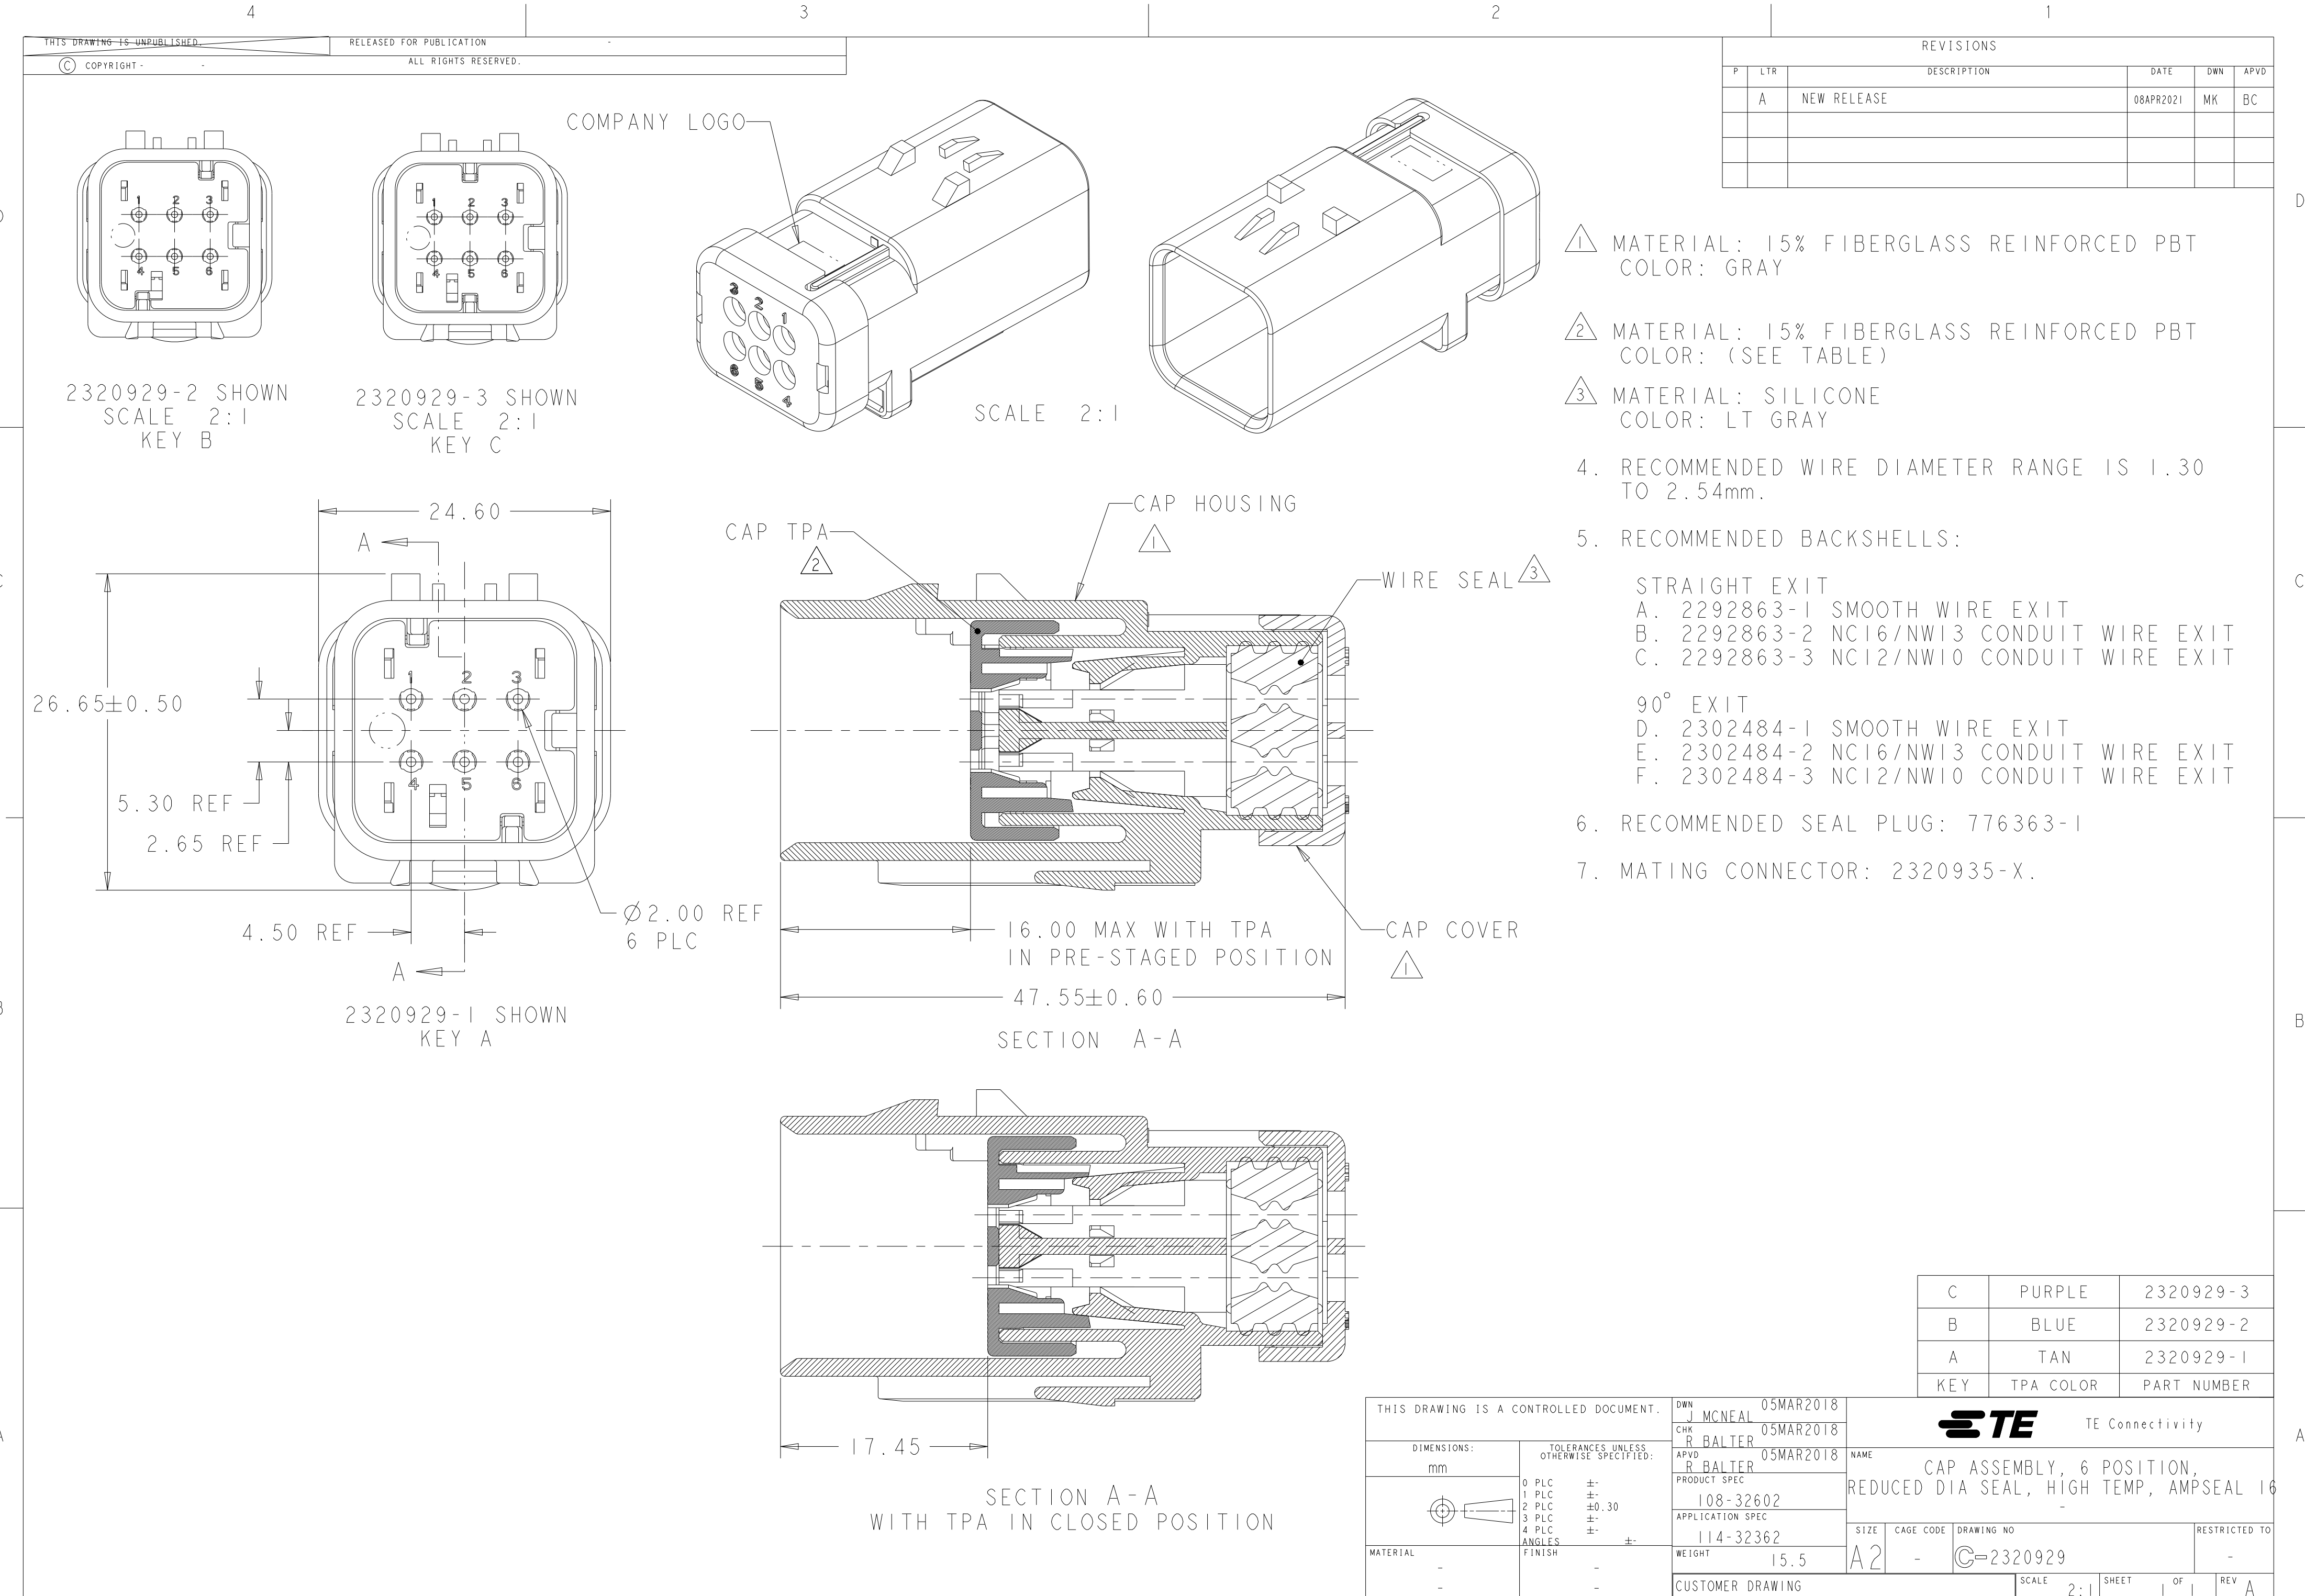

THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		1	
COPYRIGHT -		ALL RIGHTS RESERVED.		REVISIONS	
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE	08APR2021	MK	BC

1 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: GRAY

2 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: (SEE TABLE)

3 MATERIAL: SILICONE
COLOR: LT GRAY

4. RECOMMENDED WIRE DIAMETER RANGE IS 1.30 TO 2.54mm.

5. RECOMMENDED BACKSHELLS:

STRAIGHT EXIT
A. 2292863-1 SMOOTH WIRE EXIT
B. 2292863-2 NC16/NW13 CONDUIT WIRE EXIT
C. 2292863-3 NC12/NW10 CONDUIT WIRE EXIT

90° EXIT
D. 2302484-1 SMOOTH WIRE EXIT
E. 2302484-2 NC16/NW13 CONDUIT WIRE EXIT
F. 2302484-3 NC12/NW10 CONDUIT WIRE EXIT

6. RECOMMENDED SEAL PLUG: 776363-1

7. MATING CONNECTOR: 2320935-X.

C	PURPLE	2320929-3
B	BLUE	2320929-2
A	TAN	2320929-1
KEY	TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

MATERIAL

-

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±-

1 PLC ±-

2 PLC ±0.30

3 PLC ±-

4 PLC ±-

ANGLES ±-

FINISH -

-

DWN

J MCNEAL

05MAR2018

CHK

R BALTER

05MAR2018

APVD

R BALTER

05MAR2018

PRODUCT SPEC

108-32602

APPLICATION SPEC

114-32362

WEIGHT

15.5

CUSTOMER DRAWING

NAME

CAP ASSEMBLY, 6 POSITION, REDUCED DIA SEAL, HIGH TEMP, AMPSEAL 16

SIZE

A2

CAGE CODE

-

DRAWING NO

C-2320929

RESTRICTED TO

-

SCALE

2:1

SHEET

1

OF

1

REV

A