




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE	08APR2021	MK	BC

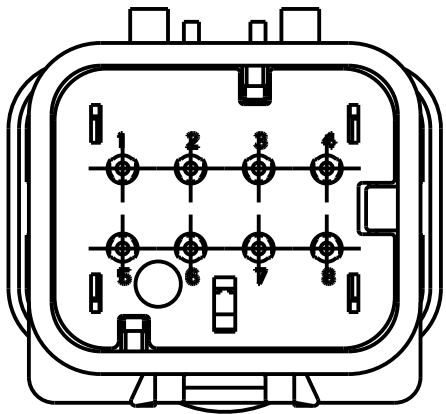


2320930-2
SCALE 2:1
KEY B

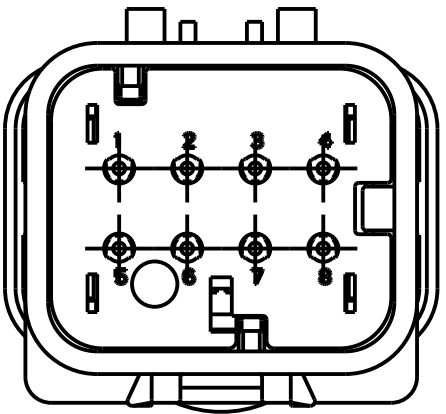


2320930-3
SCALE 2:1
KEY C

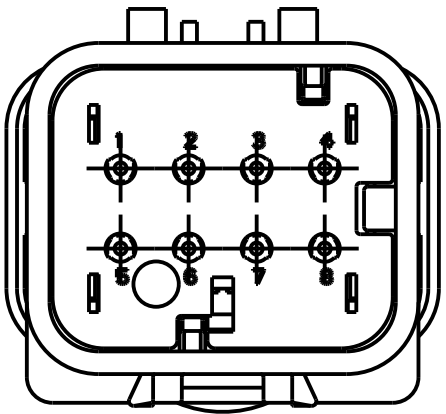


2320930-4
SCALE 2:1
KEY D

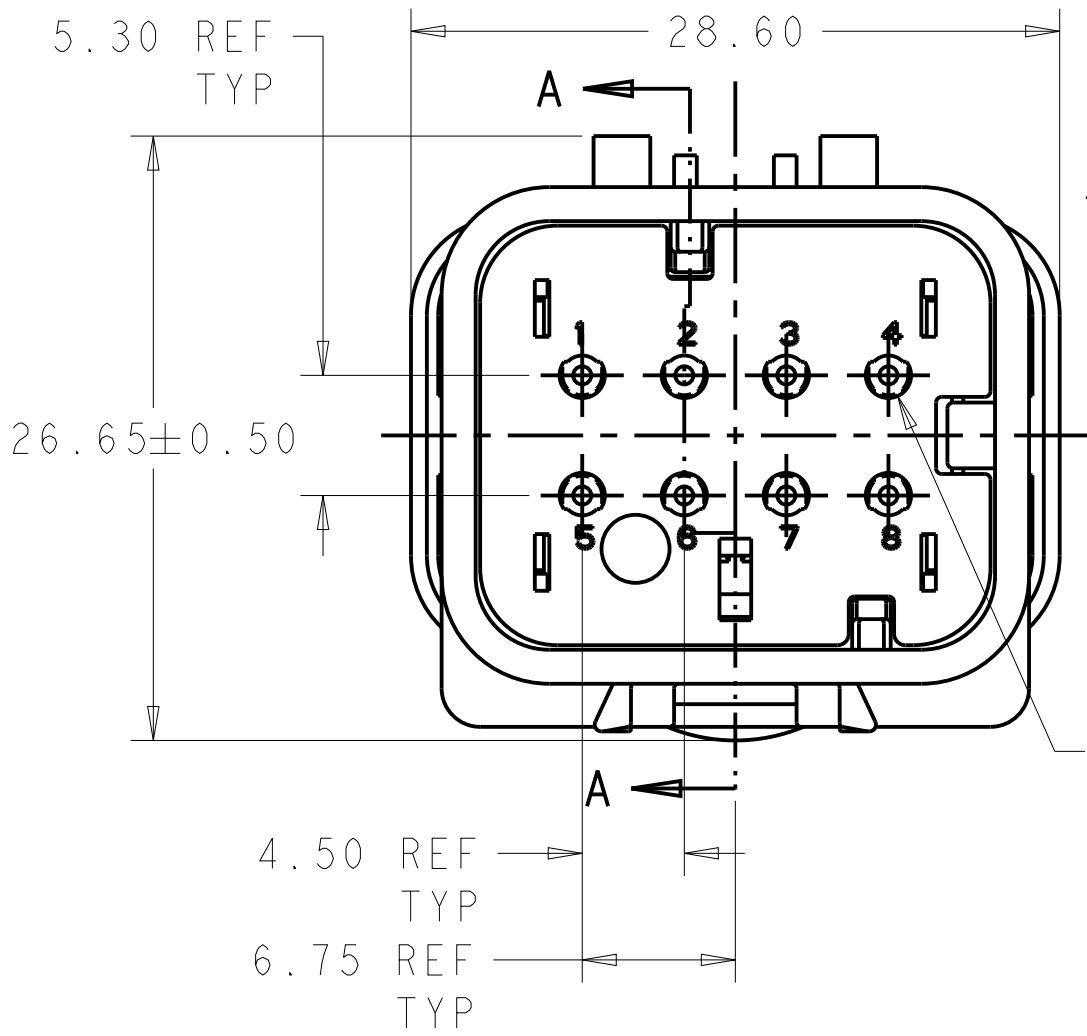

2320930-1 SHOWN
KEY A

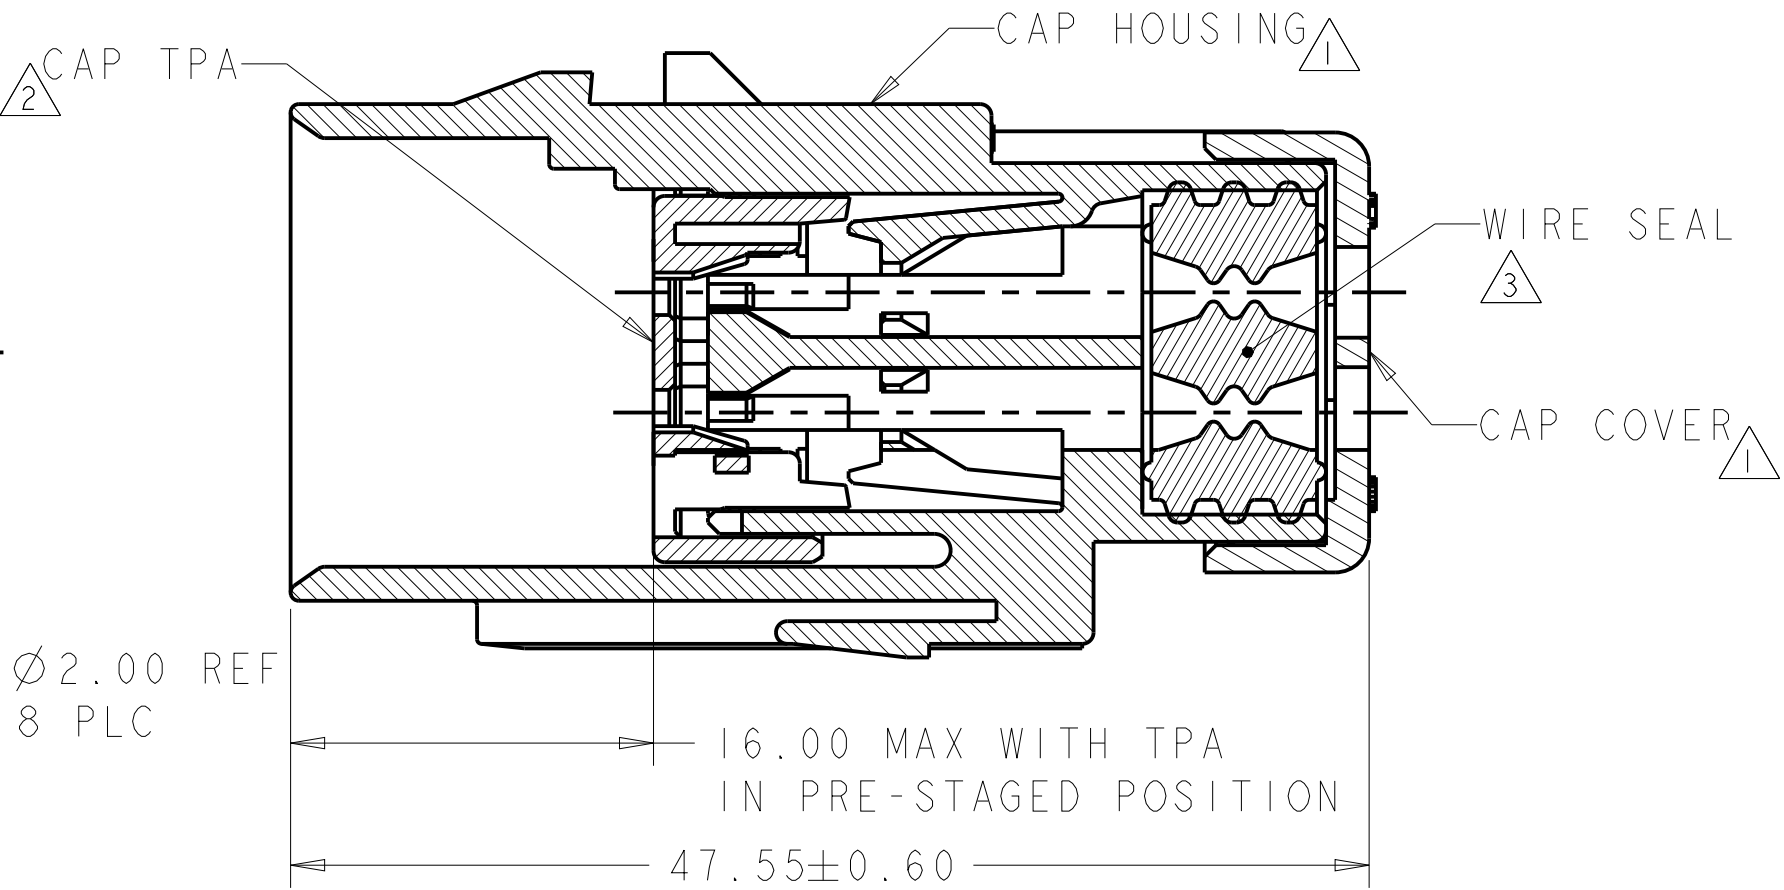

SECTION A-A

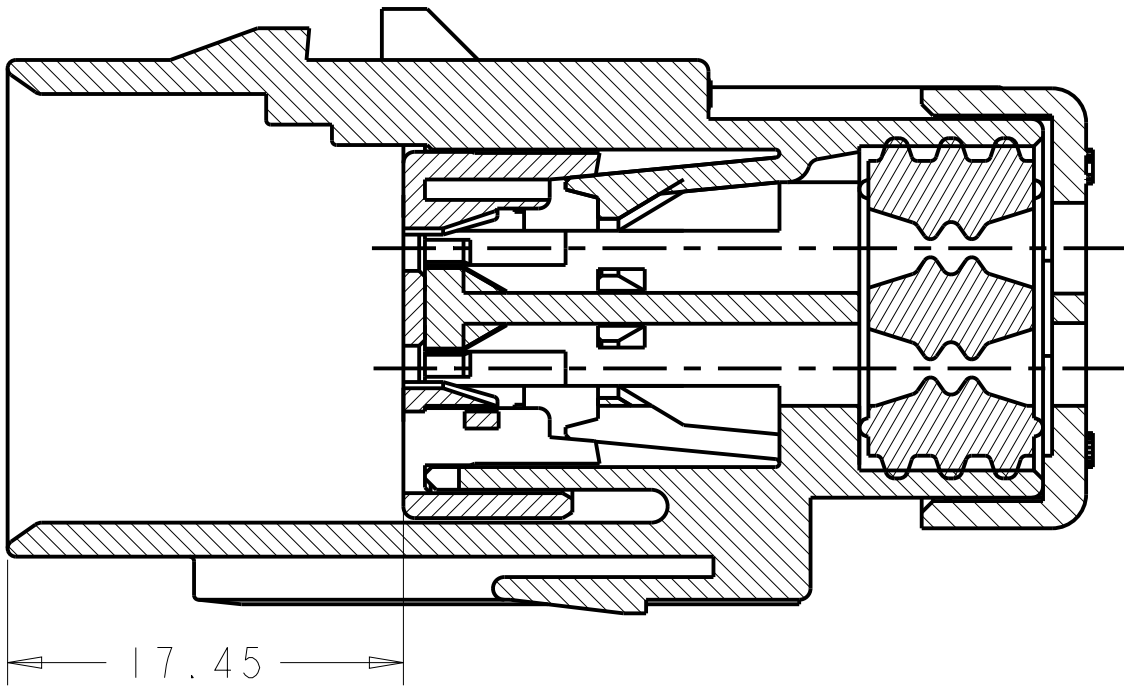

SECTION A-A
WITH TPA IN CLOSED POSITION

1 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: GRAY

2 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: (SEE TABLE)

3 MATERIAL: SILICONE
COLOR: RUST

4. RECOMMENDED WIRE DIAMETER RANGE IS 1.30
TO 2.54mm.


5. RECOMMENDED BACKSHELLS:

STRAIGHT EXIT
A. 2292864-1 SMOOTH WIRE EXIT
B. 2292864-2 NC20/NWI7 CONDUIT WIRE EXIT
C. 2292864-3 NCI6/NWI3 CONDUIT WIRE EXIT

90° EXIT
D. 2302485-1 SMOOTH WIRE EXIT
E. 2302485-2 NC20/NWI7 CONDUIT WIRE EXIT
F. 2302485-3 NCI6/NWI3 CONDUIT WIRE EXIT

6. RECOMMENDED SEAL PLUG: 776363-1

7. MATING CONNECTOR: 2320936-X.

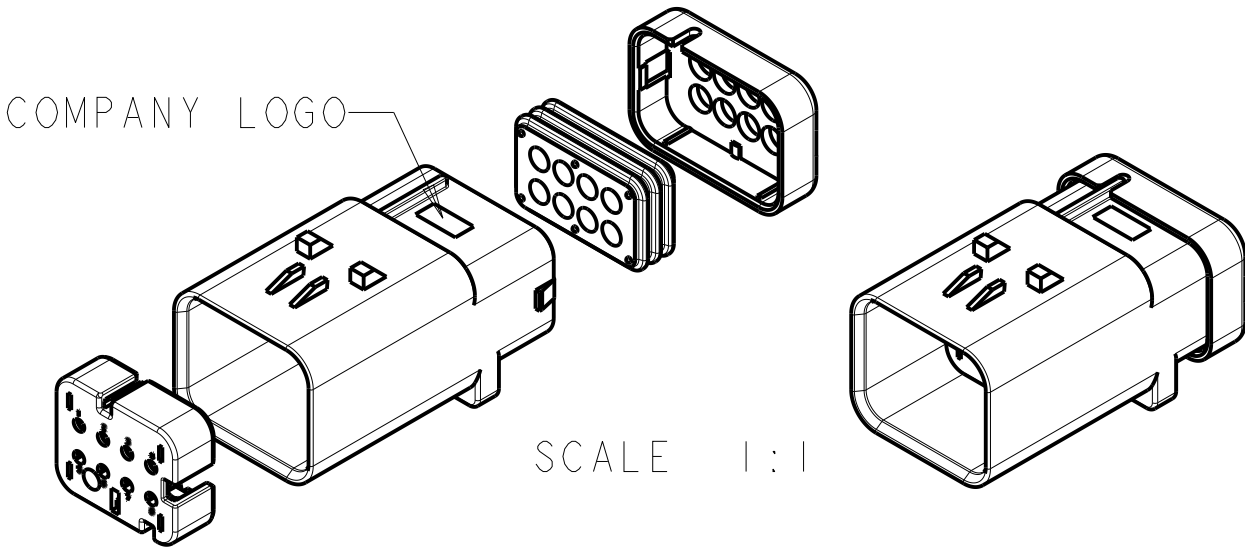

D	ORANGE	2320930-4
C	PURPLE	2320930-3
B	BLUE	2320930-2
A	TAN	2320930-1
KEY	TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. MCNEAL 18SEP2018	TE Connectivity			
DIMENSIONS: mm		CHK R. BALTER 18SEP2018				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. BALTER 18SEP2018	NAME CAP ASSEMBLY, 8 POSN, REDUCED DIA SEAL, HI TEMP, AMPSEAL 16			
0 PLC ± 1 PLC ± 2 PLC ±0.30 3 PLC ± 4 PLC ± ANGLES ± FINISH		PRODUCT SPEC 108-32602 APPLICATION SPEC 114-32362 WEIGHT 17.5±1g	SIZE A2	CAGE CODE -	DRAWING NO C-2320930	RESTRICTED TO -
MATERIAL -		CUSTOMER DRAWING		SCALE 2:1	SHEET OF	REV A