



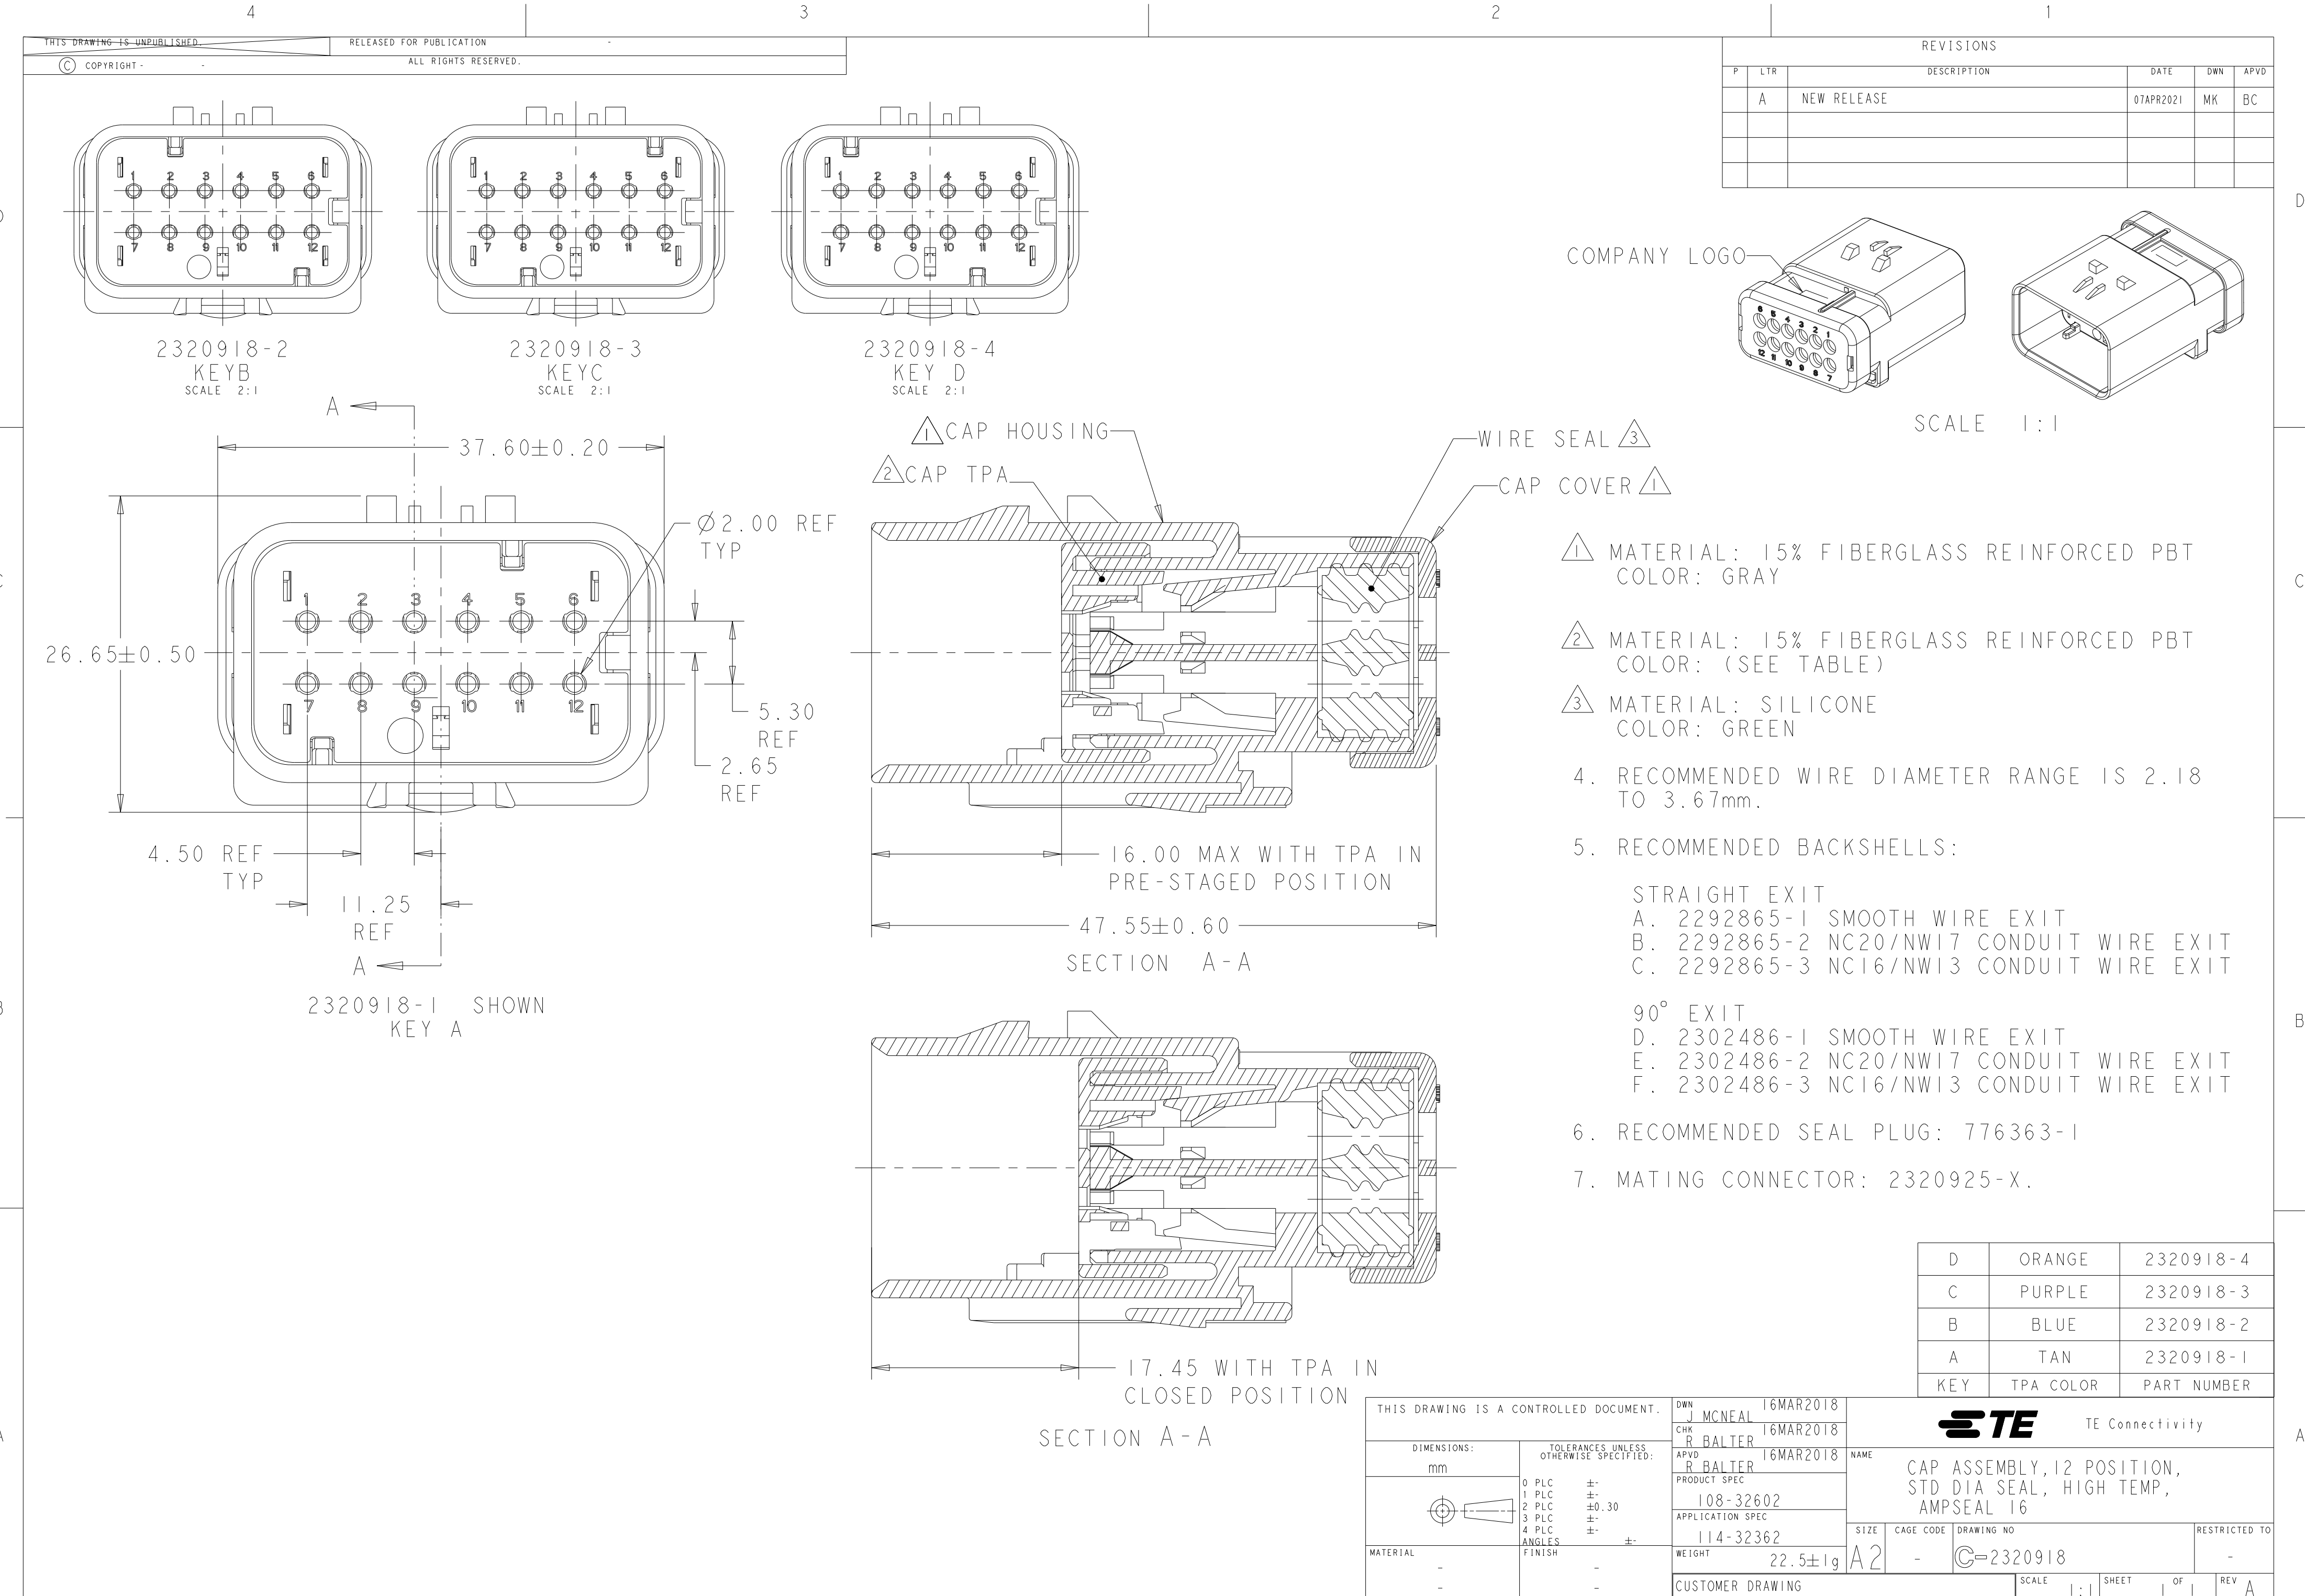

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE	07APR2021	MK	BC

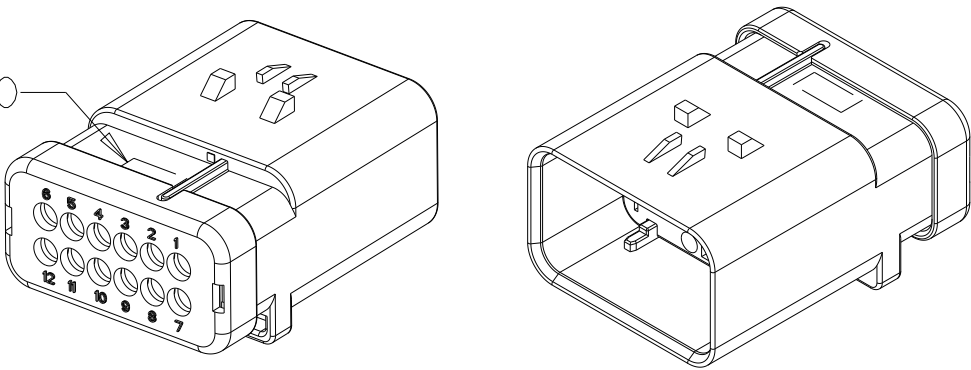

COMPANY LOGO

SCALE 1:1

1 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: GRAY

2 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: (SEE TABLE)

3 MATERIAL: SILICONE
COLOR: GREEN

4. RECOMMENDED WIRE DIAMETER RANGE IS 2.18 TO 3.67mm.

5. RECOMMENDED BACKSHELLS:

- STRAIGHT EXIT
A. 2292865-1 SMOOTH WIRE EXIT
B. 2292865-2 NC20/NWI7 CONDUIT WIRE EXIT
C. 2292865-3 NC16/NWI3 CONDUIT WIRE EXIT

- 90° EXIT
D. 2302486-1 SMOOTH WIRE EXIT
E. 2302486-2 NC20/NWI7 CONDUIT WIRE EXIT
F. 2302486-3 NC16/NWI3 CONDUIT WIRE EXIT

6. RECOMMENDED SEAL PLUG: 776363-1

7. MATING CONNECTOR: 2320925-X.

D	ORANGE	2320918-4
C	PURPLE	2320918-3
B	BLUE	2320918-2
A	TAN	2320918-1
KEY	TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J MCNEAL 16MAR2018	TE Connectivity			
DIMENSIONS: mm		CHK R BALTER 16MAR2018				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R BALTER 16MAR2018	NAME			
0 PLC ±		PRODUCT SPEC	CAP ASSEMBLY, 12 POSITION, STD DIA SEAL, HIGH TEMP, AMPSEAL 16			
1 PLC ±		108-32602	SIZE			
2 PLC ±0.30		APPLICATION SPEC	CAGE CODE			
3 PLC ±		114-32362	DRAWING NO			
4 PLC ±		WEIGHT	RESTRICTED TO			
ANGLES ±		22.5±1g	-			
FINISH		CUSTOMER DRAWING	SCALE 1:1			
-			SHEET 1 OF 1			
-			REV A			