




D

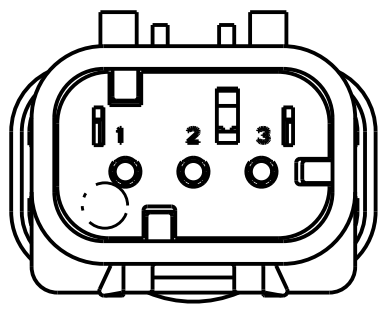

2320914-2
SCALE 2:1
KEY B

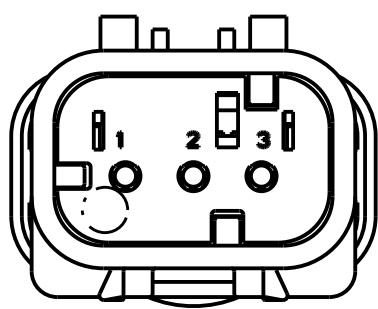


2320914-3
SCALE 2:1
KEY C

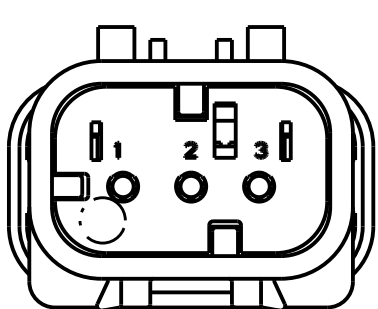


2320914-4
SCALE 2:1
KEY D


COMPANY LOGO

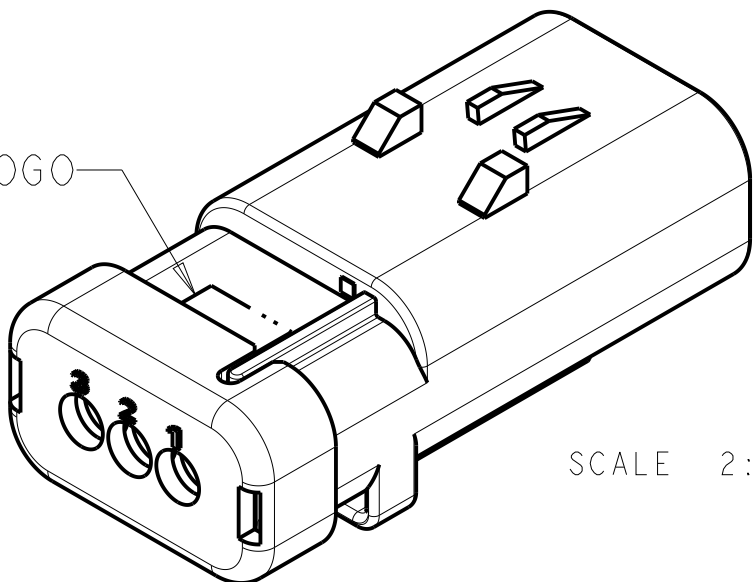


SCALE 2:1

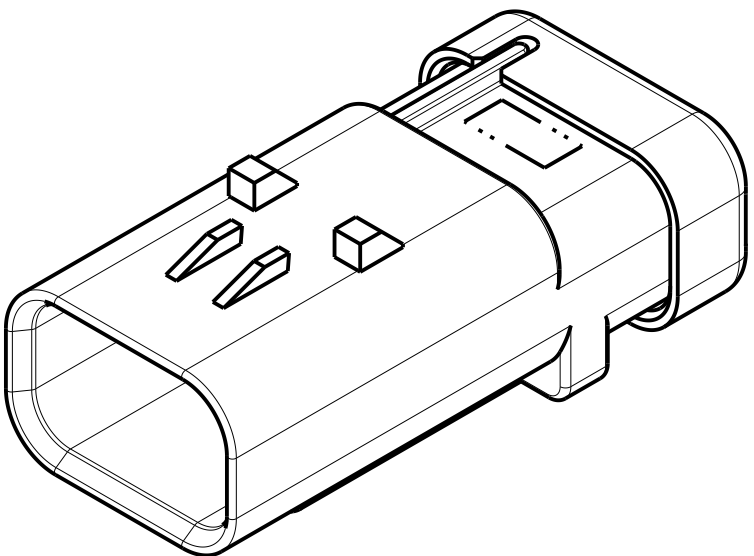

C

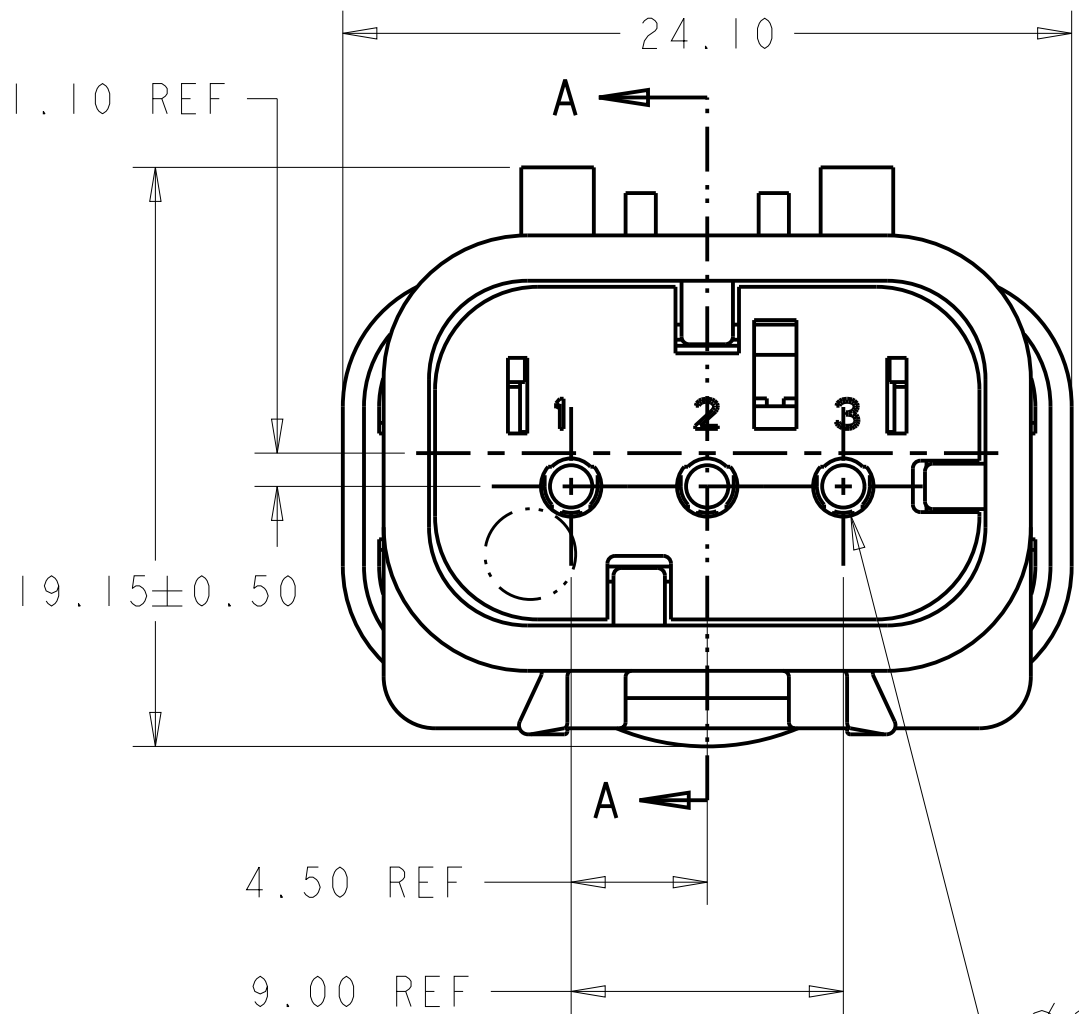


2320914-1 SHOWN
KEY A

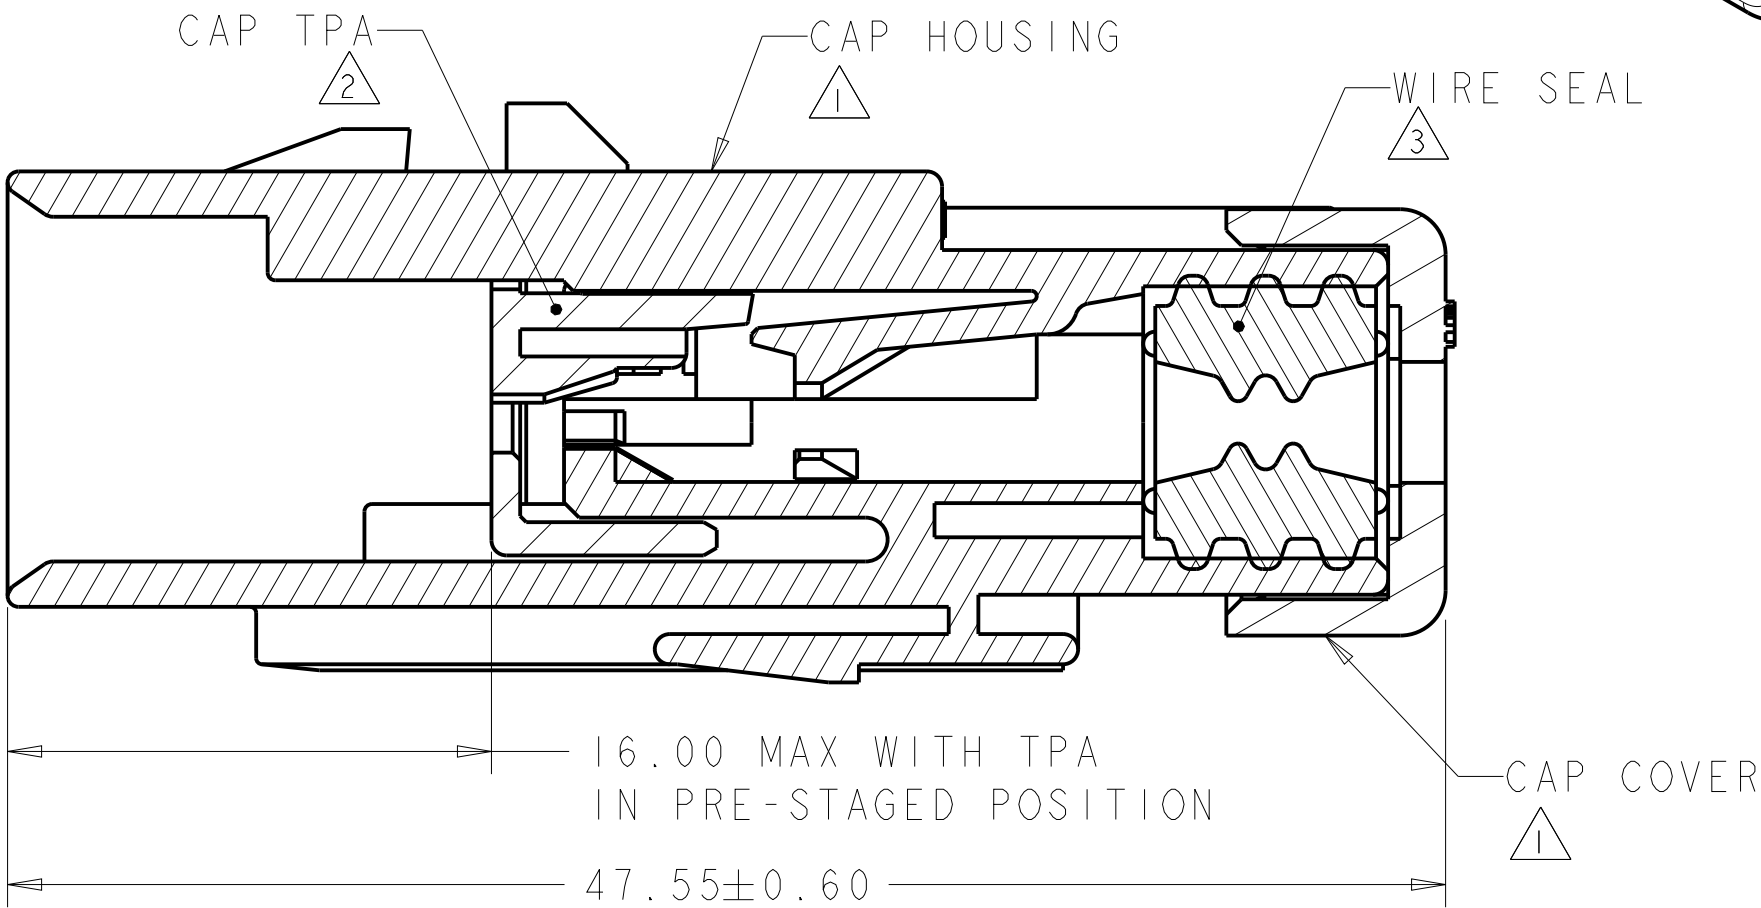

SECTION A-A

B

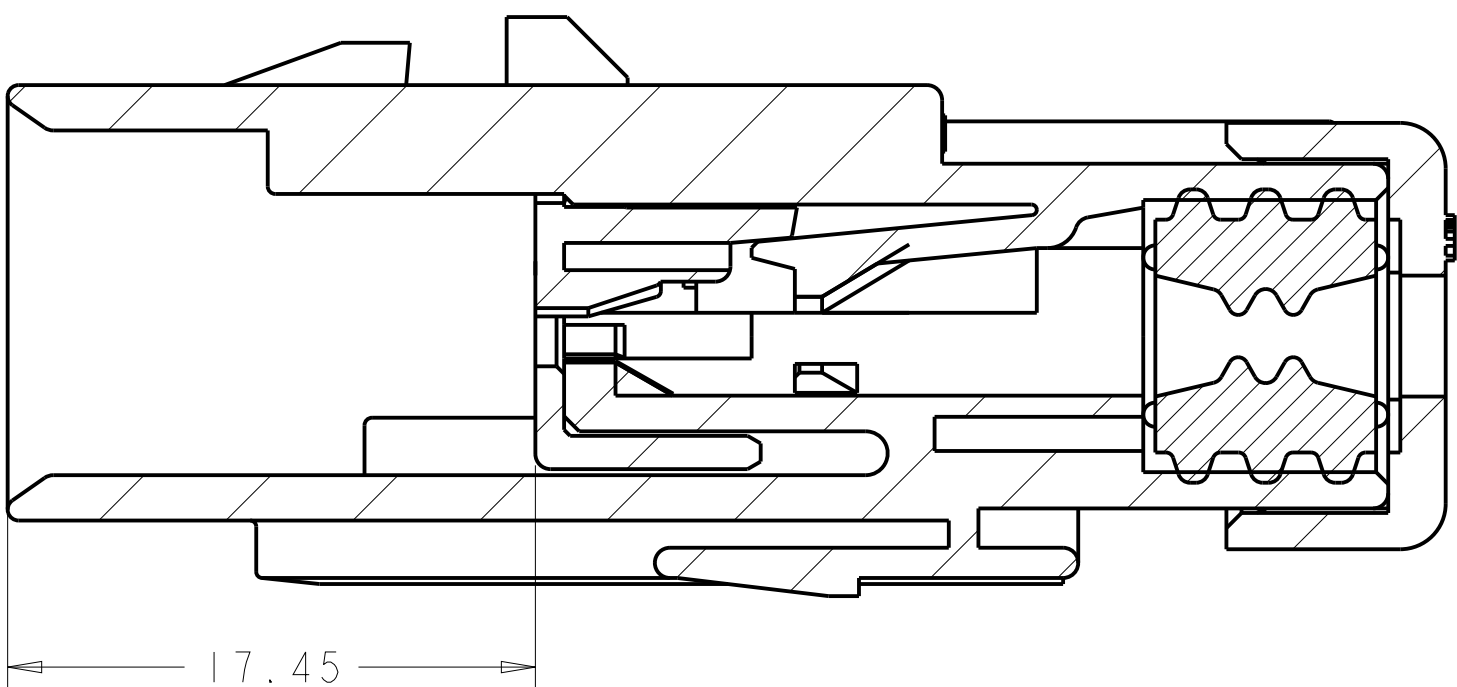

SECTION A-A
WITH TPA IN CLOSED POSITION

- 1 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: GRAY
- 2 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: (SEE TABLE)
- 3 MATERIAL: SILICONE
COLOR: GREEN
4. RECOMMENDED WIRE DIAMETER RANGE IS 2.18
TO 3.67mm.
5. RECOMMENDED BACKSHELLS:
- STRAIGHT EXIT
A. 2292861-1 SMOOTH WIRE EXIT
B. 2292861-2 NC12/NW10 CONDUIT WIRE EXIT
C. 2292861-3 NC08/NW7.5 CONDUIT WIRE EXIT
- 90° EXIT
D. 2302482-1 SMOOTH WIRE EXIT
E. 2302482-2 NC12/NW10 CONDUIT WIRE EXIT
F. 2302482-3 NC08/NW7.5 CONDUIT WIRE EXIT
6. RECOMMENDED SEAL PLUG: 776363-1
7. MATING CONNECTOR: 2320921-X.

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. MCNEAL 08NOV2017	TE Connectivity		
DIMENSIONS: mm		CHK R. BALTER 08NOV2017			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.30 3 PLC ± 4 PLC ± ANGLES ± FINISH		APVD R. BALTER 08NOV2017	NAME CAP ASSEMBLY, 3 POSITION, STD DIA SEAL, HIGH TEMP, AMPSEAL 16		
MATERIAL		PRODUCT SPEC 108-32602	SIZE A200779	CAGE CODE C-2320914	RESTRICTED TO
		APPLICATION SPEC 114-32362	DRAWING NO		
		WEIGHT 10g	SCALE 4:1	SHEET OF	REV A
		CUSTOMER DRAWING			