




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE	07APR2021	MK	BC

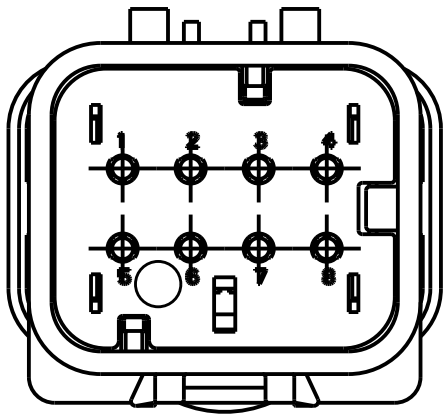

2320917-2
SCALE 2:1
KEY B

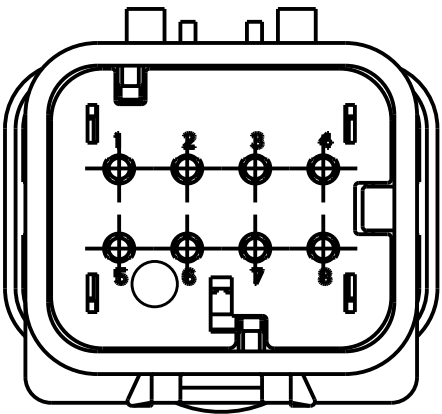

2320917-3
SCALE 2:1
KEY C

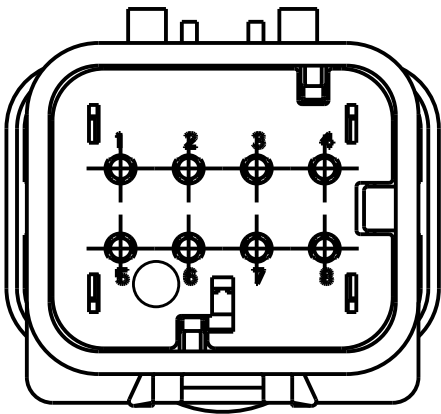

2320917-4
SCALE 2:1
KEY D

1 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: GRAY

2 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: (SEE TABLE)

3 MATERIAL: SILICONE
COLOR: GREEN

4. RECOMMENDED WIRE DIAMETER RANGE IS 2.18 TO 3.67mm.


5. RECOMMENDED BACKSHELLS:

STRAIGHT EXIT
A. 2292864-1 SMOOTH WIRE EXIT
B. 2292864-2 NC20/NWI7 CONDUIT WIRE EXIT
C. 2292864-3 NCI6/NWI3 CONDUIT WIRE EXIT



90° EXIT
D. 2302485-1 SMOOTH WIRE EXIT
E. 2302485-2 NC20/NWI7 CONDUIT WIRE EXIT
F. 2302485-3 NCI6/NWI3 CONDUIT WIRE EXIT

6. RECOMMENDED SEAL PLUG: 776363-1


7. MATING CONNECTOR: 2320924-X.

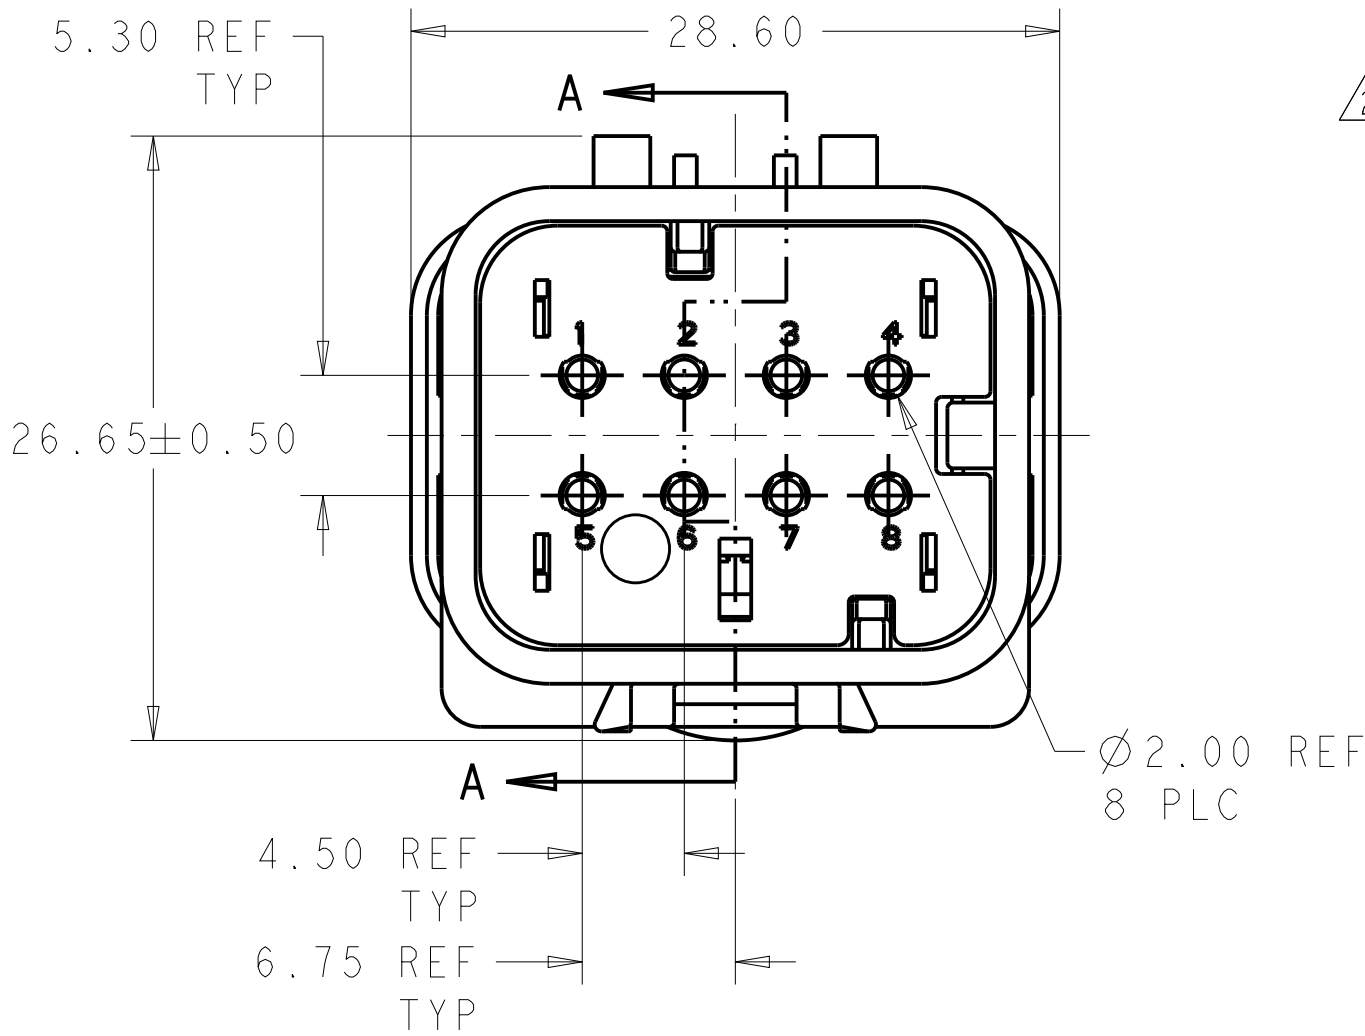

2320917-1 SHOWN
KEY A

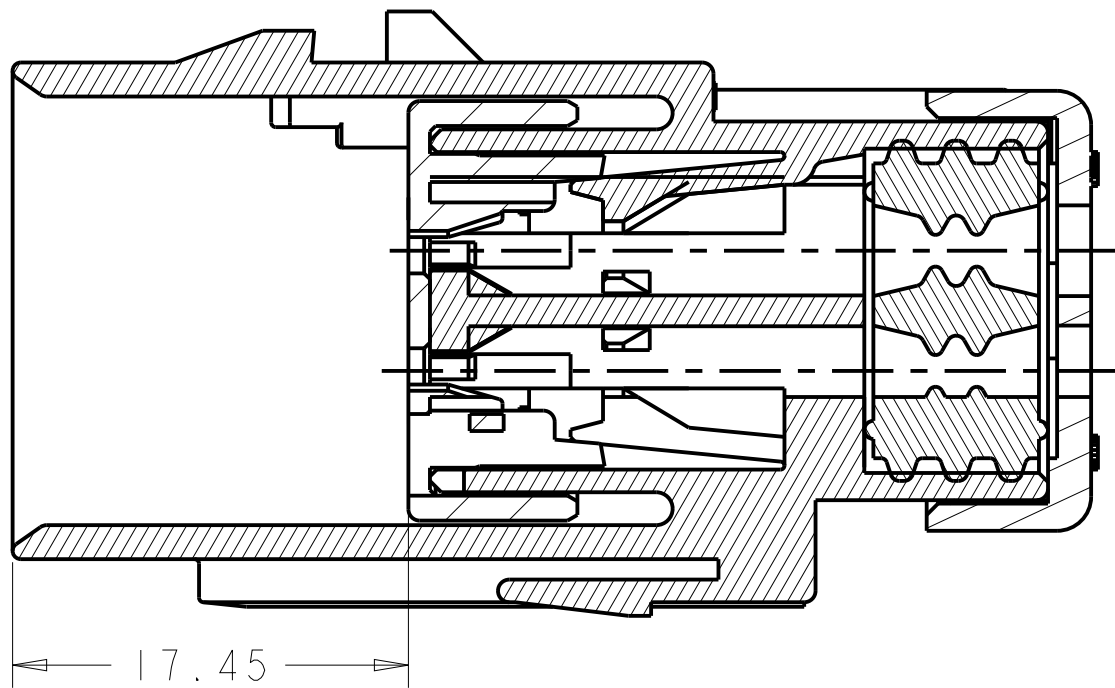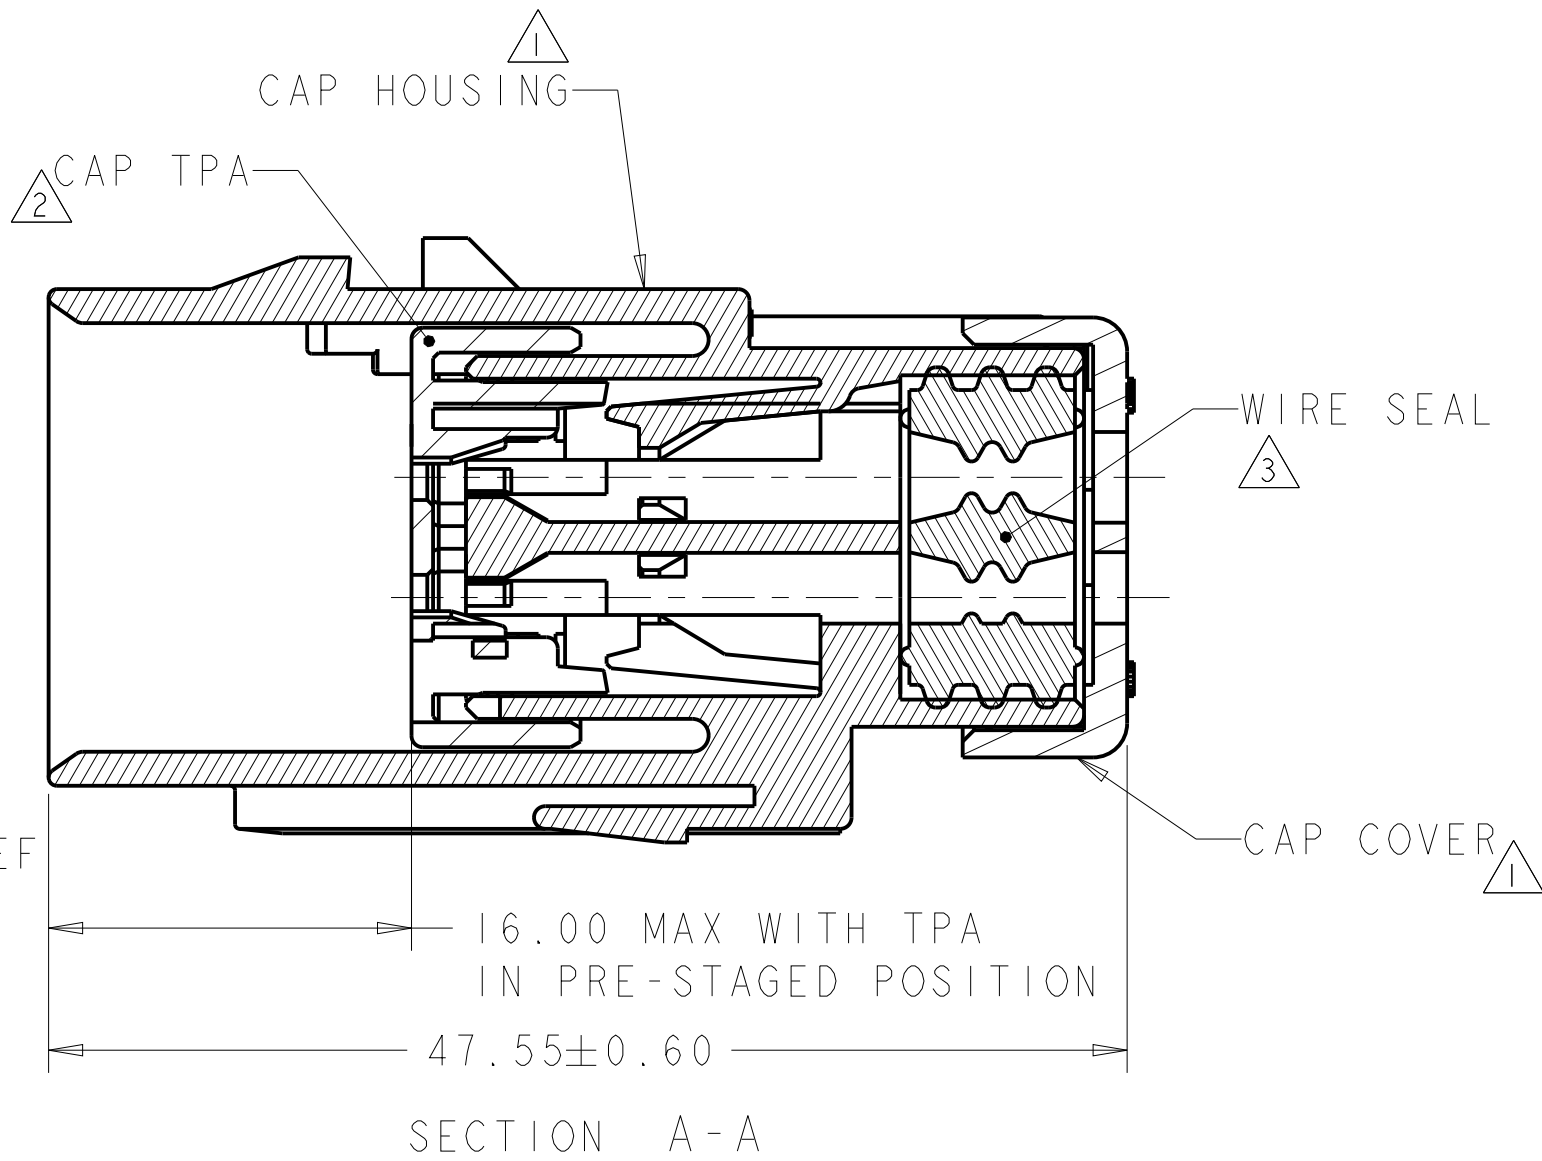

SECTION A-A
WITH TPA IN CLOSED POSITION

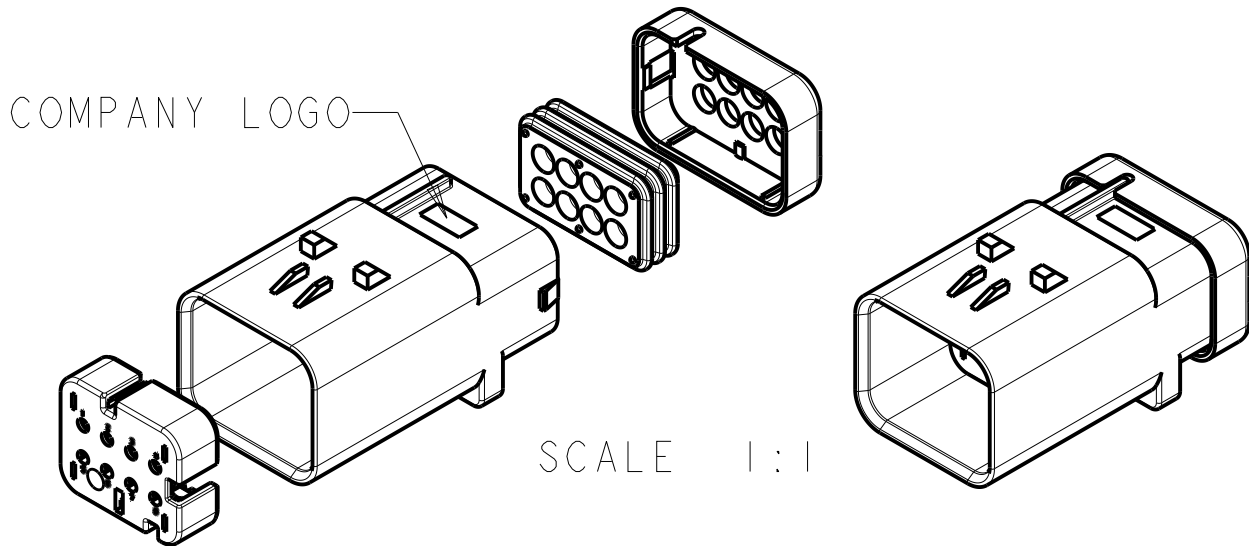

D	ORANGE	2320917-4
C	PURPLE	2320917-3
B	BLUE	2320917-2
A	TAN	2320917-1
KEY	TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. MCNEAL 18SEP2018	TE Connectivity			
DIMENSIONS:		CHK R. BALTER 18SEP2018				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. BALTER 18SEP2018	NAME			
mm		PRODUCT SPEC	CAP ASSEMBLY, 8 POSN, STD DIA SEAL, HI TEMP, AMPSEAL 16			
0 PLC ±		108-32602	SIZE			
1 PLC ±		APPLICATION SPEC	CAGE CODE			
2 PLC ±0.30		114-32362	DRAWING NO			
3 PLC ±		WEIGHT	RESTRICTED TO			
4 PLC ±		17.5±1g	SCALE			
ANGLES		CUSTOMER DRAWING	SHEET			
FINISH			OF			
-			REV			
-			A			