



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE	08APR2021	MK	BC

D


D

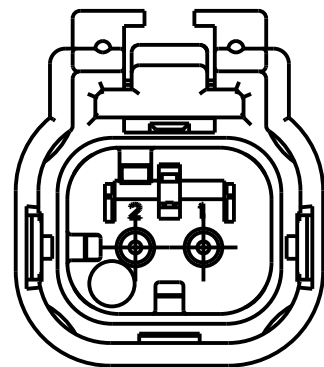

2320932-2
SCALE 2:1
KEY B

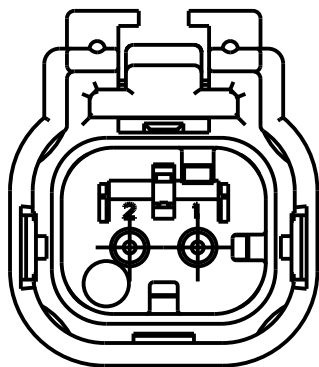


2320932-3
SCALE 2:1
KEY C

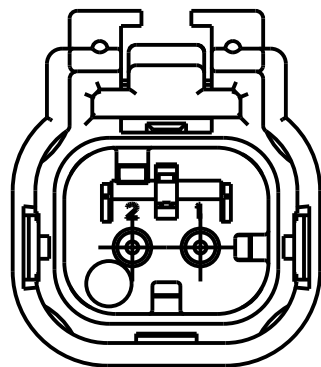

2320932-4
SCALE 2:1
KEY D

C


C

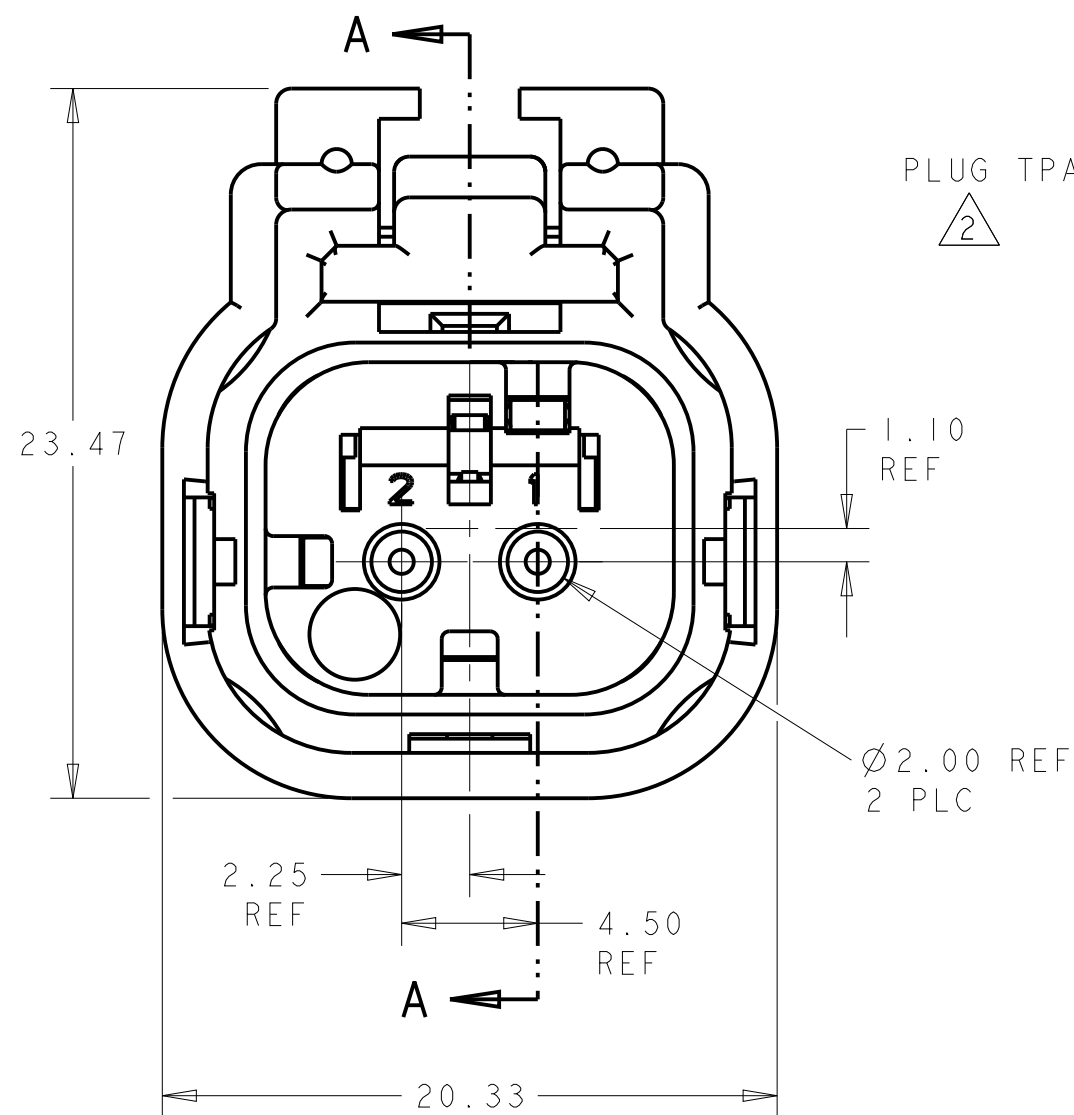

2320932-1 SHOWN
KEY A

B


B

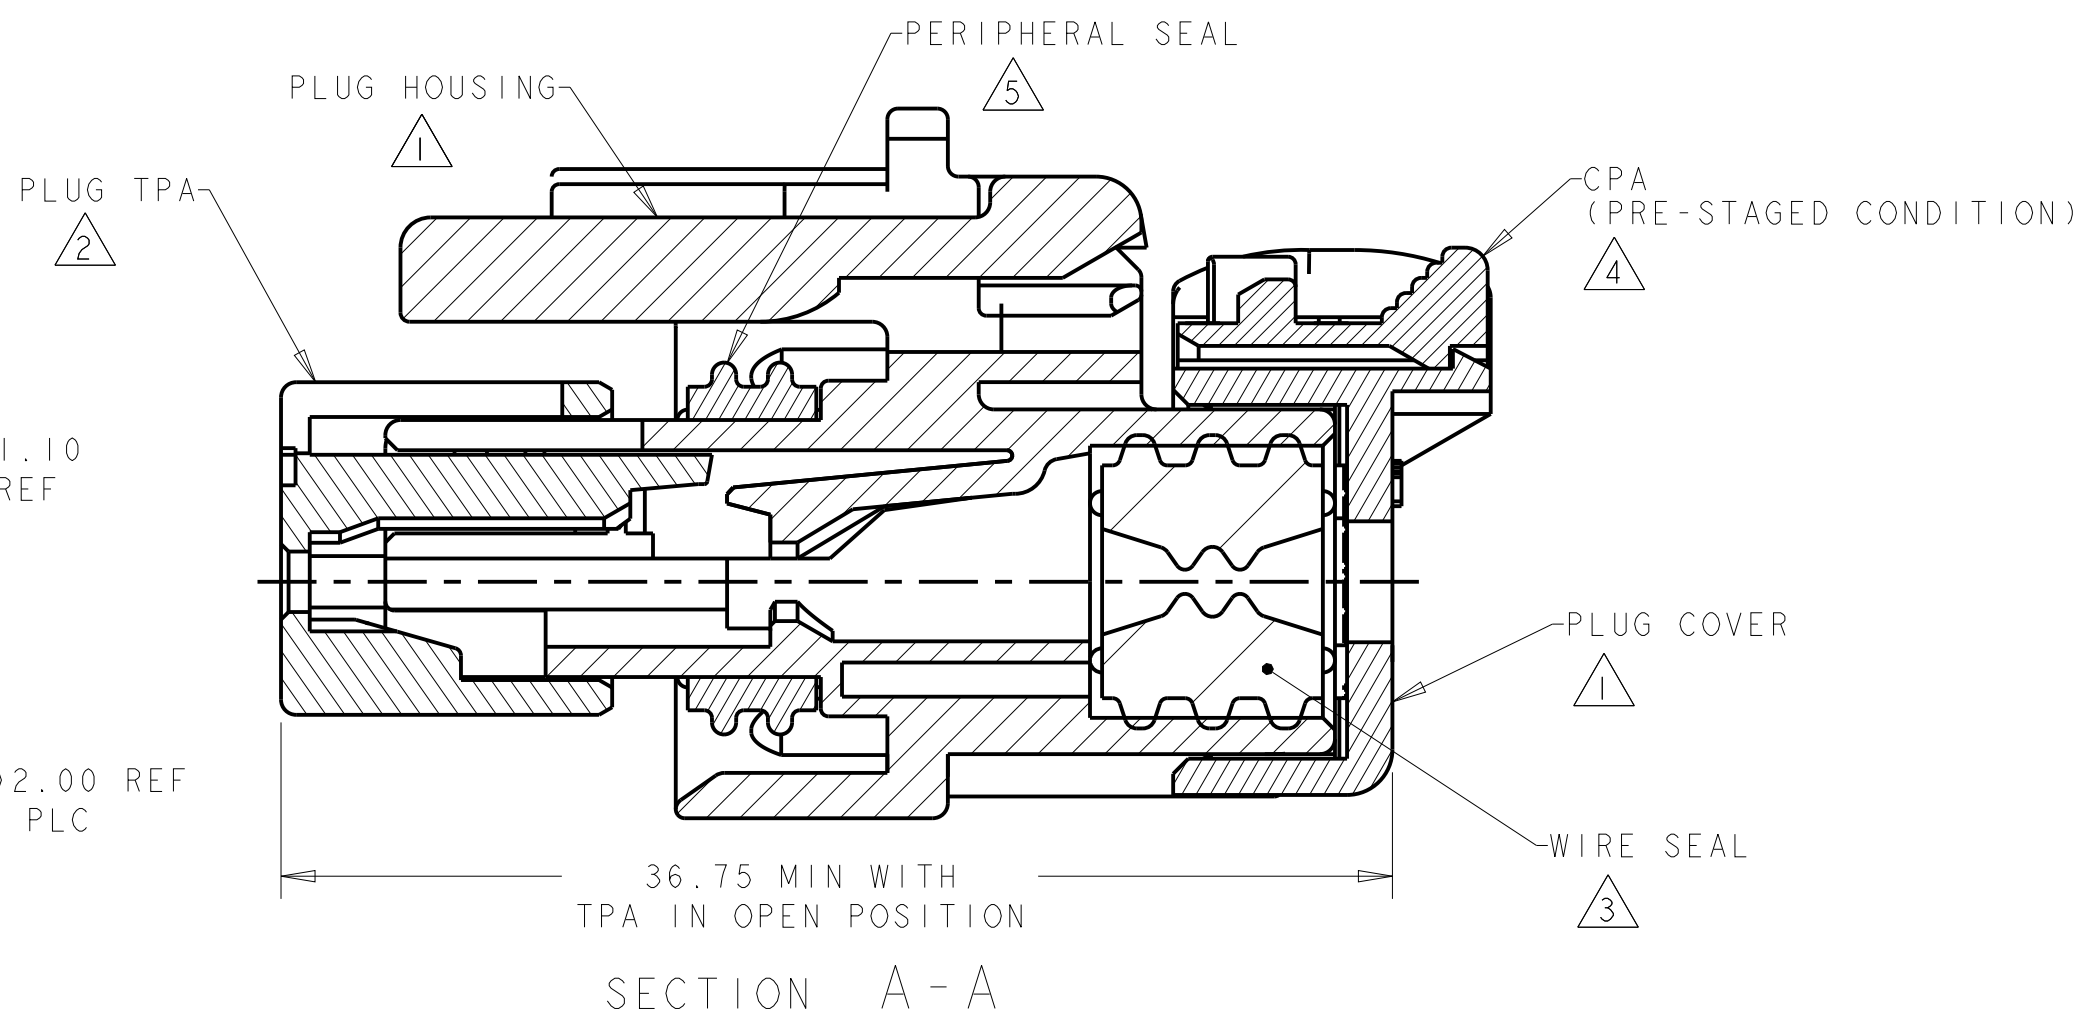

SECTION A-A


A

A

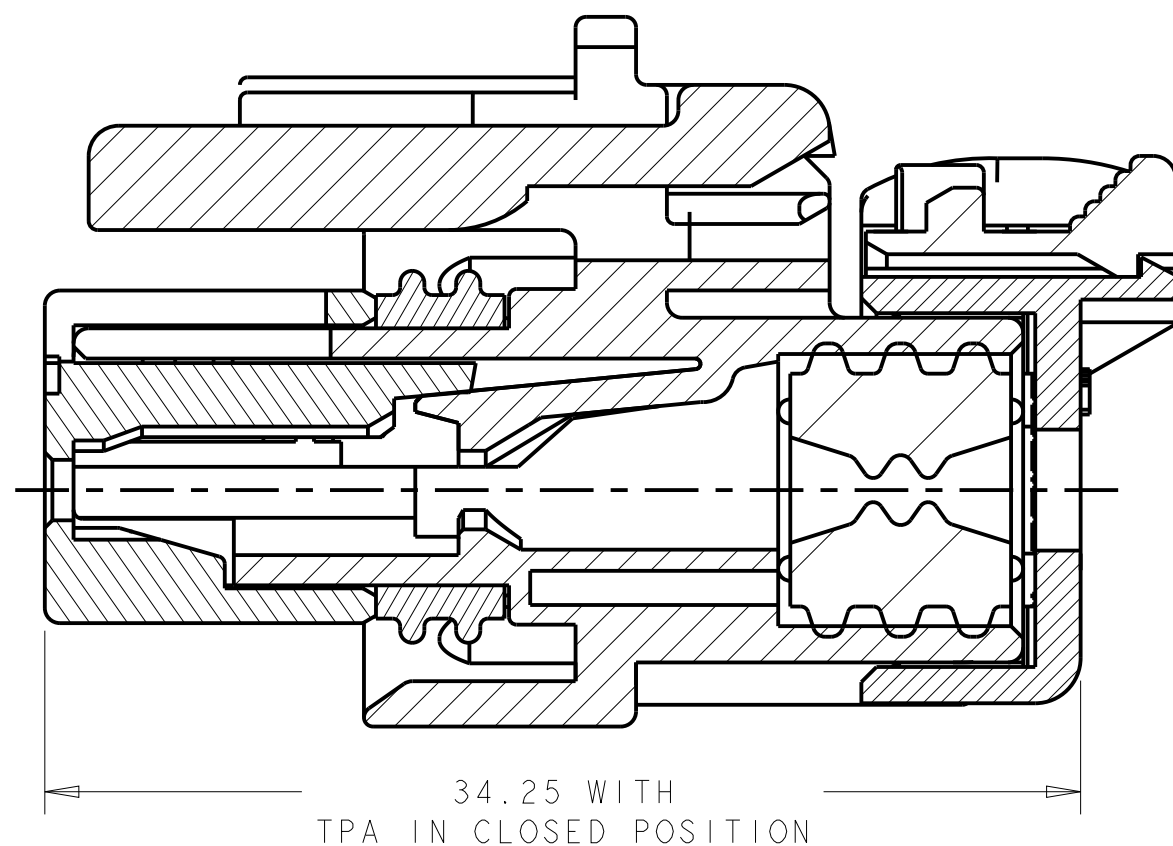

SECTION A-A

- 1 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: GRAY
- 2 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: (SEE TABLE)
- 3 MATERIAL: SILICONE
COLOR: LT GRAY
- 4 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: ORANGE
- 5 MATERIAL: SILICONE
COLOR: BLUE
6. RECOMMENDED WIRE DIAMETER RANGE IS 1.30 TO 2.54mm.
7. RECOMMENDED BACKSHELLS:
- STRAIGHT EXIT:
- A. 2292797-1 SMOOTH WIRE EXIT
 - B. 2292797-2 NC12/NW10 CONDUIT WIRE EXIT
 - C. 2292797-3 NC08/NW7.5 CONDUIT WIRE EXIT
- 90° EXIT:
- D. 2302488-1 SMOOTH WIRE EXIT
 - E. 2302488-2 NC12/NW10 CONDUIT WIRE EXIT
 - F. 2302488-3 NC08/NW7.5 CONDUIT WIRE EXIT
8. RECOMMENDED SEAL PLUG: 776363-1
9. MATING CONNECTOR: 2320926-X.

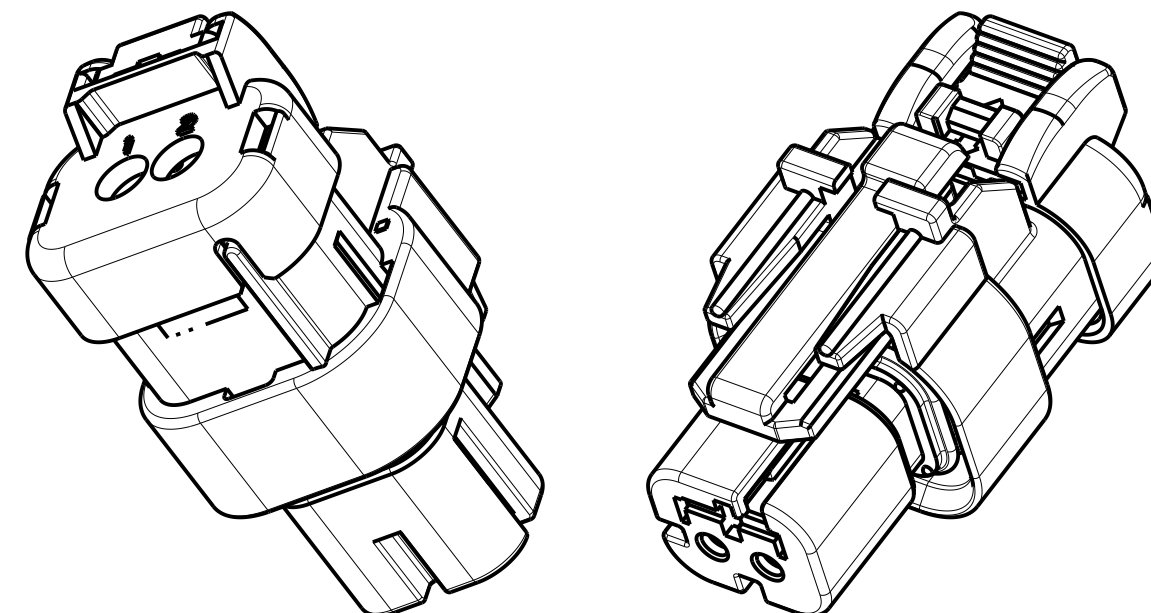

SCALE 2:1

D	ORANGE	2320932-4
C	PURPLE	2320932-3
B	BLUE	2320932-2
A	TAN	2320932-1
KEY	TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. MCNEAL 16JAN2018	TE Connectivity		
DIMENSIONS: mm		CHK R. BALTER 16JAN2018			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. BALTER 16JAN2018	NAME PLUG ASSEMBLY, 2 POSITION, REDUCED DIA SEAL, HI TEMP, AMPSEAL 16		
0 PLC ± 1 PLC ± 2 PLC ±0.30 3 PLC ± 4 PLC ± ANGLES ±1° FINISH		PRODUCT SPEC 108-32602 APPLICATION SPEC 114-32362 WEIGHT 8g	SIZE A2	CAGE CODE b0779	DRAWING NO C-2320932
MATERIAL - -		CUSTOMER DRAWING	SCALE 4:1	SHEET OF	REV A