
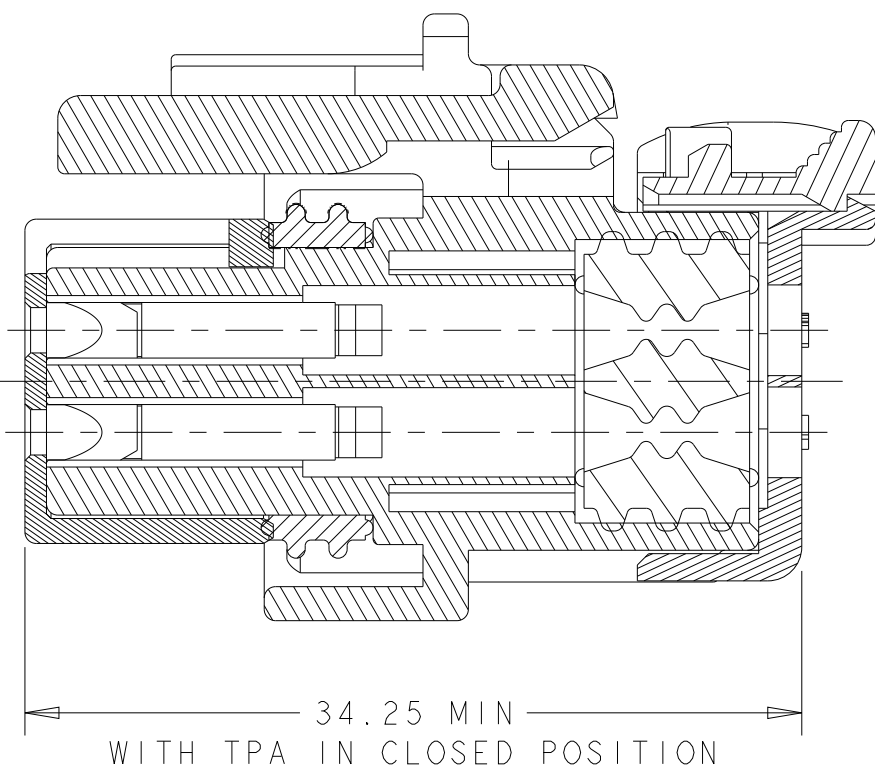
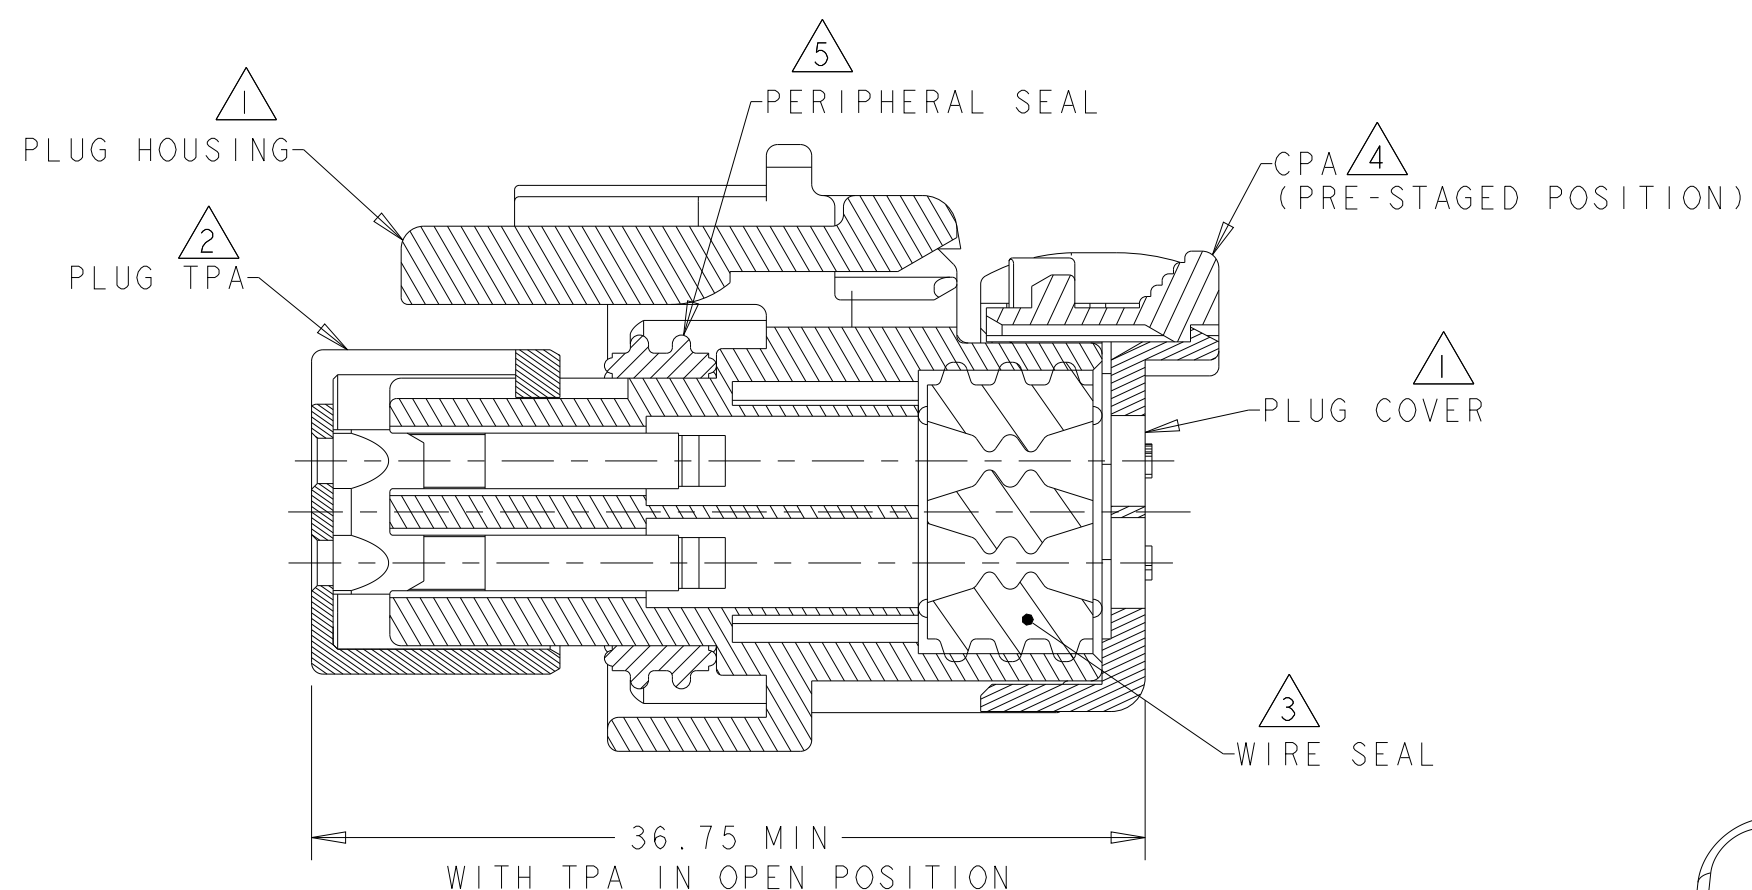
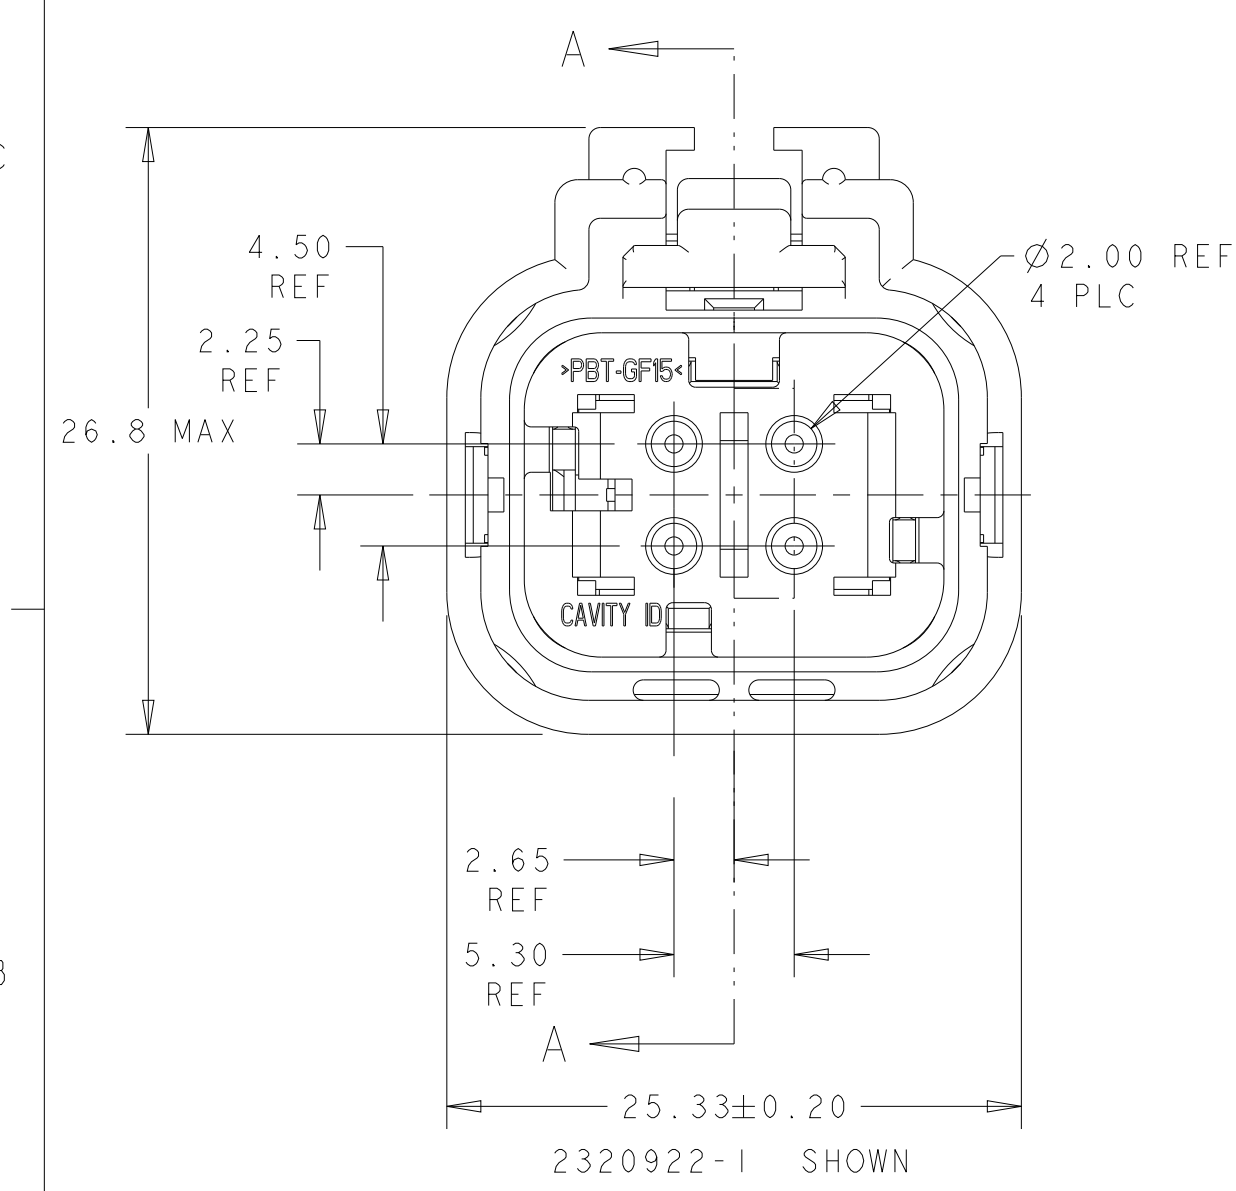


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE	08APR2021	MK	BC

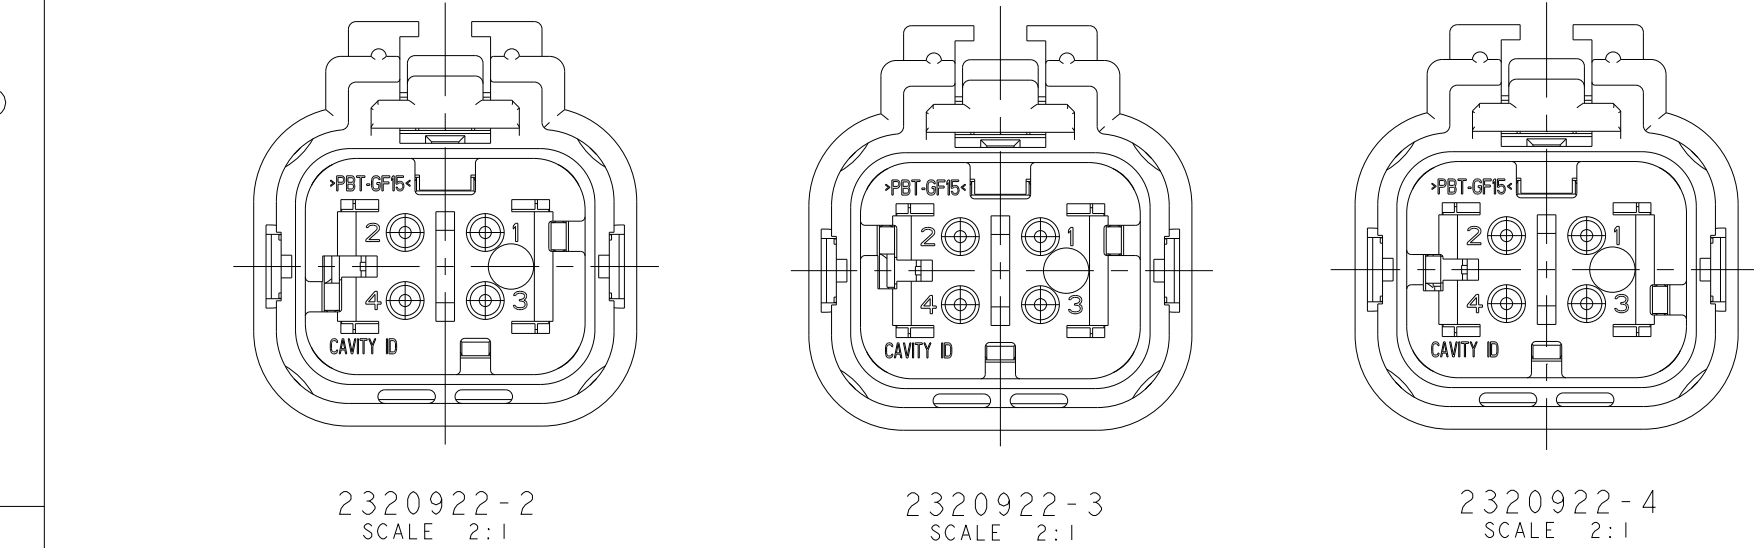

- 1


MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: GRAY
- 2

MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: (SEE TABLE)
- 3

MATERIAL: SILICONE
COLOR: RUST
- 4

MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: ORANGE
- 5

MATERIAL: SILICONE
COLOR: TAN
6. RECOMMENDED WIRE DIAMETER RANGE IS 1.30 TO 2.54mm.
7. RECOMMENDED BACKSHELLS:
STRAIGHT EXIT:
A. 2292799-1 SMOOTH WIRE EXIT
B. 2292799-2 NC16/NW13 CONDUIT WIRE EXIT
C. 2292799-3 NC12/NW10 CONDUIT WIRE EXIT
90° EXIT:
D. 2302492-1 SMOOTH WIRE EXIT
E. 2302492-2 NC16/NW13 CONDUIT WIRE EXIT
F. 2302492-3 NC12/NW10 CONDUIT WIRE EXIT
8. RECOMMENDED SEAL PLUG: 776363-1
9. MATING CONNECTOR: 2320928-X

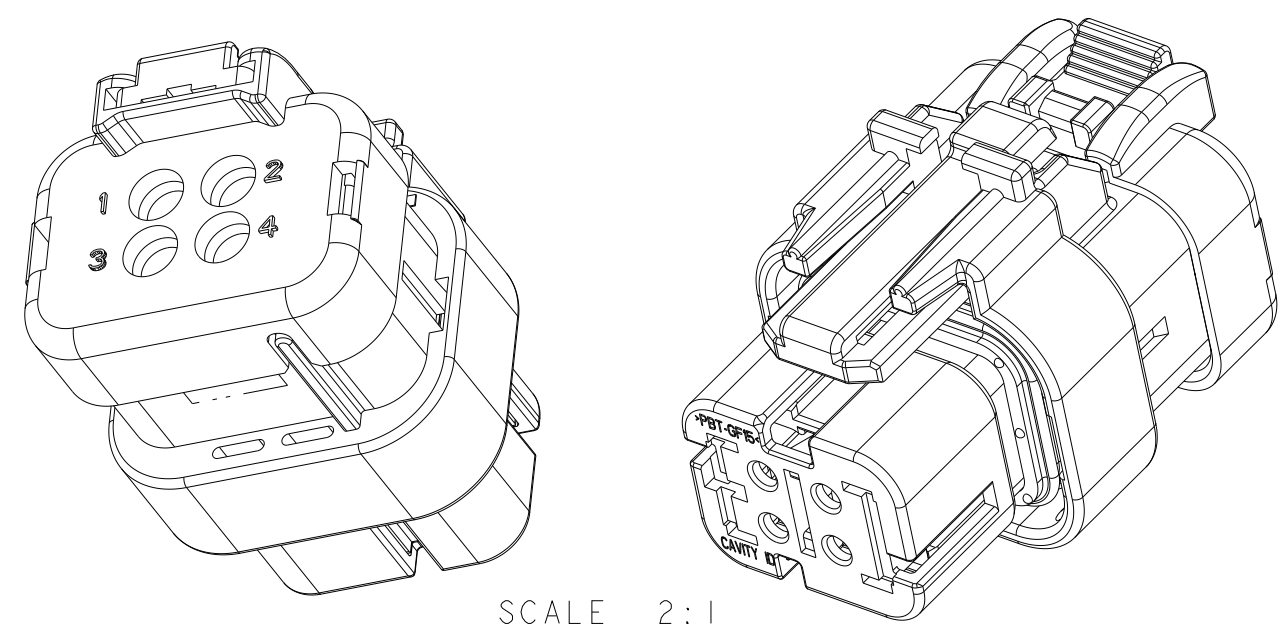

D	ORANGE	2320934-4
C	PURPLE	2320934-3
B	BLUE	2320934-2
A	TAN	2320934-1
KEY	TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J MCNEAL 03APR2018	TE Connectivity			
DIMENSIONS: mm		CHK R BALTER 03APR2018				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R BALTER 03APR2018	NAME PLUG ASSEMBLY, 4 POSITION REDUCED DIA SEAL, HIGH TEMP, AMPSEAL 16			
0 PLC ± 1 PLC ± 2 PLC ±0.20 3 PLC ± 4 PLC ± ANGLES ± FINISH -		PRODUCT SPEC 108-32602 APPLICATION SPEC 114-32362 WEIGHT 12.5±1g	SIZE A2	CAGE CODE -	DRAWING NO C-2320934	RESTRICTED TO -
CUSTOMER DRAWING				SCALE 1:1	SHEET 1 OF 1	REV A