




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE	08APR2021	MK	BC

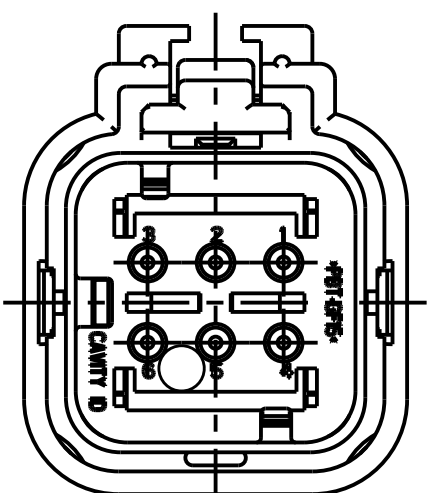


2320935-2 SHOWN
SCALE 2:1

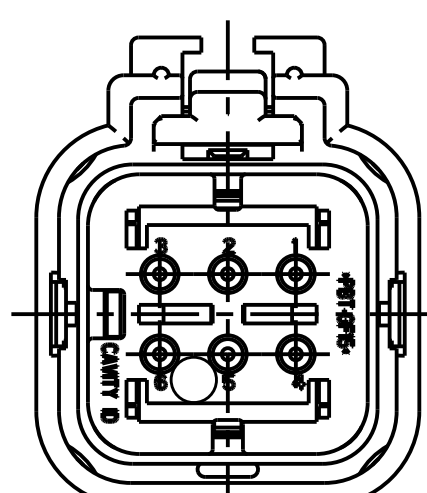


2320935-3 SHOWN
SCALE 2:1

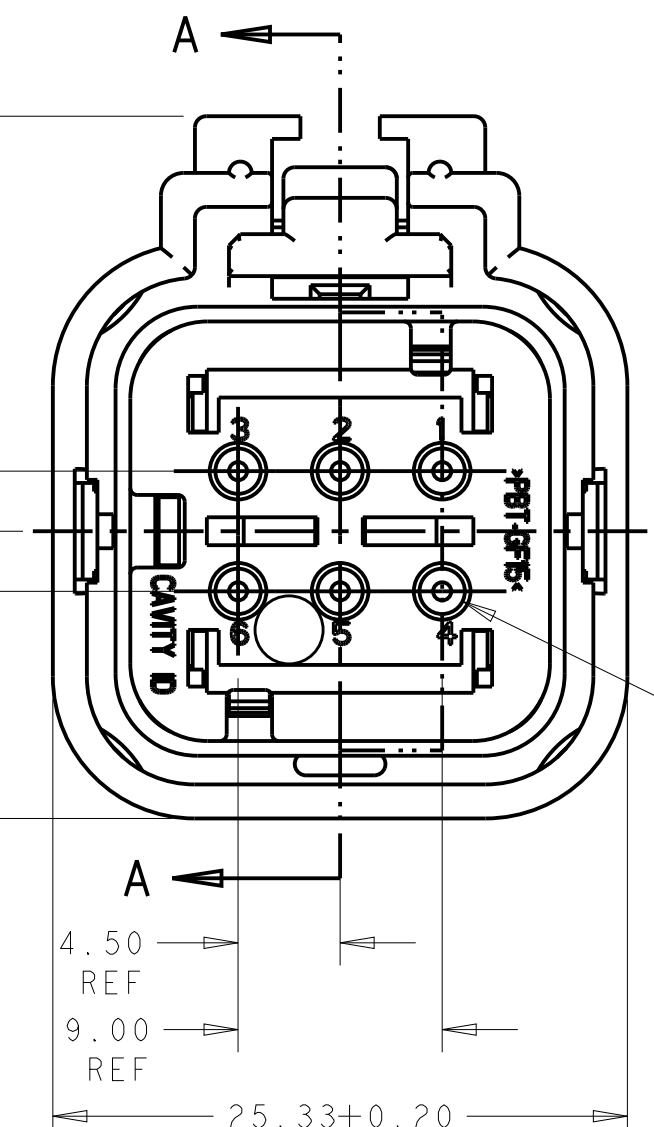

2320935-1 SHOWN

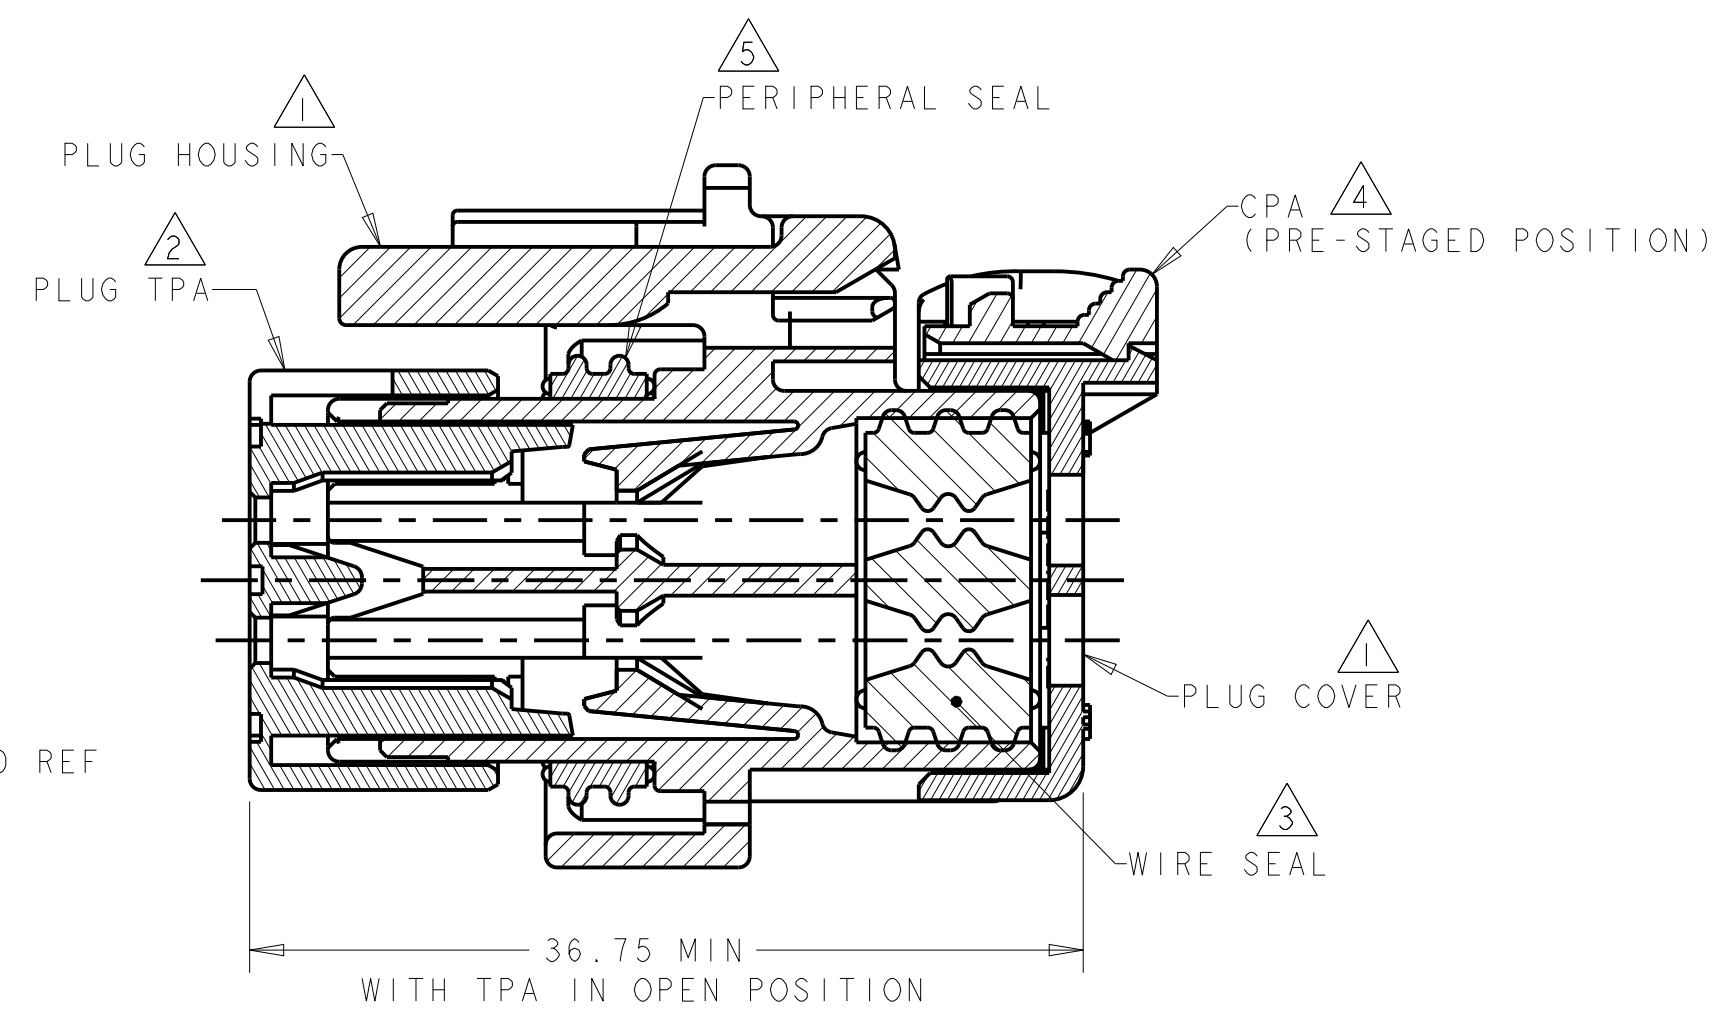


SECTION A-A

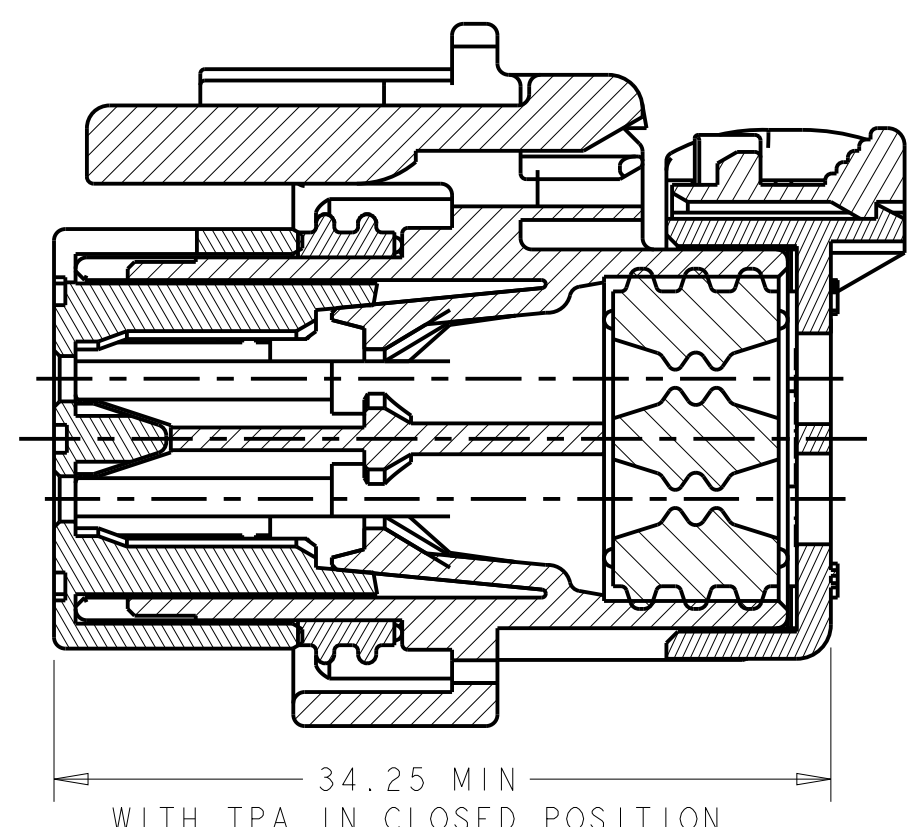

SECTION A-A

- 1 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: GRAY
- 2 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: (SEE TABLE)
- 3 MATERIAL: SILICONE
COLOR: LIGHT GRAY
- 4 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: ORANGE
- 5 MATERIAL: SILICONE
COLOR: BLUE
6. RECOMMENDED WIRE DIAMETER RANGE IS 1.30 TO 2.54mm.
7. RECOMMENDED BACKSHELLS:
- STRAIGHT EXIT:
A. 2292800-1 SMOOTH WIRE EXIT
B. 2292800-2 NC16/NW13 CONDUIT WIRE EXIT
C. 2292800-3 NC12/NW10 CONDUIT WIRE EXIT
- 90° EXIT:
D. 2302493-1 SMOOTH WIRE EXIT
E. 2302493-2 NC16/NW13 CONDUIT WIRE EXIT
F. 2302493-3 NC12/NW10 CONDUIT WIRE EXIT
8. RECOMMENDED SEAL PLUG: 776363-1
9. MATING CONNECTOR: 2320929-X

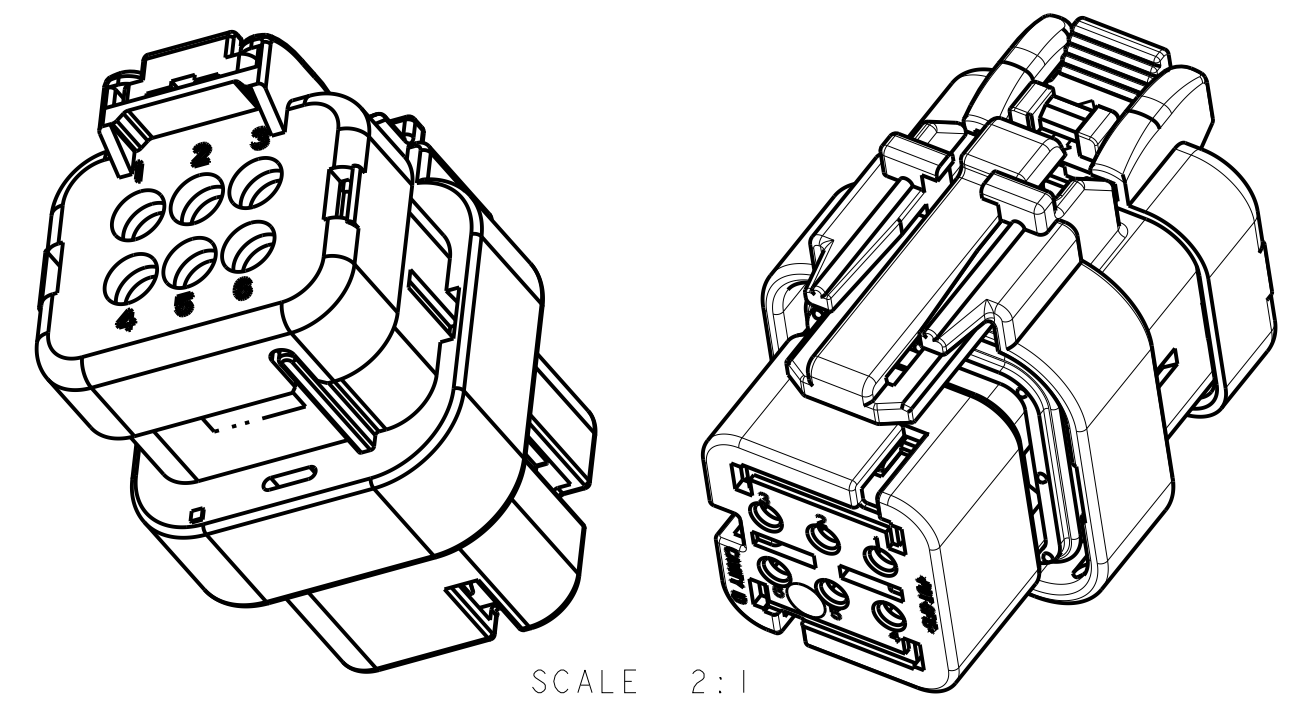

SCALE 2:1

C	PURPLE	2320935-3
B	BLUE	2320935-2
A	TAN	2320935-1
KEY	TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. MCNEAL 18SEP2018	TE Connectivity			
DIMENSIONS: mm		CHK R. BALTER 18SEP2018				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. BALTER 18SEP2018	NAME PLUG ASSEMBLY, 6 POSITION REDUCED DIA SEAL, HIGH TEMP AMPSEAL 16			
0 PLC ± 1 PLC ± 2 PLC ±0.20 3 PLC ± 4 PLC ± ANGLES ± FINISH		PRODUCT SPEC 108-32602 APPLICATION SPEC 114-32362 WEIGHT 14±1g	SIZE A2	CAGE CODE -	DRAWING NO C-2320935	RESTRICTED TO
MATERIAL -		CUSTOMER DRAWING	SCALE 1:1	SHEET OF	REV A	