



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE	08APR2021	MK	BC

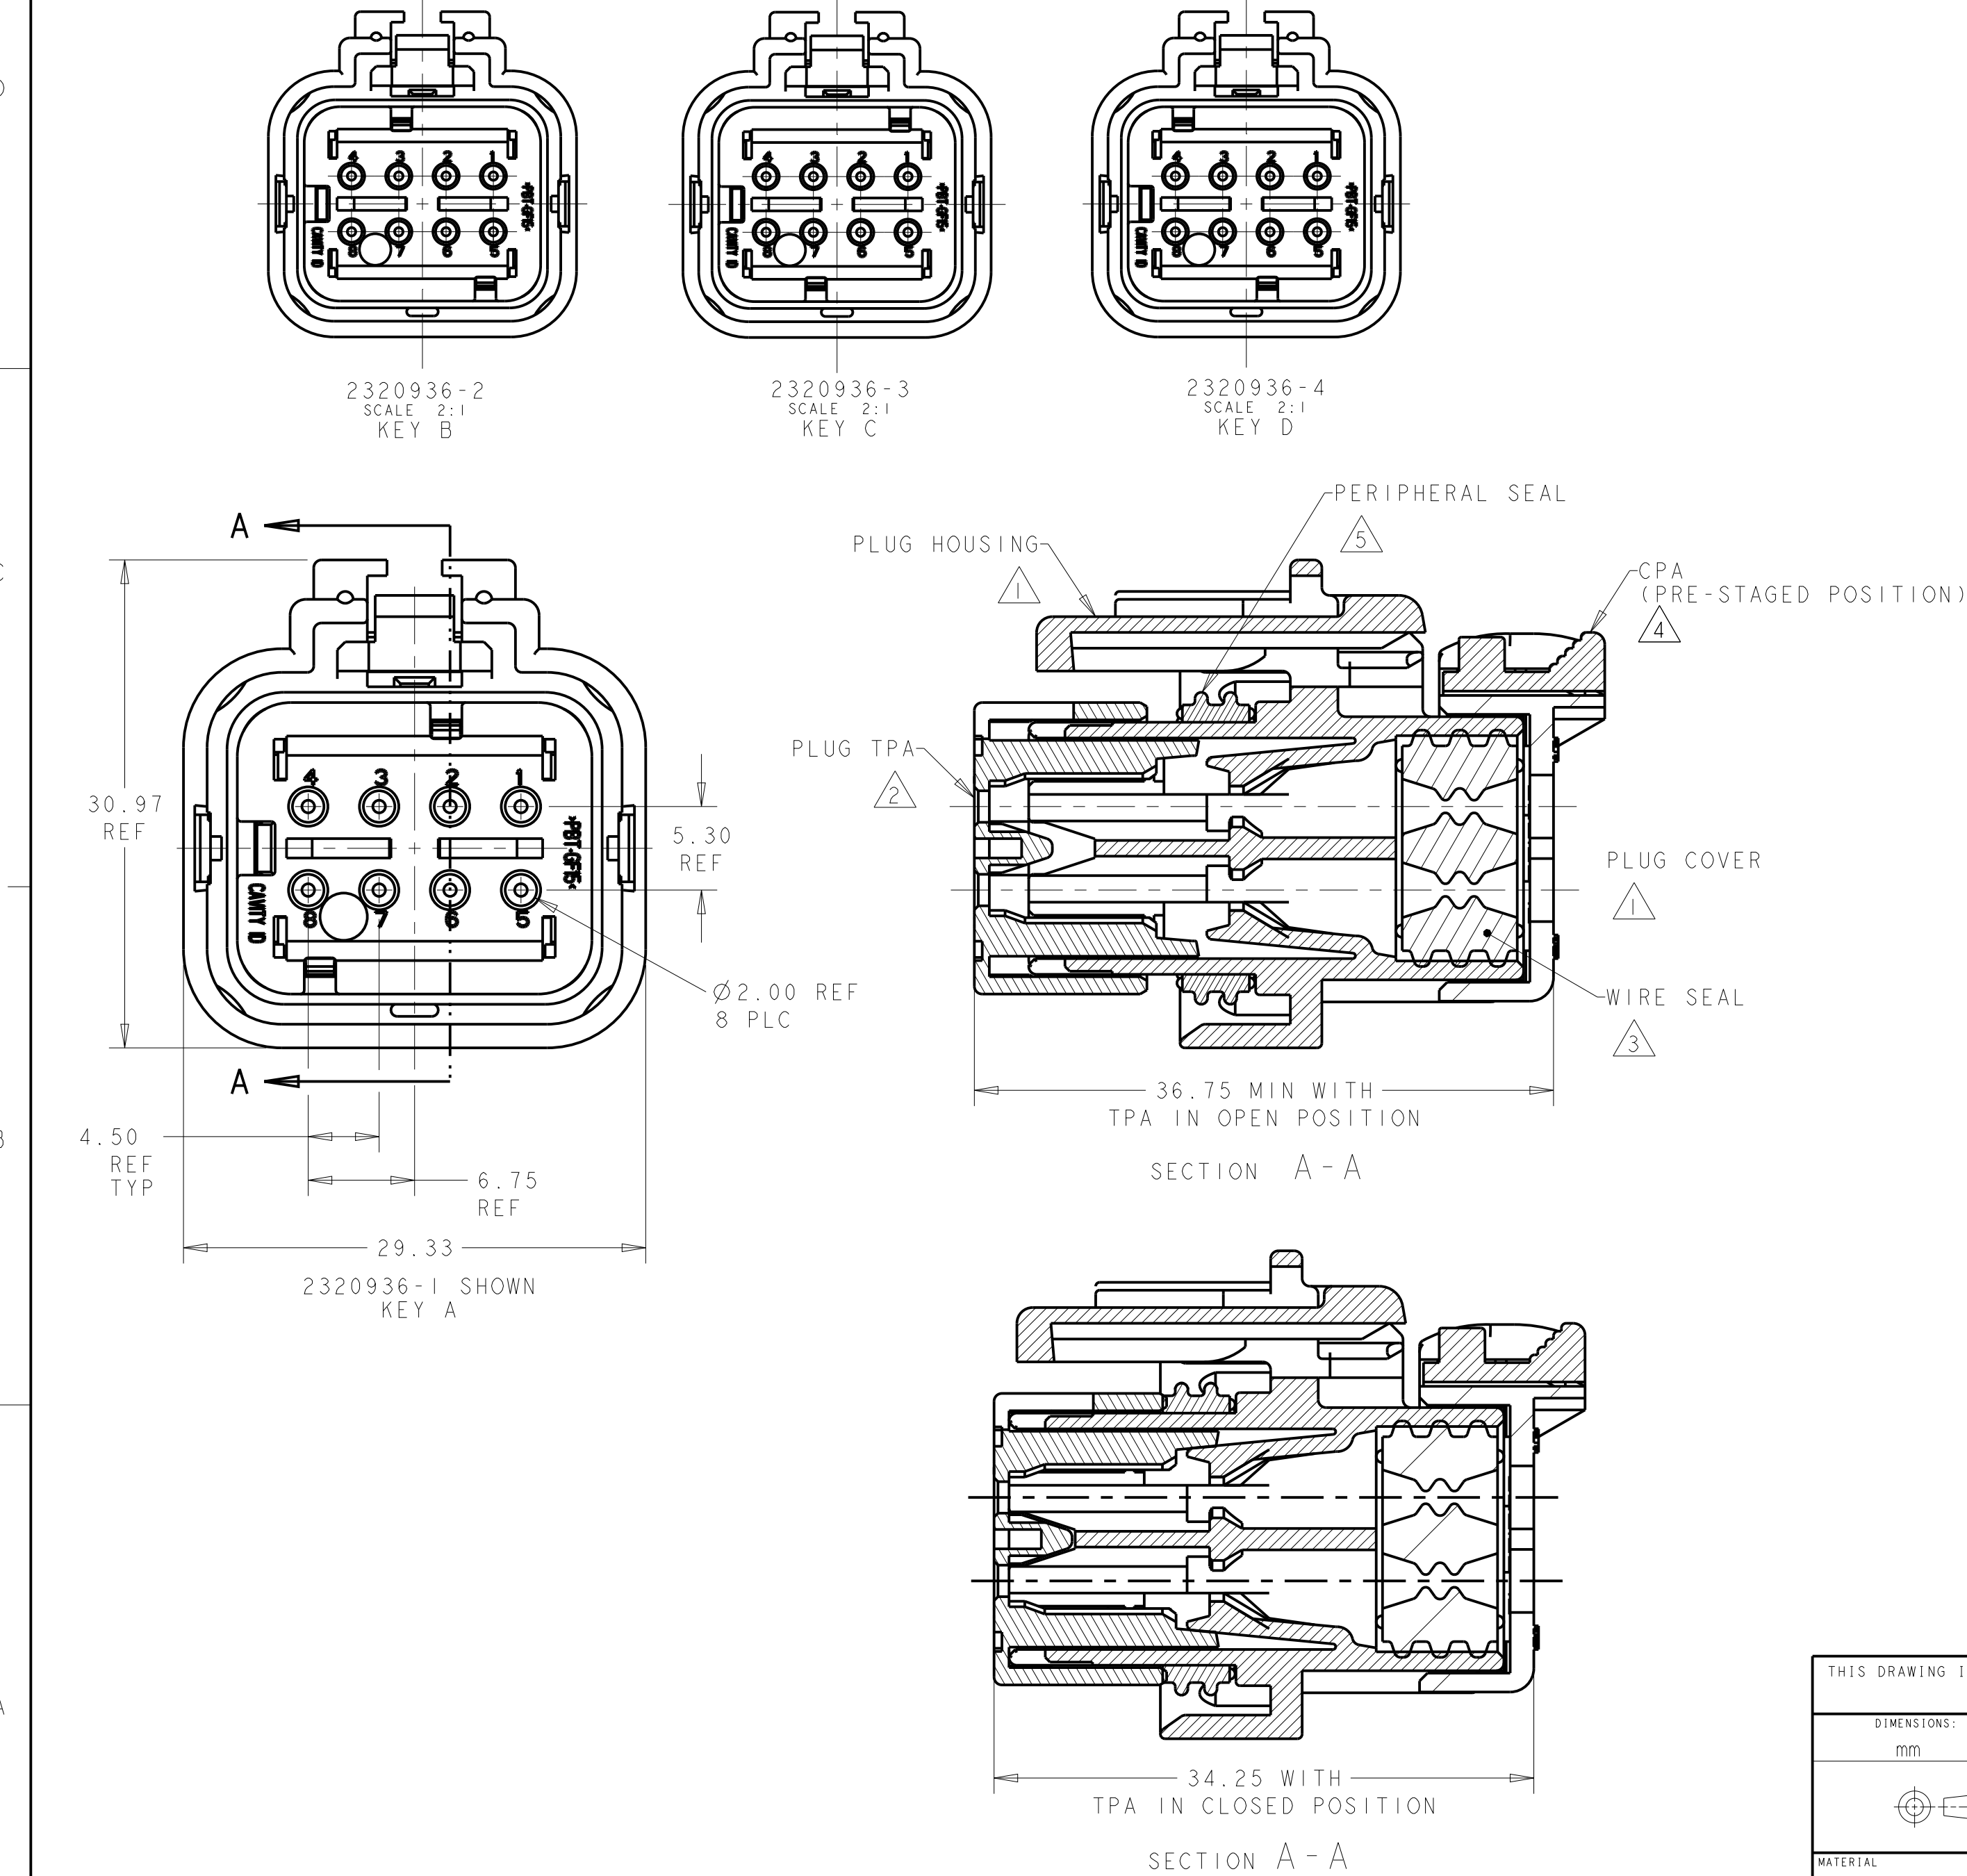

- 1 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: GRAY
- 2 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: (SEE TABLE)
- 3 MATERIAL: SILICONE
COLOR: RUST
- 4 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: ORANGE
- 5 MATERIAL: SILICONE
COLOR: TAN
6. RECOMMENDED WIRE DIAMETER RANGE IS 1.30 TO 2.54mm.
7. RECOMMENDED BACKSHELLS:
- STRAIGHT EXIT:
- A. 2292801-1 SMOOTH WIRE EXIT
 - B. 2292801-2 NC20/NW17 CONDUIT WIRE EXIT
 - C. 2292801-3 NC16/NW13 CONDUIT WIRE EXIT
- 90° EXIT:
- D. 2302494-1 SMOOTH WIRE EXIT
 - E. 2302494-2 NC20/NW17 CONDUIT WIRE EXIT
 - F. 2302494-3 NC16/NW13 CONDUIT WIRE EXIT
8. RECOMMENDED SEAL PLUG: 776363-1
9. MATING CONNECTOR: 2320930-X.

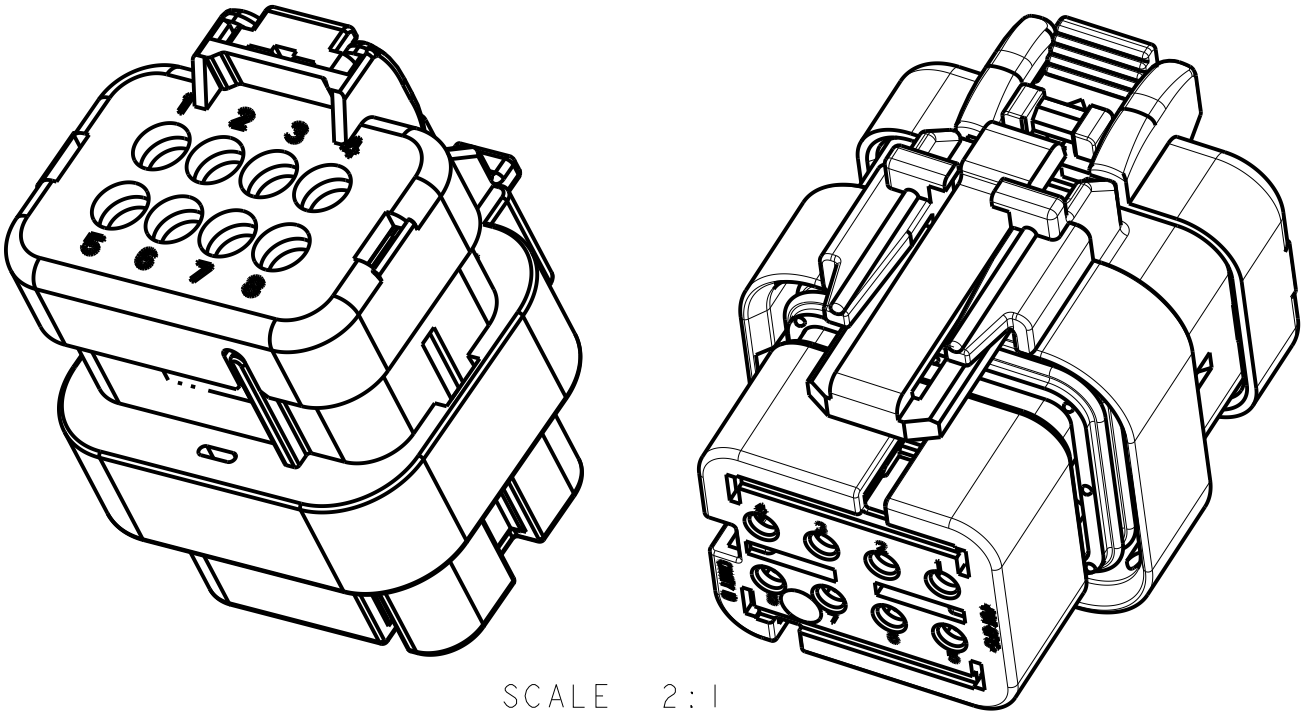

D	ORANGE	2320936-4
C	PURPLE	2320936-3
B	BLUE	2320936-2
A	TAN	2320936-1
KEY	TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. MCNEAL 18SEP2018	TE Connectivity			
DIMENSIONS: mm		CHK R. BALTER 18SEP2018				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. BALTER 18SEP2018	NAME PLUG ASSEMBLY, 8 POSITION REDUCED DIA SEAL, HIGH TEMP, AMPSEAL 16			
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH		PRODUCT SPEC 108-32602 APPLICATION SPEC 114-32362 WEIGHT 16±1g	SIZE A2			
MATERIAL -		CUSTOMER DRAWING	CAGE CODE -			
			DRAWING NO C-2320936			
			RESTRICTED TO			
			SCALE 2:1 SHEET 1 OF 1 REV A			