




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE	07APR2021	MK	BC

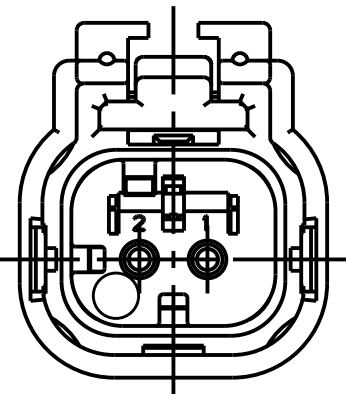


2320920-2
SCALE 2:1
KEY B

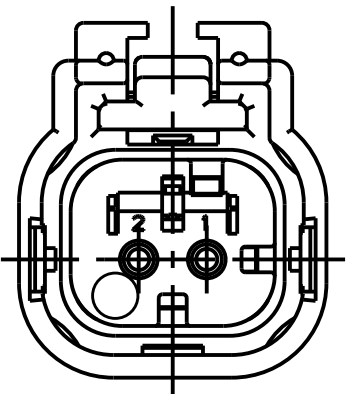



2320920-3
SCALE 2:1
KEY C

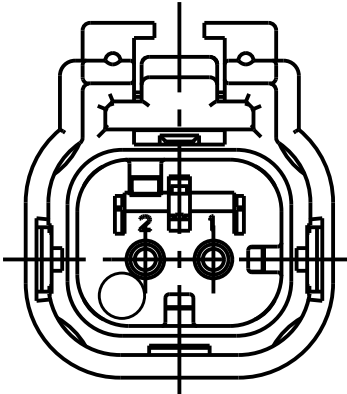


2320920-4
SCALE 2:1
KEY D

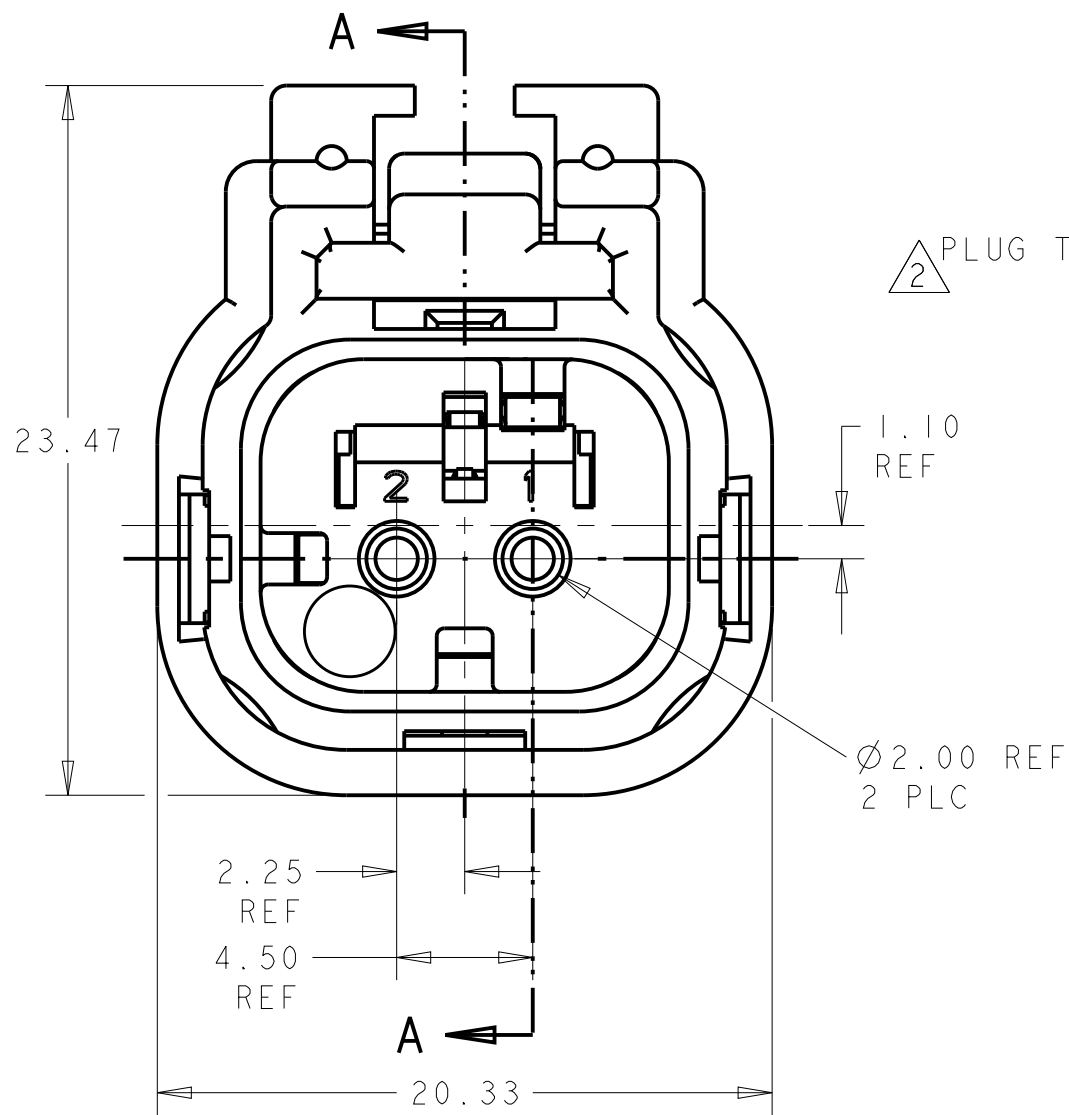

2320920-1 SHOWN
KEY A

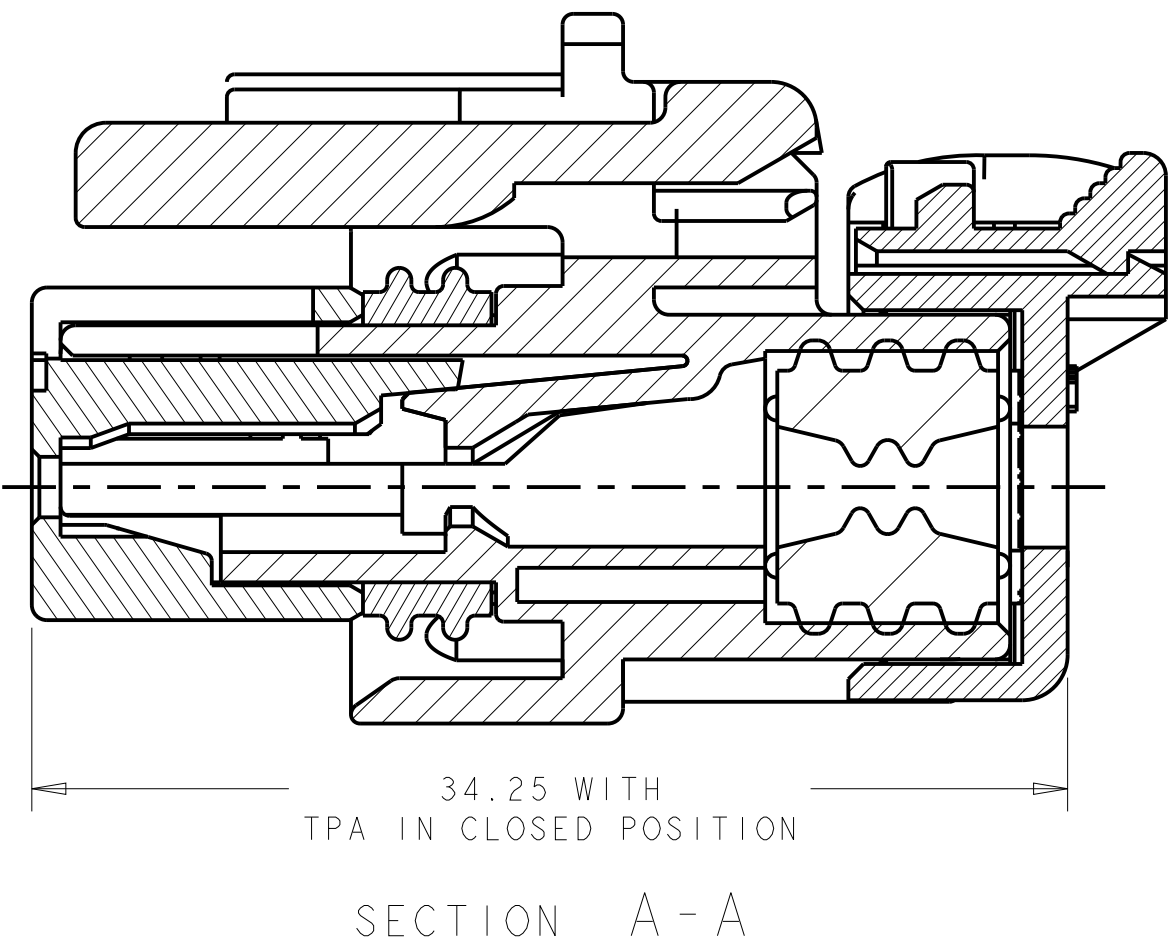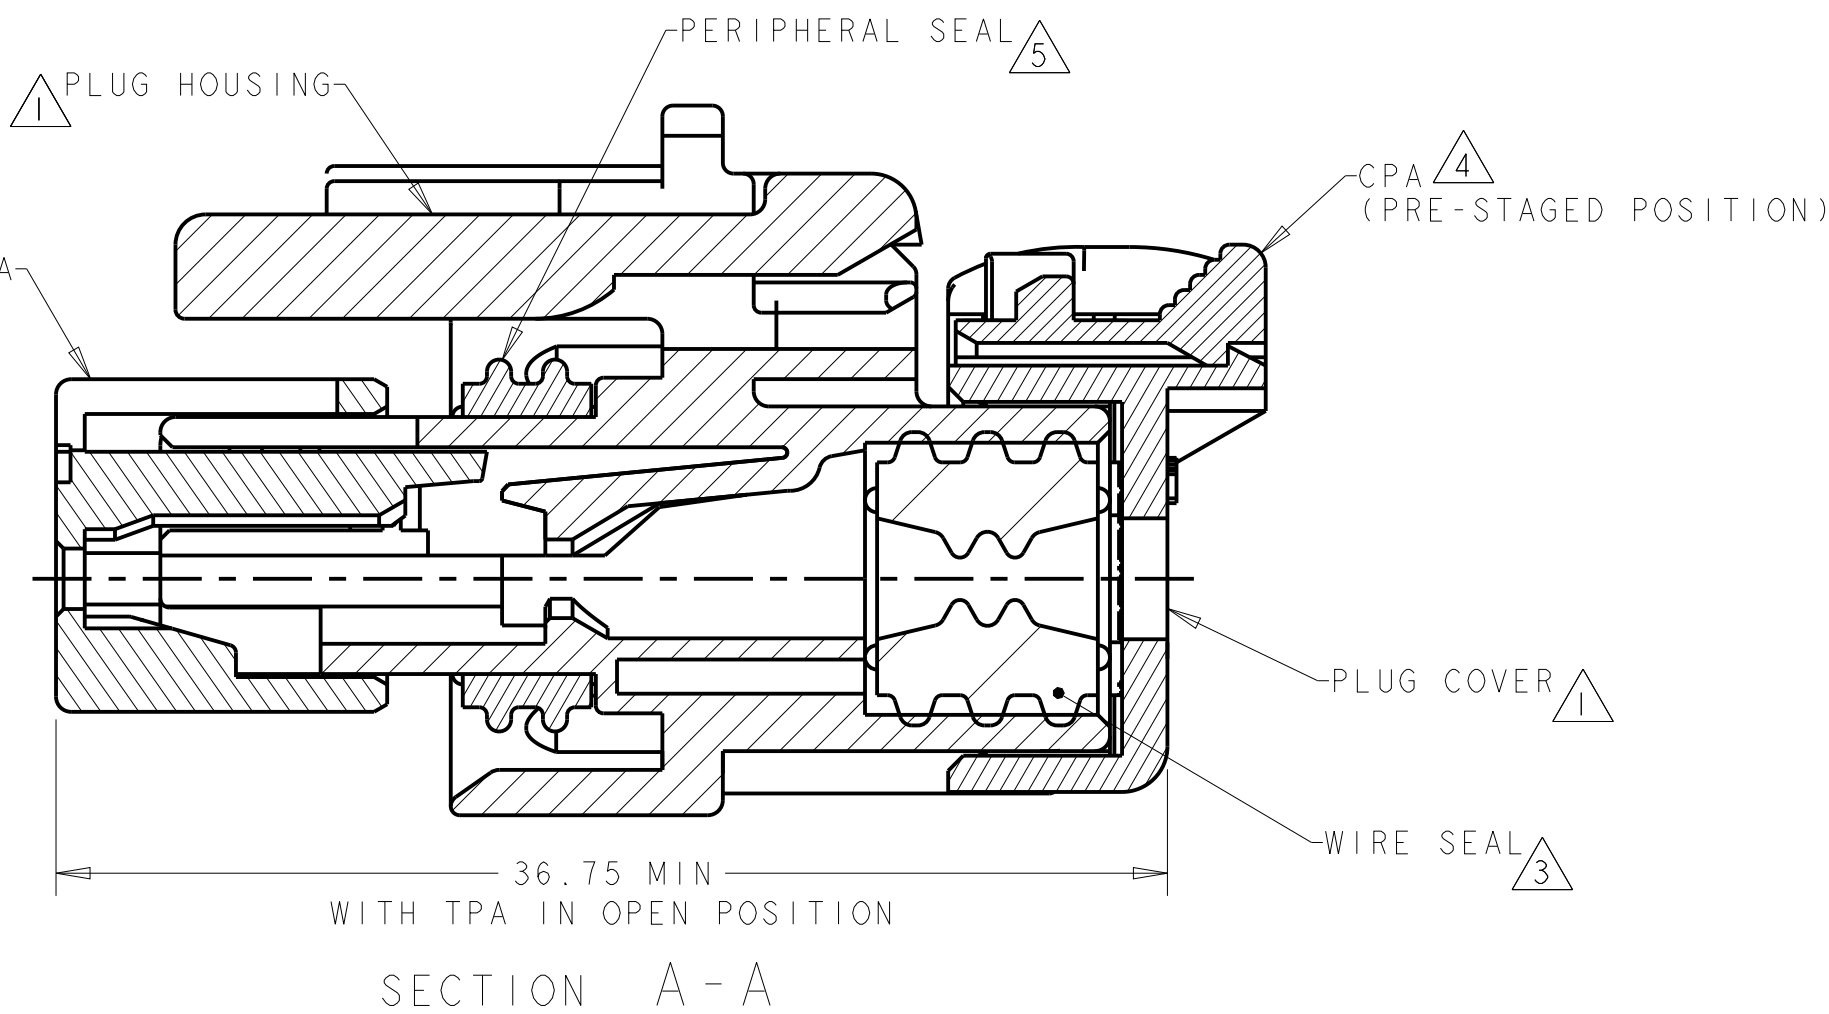

- 1 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: GRAY
- 2 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: (SEE TABLE)
- 3 MATERIAL: SILICONE
COLOR: MARINE BLUE
- 4 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: ORANGE
- 5 MATERIAL: SILICONE
COLOR: BLUE
6. RECOMMENDED WIRE DIAMETER RANGE IS 2.18 TO 3.67mm.
7. RECOMMENDED BACKSHELLS:
- STRAIGHT EXIT:
- A. 2292797-1 SMOOTH WIRE EXIT
 - B. 2292797-2 NC12/NW10 CONDUIT WIRE EXIT
 - C. 2292797-3 NC08/NW7.5 CONDUIT WIRE EXIT
- 90° EXIT:
- D. 2302488-1 SMOOTH WIRE EXIT
 - E. 2302488-2 NC12/NW10 CONDUIT WIRE EXIT
 - F. 2302488-3 NC08/NW7.5 CONDUIT WIRE EXIT
8. RECOMMENDED SEAL PLUG: 776363-1
9. MATING CONNECTOR: 2320913-X

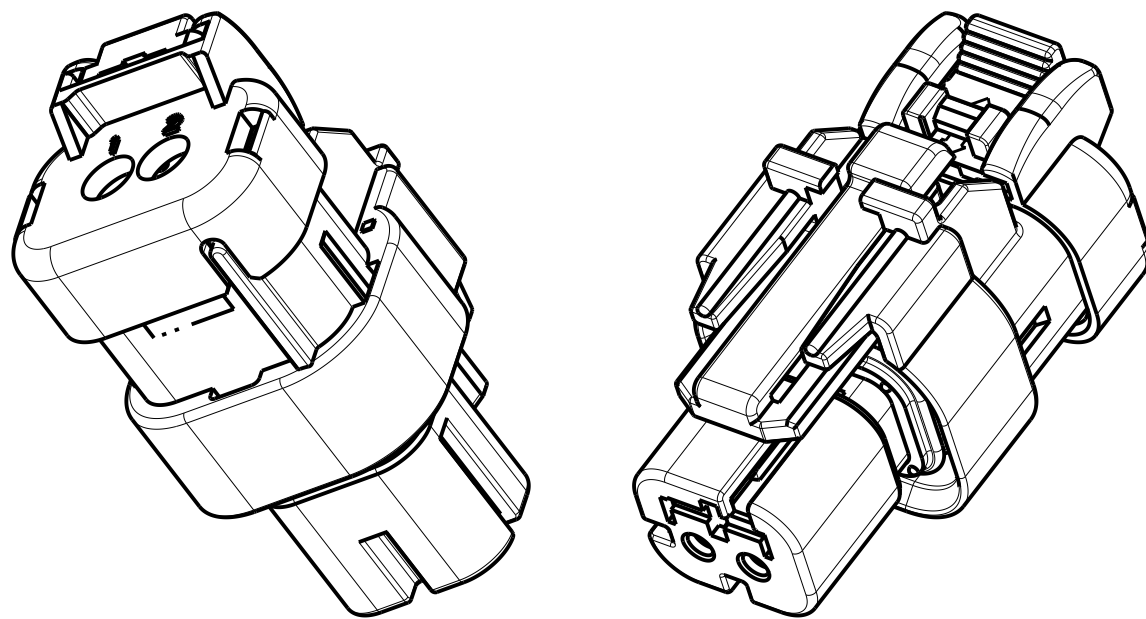

SCALE 2:1

D	ORANGE	2320920-4
C	PURPLE	2320920-3
B	BLUE	2320920-2
A	TAN	2320920-1
KEY	TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. MCNEAL 04JAN2018	TE Connectivity			
		CHK R. BALTER 04JAN2018				
		APVD R. BALTER 04JAN2018	NAME PLUG ASSEMBLY, 2 POSITION, STD DIA SEAL, HIGH TEMP, AMPSEAL 16			
DIMENSIONS:		PRODUCT SPEC	SIZE			
mm		108-32602	CAGE CODE			
		APPLICATION SPEC	DRAWING NO			
		114-32362	RESTRICTED TO			
MATERIAL		WEIGHT	A2b0779C-2320920			
		8g	SCALE 4:1			
		CUSTOMER DRAWING	SHEET OF REV A			