


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE	07APR2021	MK	BC

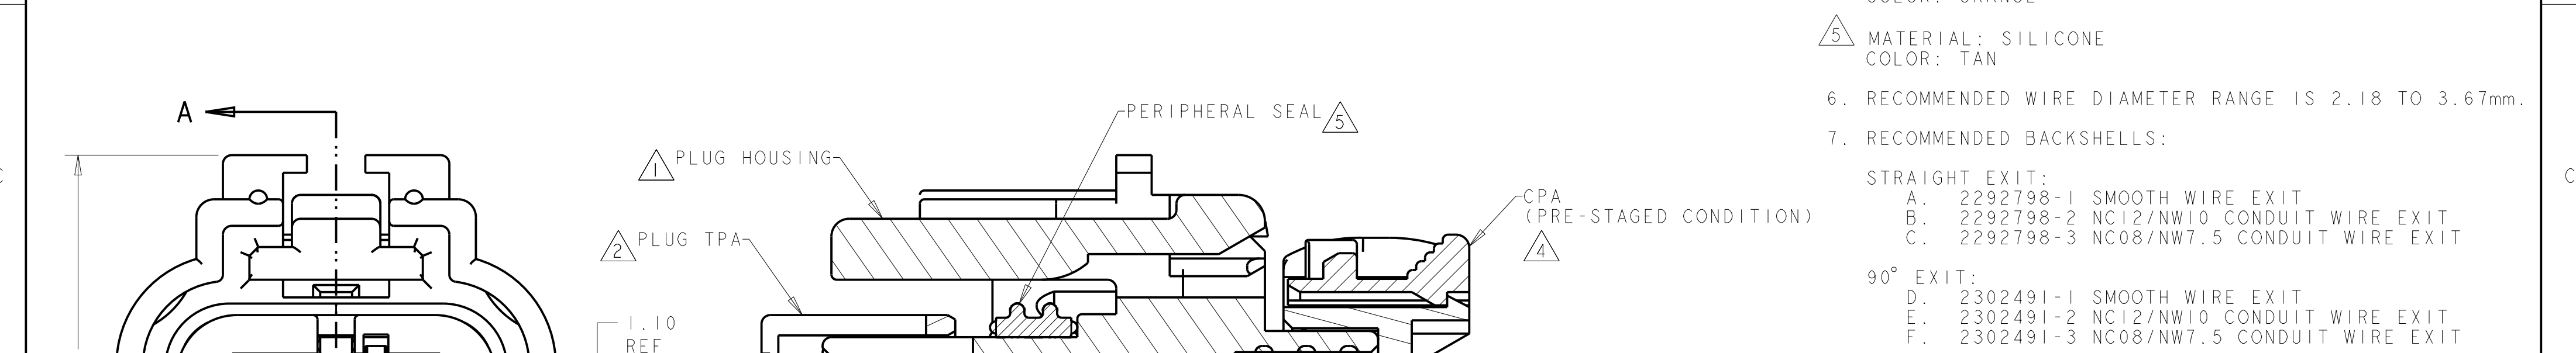

- 1 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: GRAY

2 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: (SEE TABLE)

3 MATERIAL: SILICONE
COLOR: GREEN

4 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: ORANGE

5 MATERIAL: SILICONE
COLOR: TAN

6. RECOMMENDED WIRE DIAMETER RANGE IS 2.18 TO 3.67mm.


7. RECOMMENDED BACKSHELLS:

STRAIGHT EXIT:
A. 2292798-1 SMOOTH WIRE EXIT
B. 2292798-2 NC12/NW10 CONDUIT WIRE EXIT
C. 2292798-3 NC08/NW7.5 CONDUIT WIRE EXIT

90° EXIT:
D. 2302491-1 SMOOTH WIRE EXIT
E. 2302491-2 NC12/NW10 CONDUIT WIRE EXIT
F. 2302491-3 NC08/NW7.5 CONDUIT WIRE EXIT

8. RECOMMENDED SEAL PLUG: 776363-1

9. MATING CONNECTOR: 2320914-X.
-

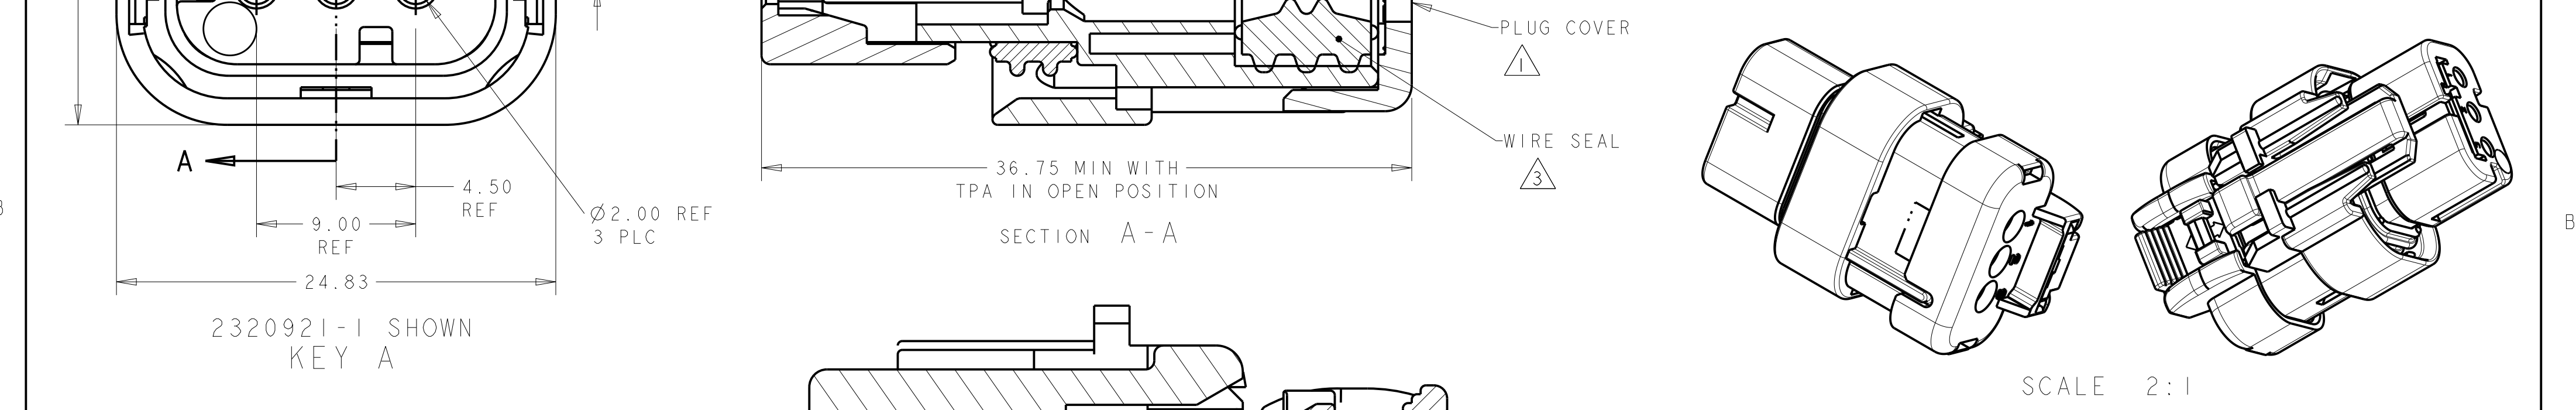

D	ORANGE	2320921-4
C	PURPLE	2320921-3
B	BLUE	2320921-2
A	TAN	2320921-1
KEY	TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	
1 PLC	±	
2 PLC	±0.30	
3 PLC	±	
4 PLC	±	
ANGLES	±1°	
FINISH	-	

MATERIAL

-	-
-	-

DWN J MCNEAL 17JAN2018

CHK R BALTER 17JAN2018

APVD R BALTER 17JAN2018

PRODUCT SPEC 108-32602

APPLICATION SPEC 114-32362

WEIGHT 8g

CUSTOMER DRAWING

TE Connectivity

NAME PLUG ASSEMBLY, 3 POSITION, STD DIA SEAL, HIGH TEMP, AMPSEAL 16

SIZE A2

CAGE CODE -

DRAWING NO C-2320921

RESTRICTED TO -

SCALE 4:1 SHEET OF REV A