


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE	08APR2021	MK	BC

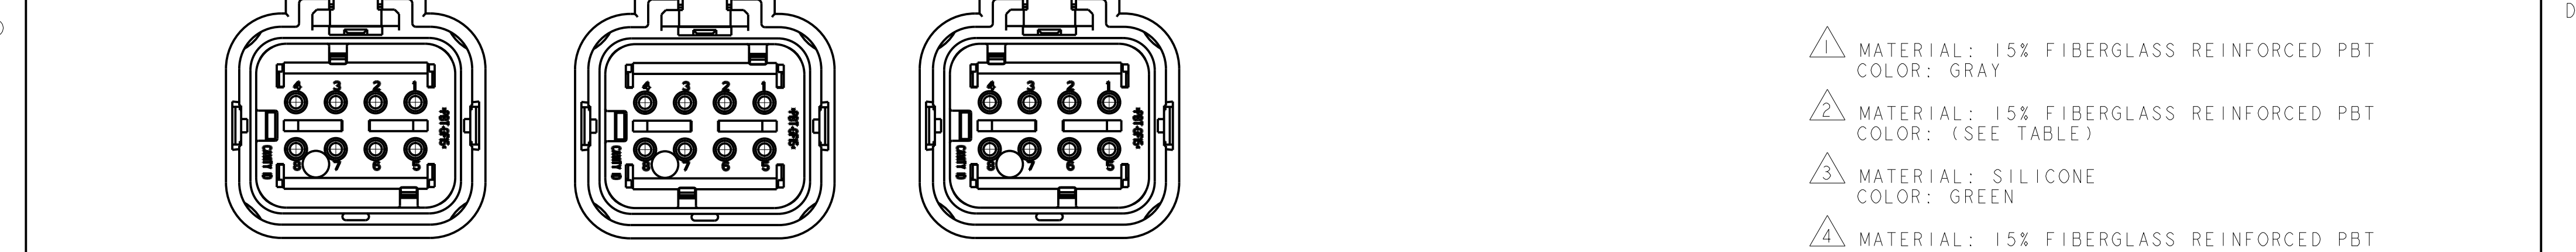


2320924-2
SCALE 2:1
KEY B

2320924-3
SCALE 2:1
KEY C

2320924-4
SCALE 2:1
KEY D

- 1 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: GRAY
- 2 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: (SEE TABLE)
- 3 MATERIAL: SILICONE
COLOR: GREEN
- 4 MATERIAL: 15% FIBERGLASS REINFORCED PBT
COLOR: ORANGE
- 5 MATERIAL: SILICONE
COLOR: TAN
6. RECOMMENDED WIRE DIAMETER RANGE IS 2.18 TO 3.67mm.
7. RECOMMENDED BACKSHELLS:
STRAIGHT EXIT:
A. 2292801-1 SMOOTH WIRE EXIT
B. 2292801-2 NC20/NW17 CONDUIT WIRE EXIT
C. 2292801-3 NC16/NW13 CONDUIT WIRE EXIT
90° EXIT:
D. 2302494-1 SMOOTH WIRE EXIT
E. 2302494-2 NC20/NW17 CONDUIT WIRE EXIT
F. 2302494-3 NC16/NW13 CONDUIT WIRE EXIT

8. RECOMMENDED SEAL PLUG: 776363-1
9. MATING CONNECTOR: 2320917-X.

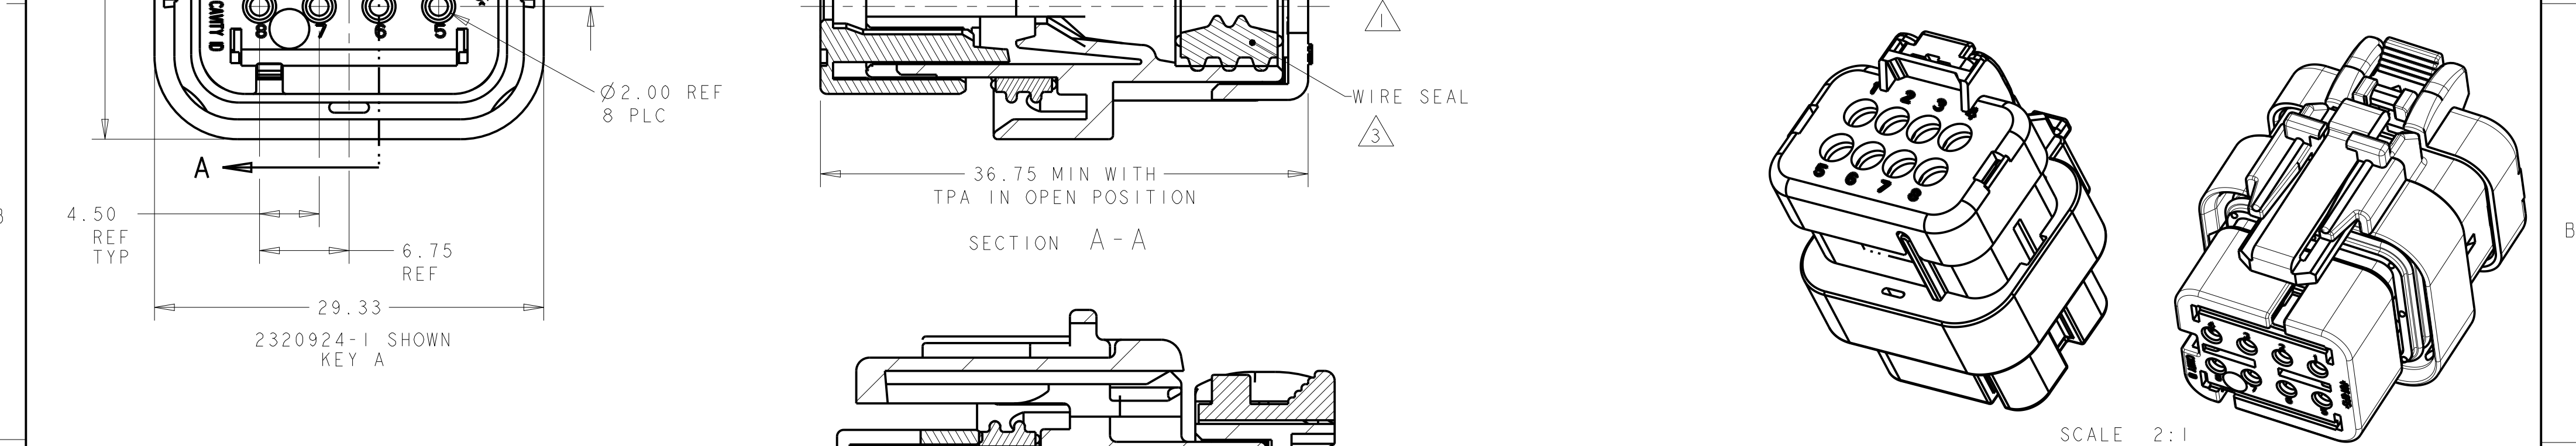

SECTION A-A
36.75 MIN WITH
TPA IN OPEN POSITION

SECTION A-A
34.25 WITH
TPA IN CLOSED POSITION

D	ORANGE	2320924-4
C	PURPLE	2320924-3
B	BLUE	2320924-2
A	TAN	2320924-1
KEY	TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±
FINISH -

DWN J MCNEAL 18SEP2018
CHK R BALTER 18SEP2018
APVD R BALTER 18SEP2018

PRODUCT SPEC
108-32602
APPLICATION SPEC
114-32362
WEIGHT 16±1g

CUSTOMER DRAWING

TE Connectivity

NAME
PLUG ASSEMBLY, 8 POSITION
STD DIA SEAL, HIGH TEMP, AMPSEAL 16

SIZE A2
CAGE CODE -
DRAWING NO C-2320924
RESTRICTED TO

SCALE 1:1
SHEET 1 OF 1
REV A

1471-9 (3/13)