



P	LTR	DESCRIPTION	DATE	DWN	APVD
	B3	REVISED PER ECO-11-005030	11MAR2011	RK	HMR
	C	REVISED PER ECO-13-019231	09DEC2013	DR	RB
	C1	REVISED PER PCN-23-190965	31OCT2023	AP	CB


D

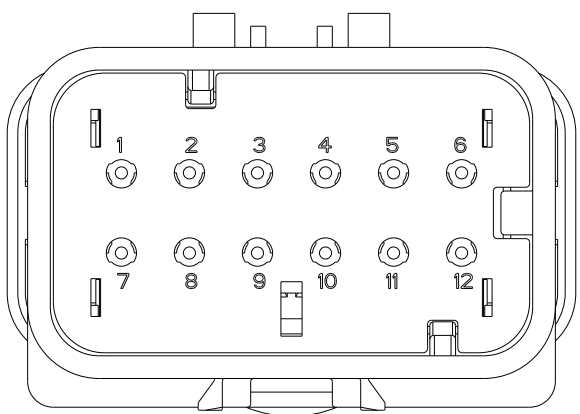

776539-2
SCALE 2:1

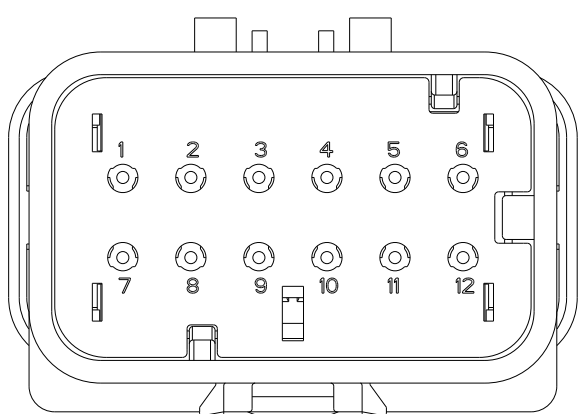

776539-3
SCALE 2:1

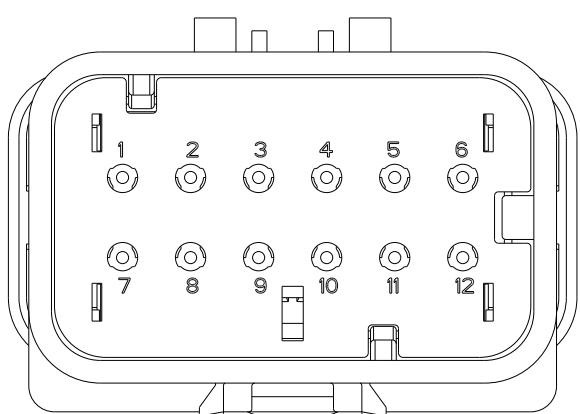


776539-4
SCALE 2:1


- 1 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: BLACK
- 2 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: (SEE TABLE)
- 3 MATERIAL: SILICONE
COLOR: RUST

4. RECOMMENDED WIRE DIAMETER RANGE IS 1.30 TO 2.54mm


C

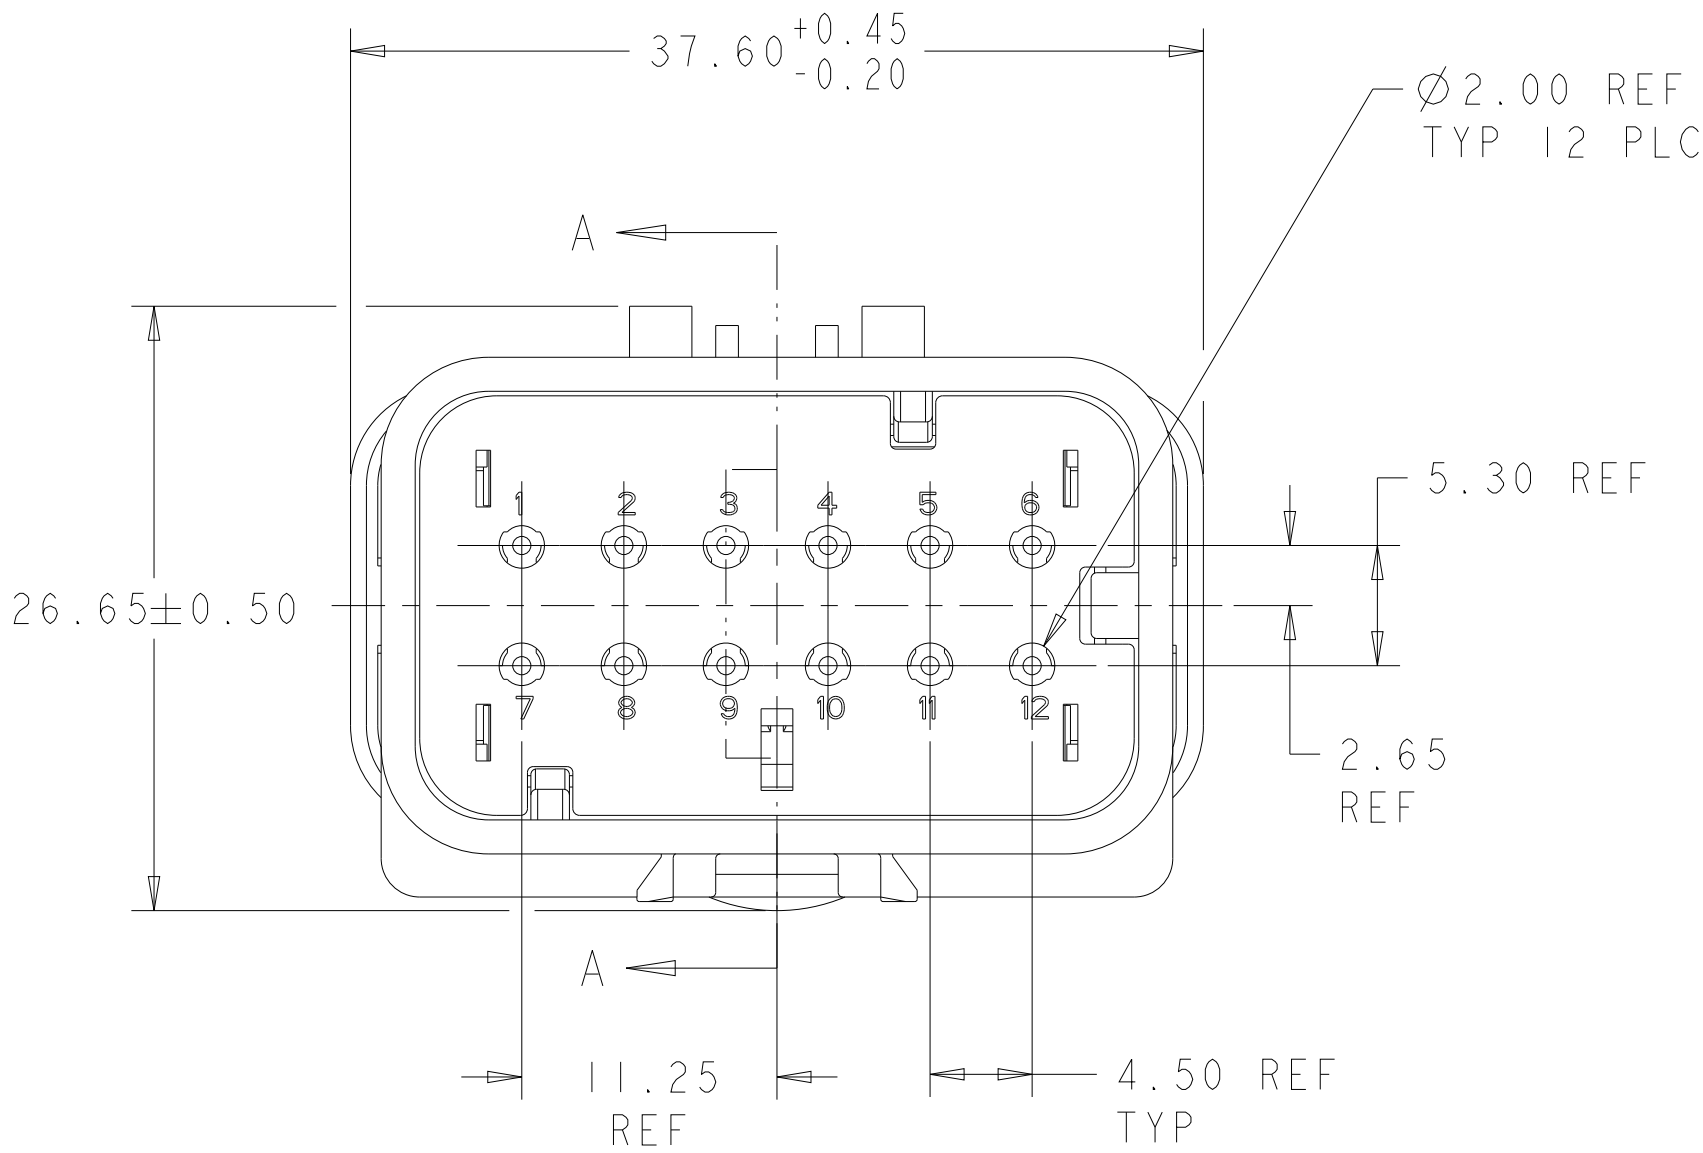

776539-1 SHOWN

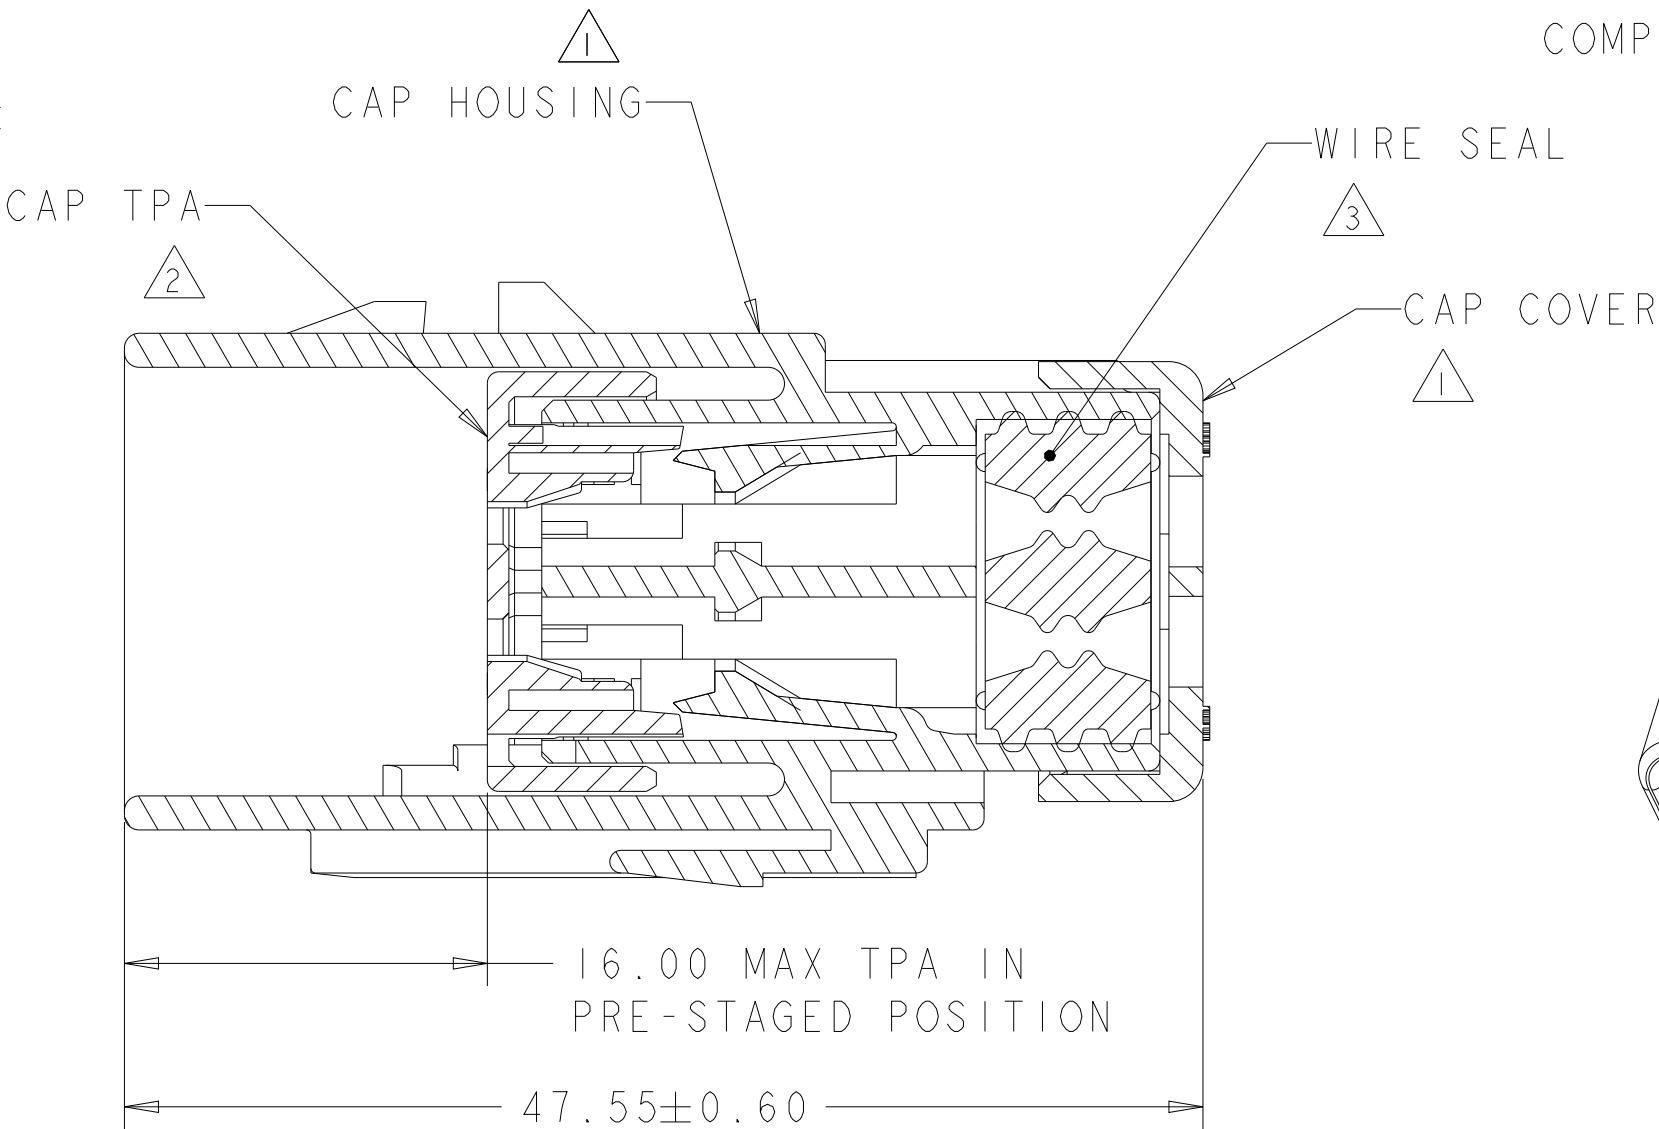

SECTION A-A

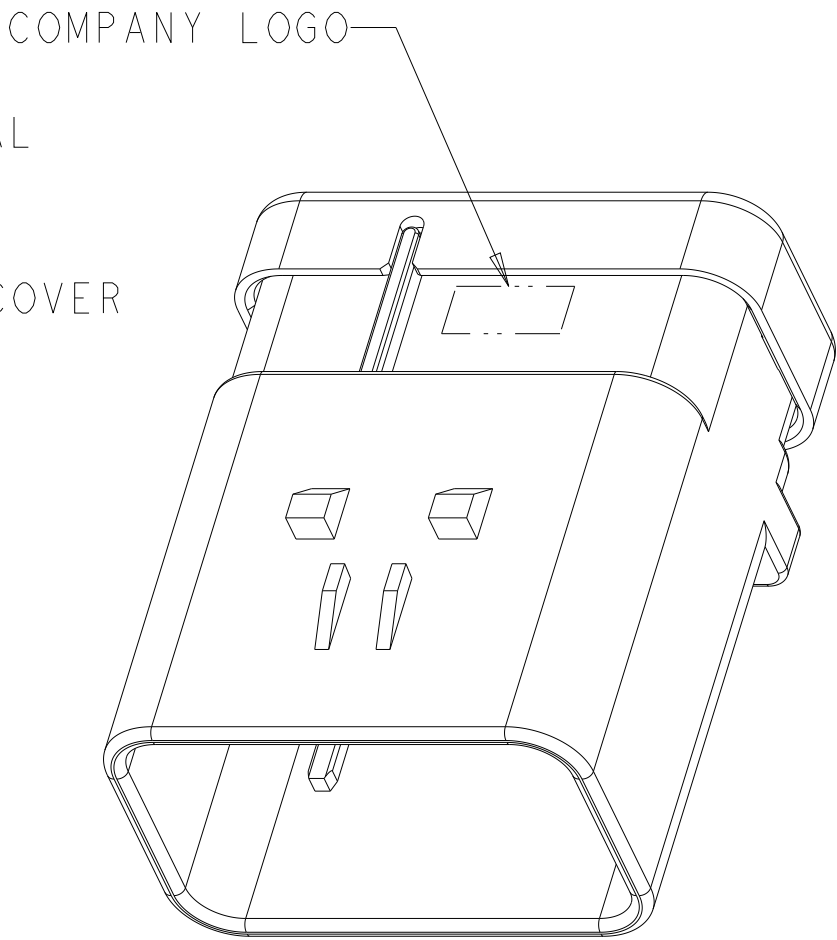

GREEN	776539-4
YELLOW	776539-3
GRAY	776539-2
RED	776539-1
TPA COLOR	PART NUMBER

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN W. HOELSCHER CHK J. PATTERSON APVD D. KLEIN	04SEP2003 04SEP2003 04SEP2003	TE Connectivity		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME CAP ASSEMBLY, 12 POSITION, 2 ROW, AMPSEAL 16 CONNECTOR REDUCED DIA WIRE SEAL		
		0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES FINISH	± ± ± ± ± ± ±	PRODUCT SPEC 108-2184 APPLICATION SPEC 114-13065 WEIGHT 22.5	SIZE A200779	CAGE CODE C-776539
MATERIAL - -				RESTRICTED TO - Customer Drawing		
				SCALE 2:1	SHEET 1 OF 1	REV C1