

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED PER ECO-13-019067	05DEC2013	DR	RB
	D1	REVISED PER PCN-23-190965	31OCT2023	AP	CB
	D2	REVISED PER PCN-23-190965	07NOV2023	AP	CB


- 1

MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: BLACK
- 2


MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: (SEE TABLE)
- 3

MATERIAL: SILICONE
COLOR: LIGHT GRAY
4. RECOMMENDED WIRE DIAMETER RANGE IS 1.30 TO 2.54mm


D



776534-2
SCALE 2:1
KEY B




776534-3
SCALE 2:1
KEY C




776534-4
SCALE 2:1
KEY D


C

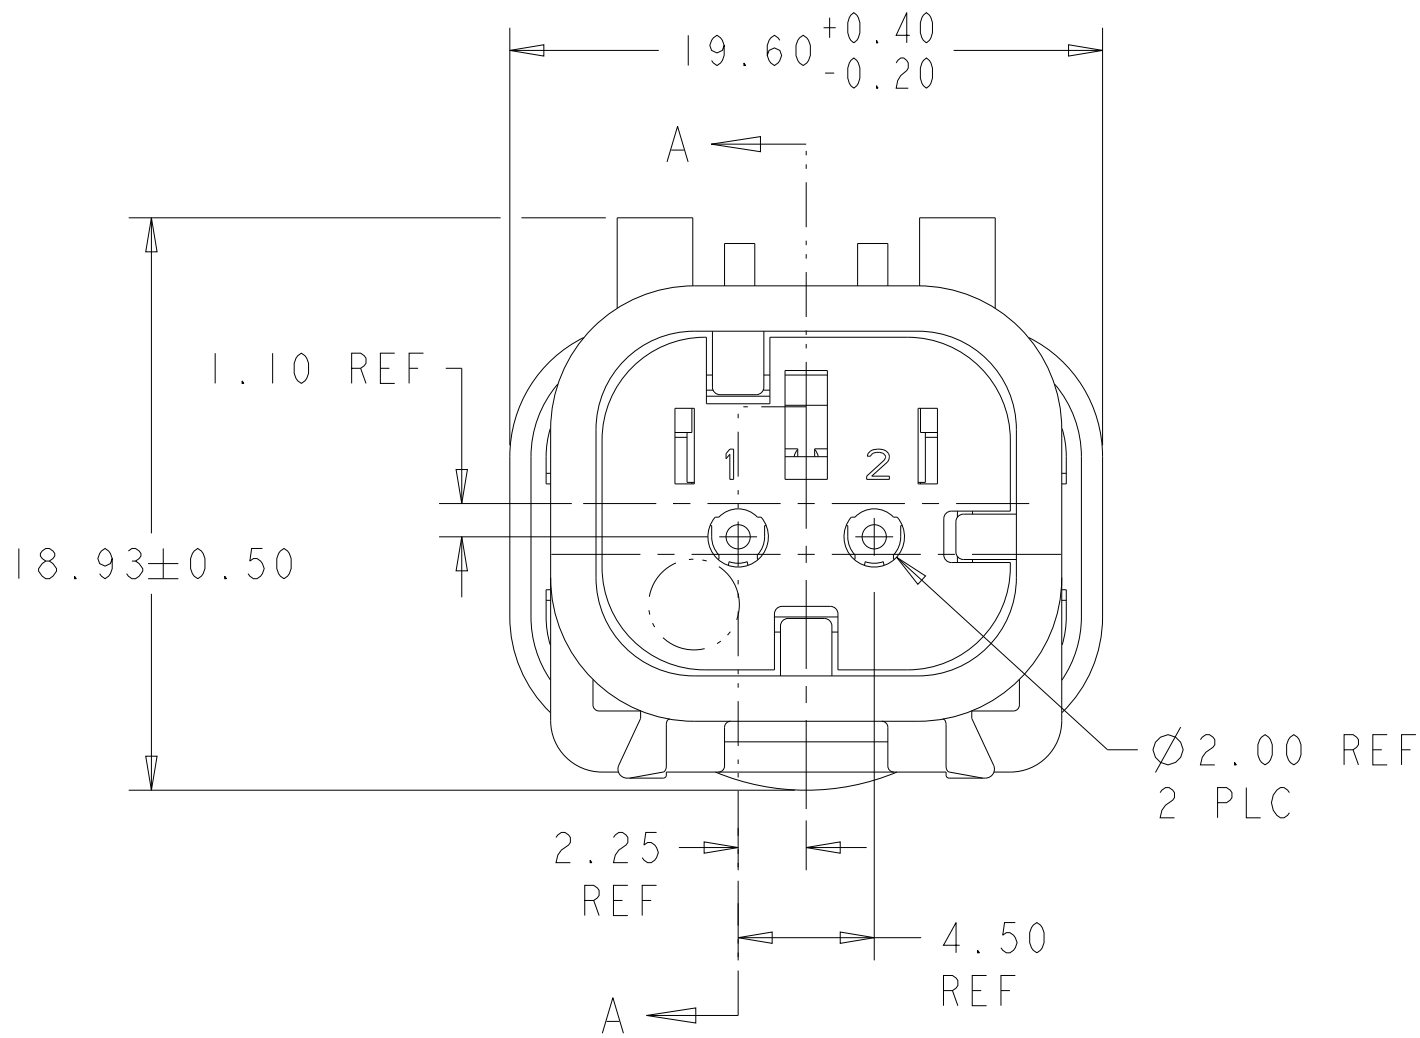


776534-1 SHOWN
KEY A

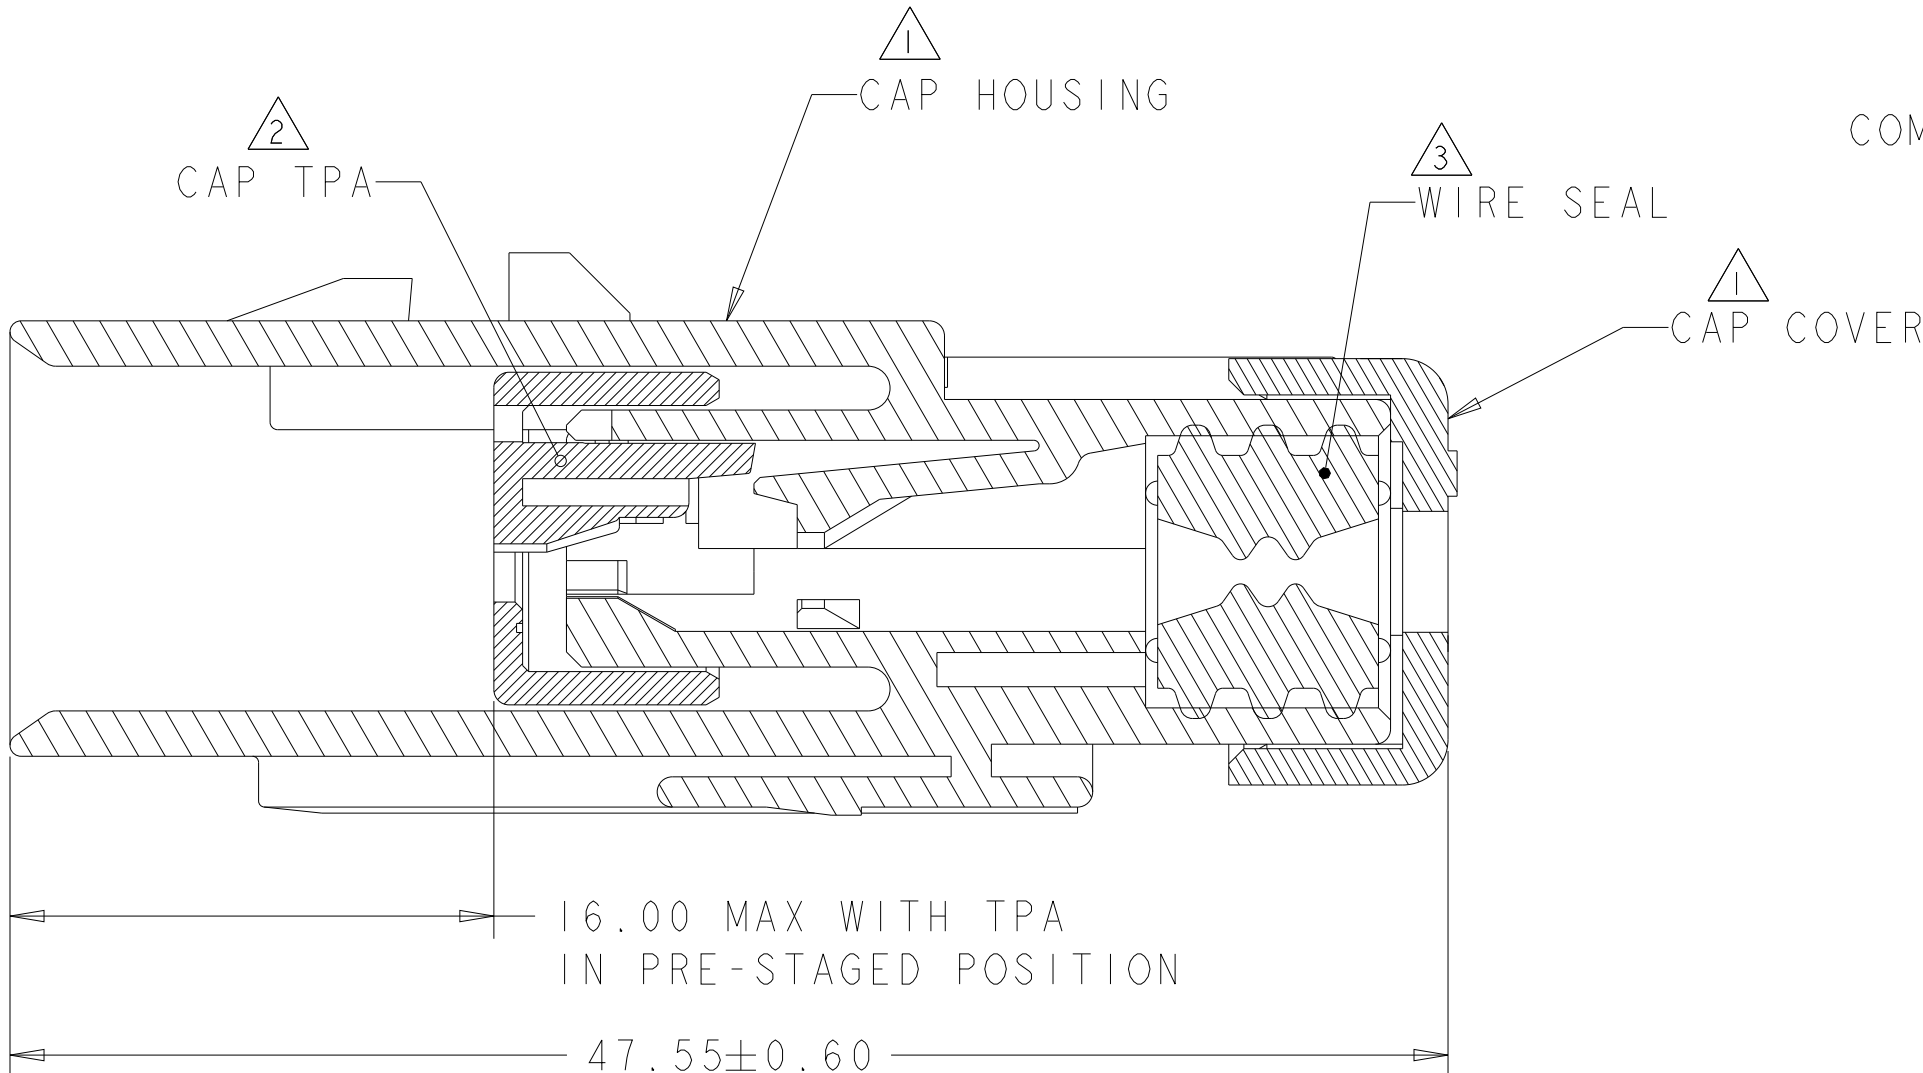

SECTION A-A

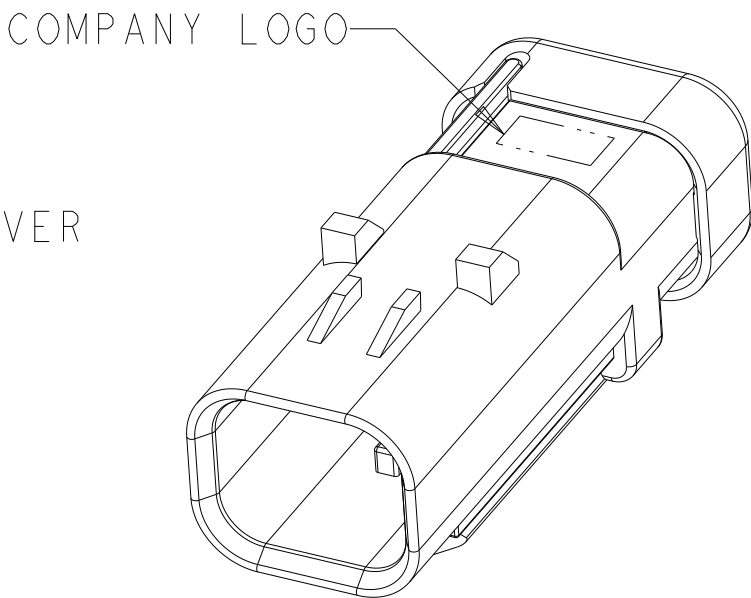


SCALE 2:1

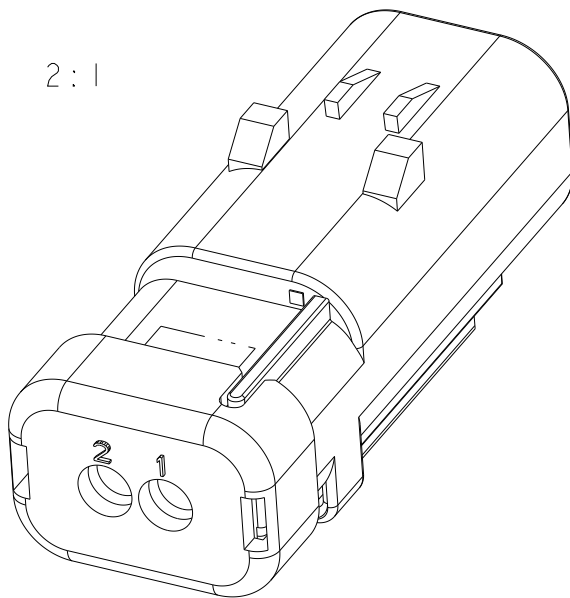

SCALE 2:1

B

A

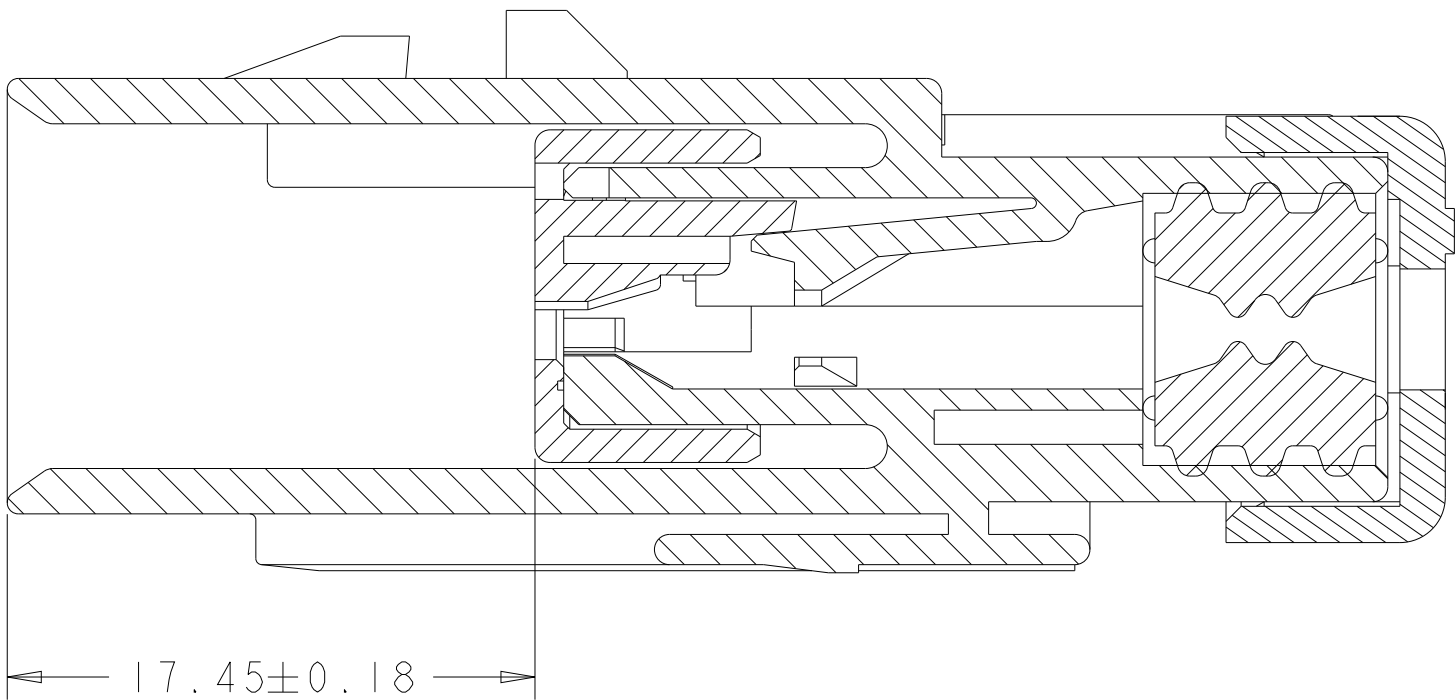

SECTION A-A
WITH TPA IN CLOSED POSITION

D	GREEN	776534-4
C	YELLOW	776534-3
B	GRAY	776534-2
A	RED	776534-1
KEY	TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN Y. PETERSON 22FEB00 CHK R. GREINER 11DEC01 APVD M. TRULL 11DEC01		 TE Connectivity		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
		0 PLC ±-		CAP ASSEMBLY, 2 POSITION, SINGLE ROW, REDUCED DIA WIRE SEAL, AMPSEAL 16			
		1 PLC ±-					
		2 PLC ±-					
		3 PLC ±-		SIZE CAGE CODE DRAWING NO RESTRICTED TO			
		4 PLC ±-					
MATERIAL		ANGLES ±-					
FINISH							
-		-		WEIGHT			
-		-		9			
Customer Drawing				A200779		C=776534	
				SCALE		SHEET	
				4:1		1 OF 1	
						REV D2	