



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER ECO-13-019095	05DEC2013	DR	RB
	C1	REVISED PER PCN-23-190965	31OCT2023	AP	CB


D

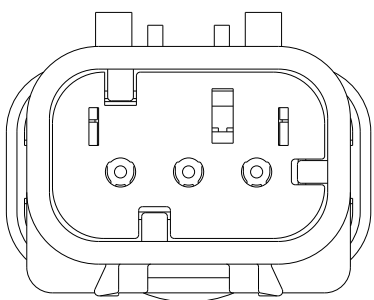

776535-2
SCALE 2:1
KEY B

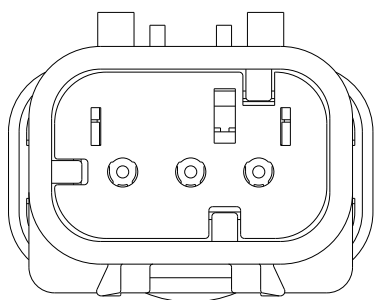

776535-3
SCALE 2:1
KEY C

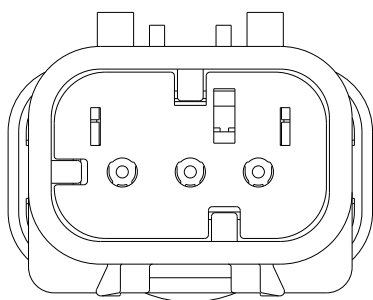

776535-4
SCALE 2:1
KEY D


1 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: BLACK

2 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: (SEE TABLE)


3 MATERIAL: SILICONE
COLOR: RUST

4. RECOMMENDED WIRE DIAMETER RANGE IS 1.30 TO 2.54mm

C

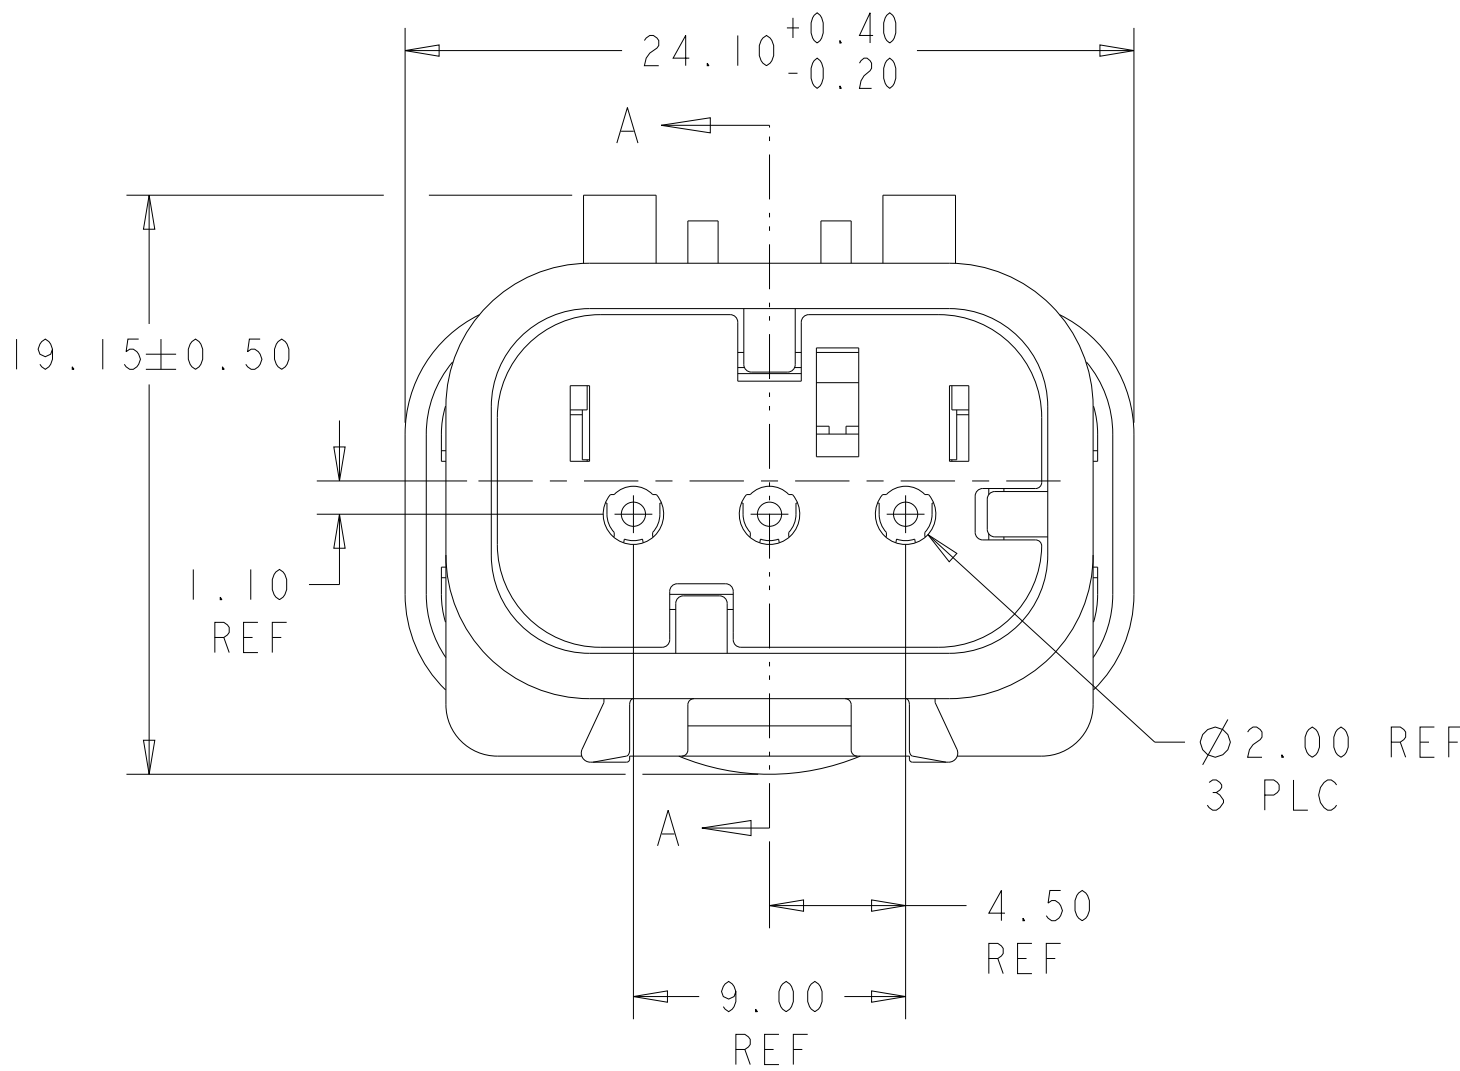


776535-1 SHOWN
KEY A

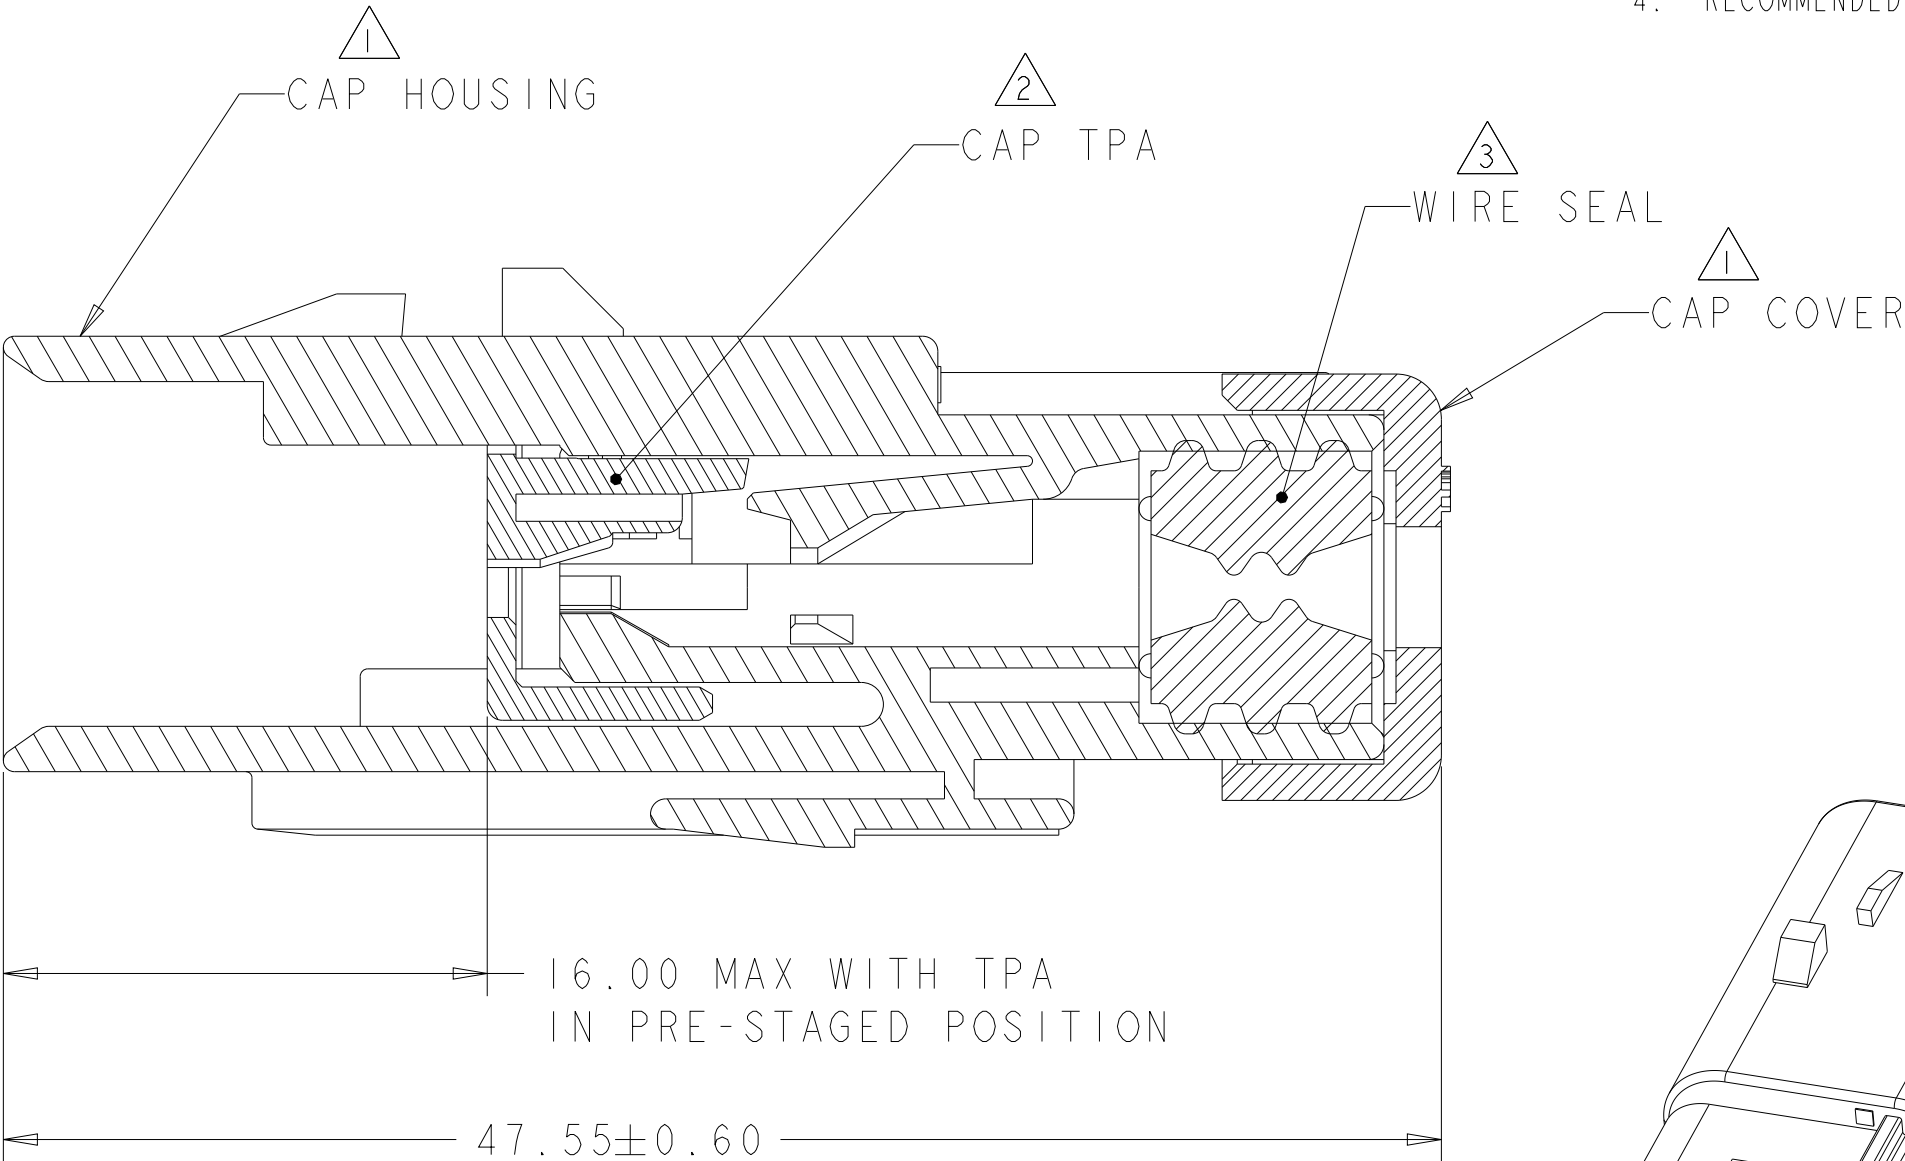


SECTION A-A

COMPANY LOGO

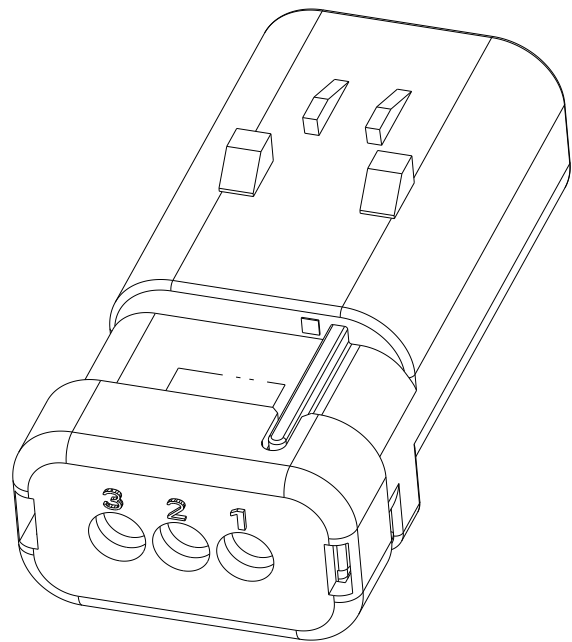


SCALE 2:1

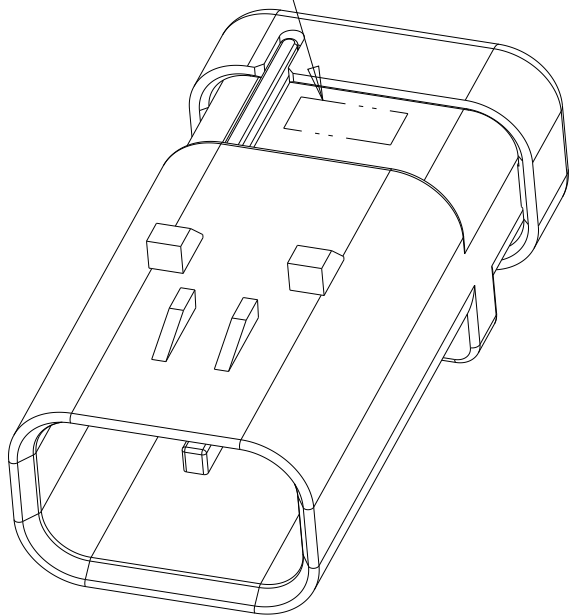

SCALE 2:1

B

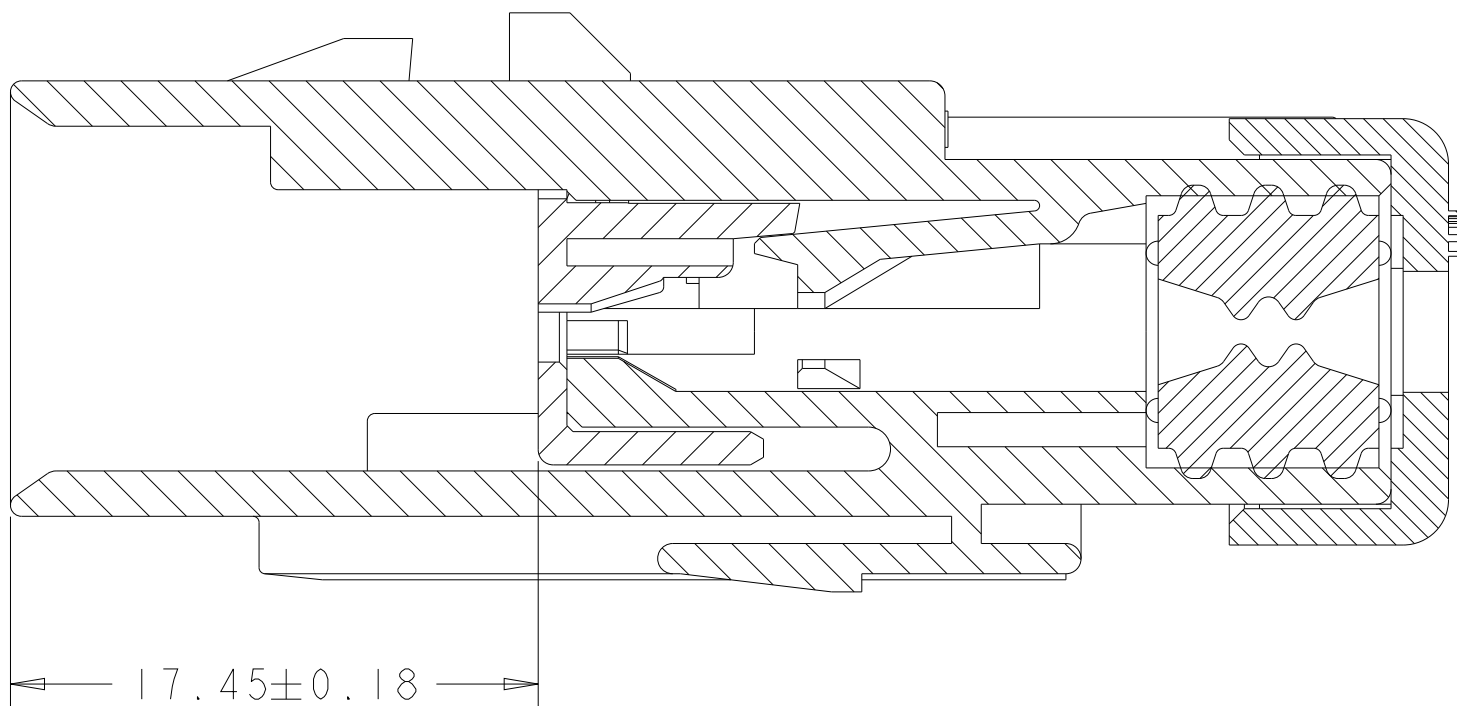

SECTION A-A
WITH TPA IN CLOSED POSITION

D	GREEN	776535-4
C	YELLOW	776535-3
B	GRAY	776535-2
A	RED	776535-1
KEY	TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Y. PETERSON 22FEB00	TE Connectivity			
		CHK R. GREINER 11DEC01				
DIMENSIONS:		APVD M. TRULL 11DEC01	NAME			
mm		PRODUCT SPEC				
		108-2184	CAP ASSEMBLY, 3 POSITION, SINGLE ROW, REDUCED DIA WIRE SEAL AMPSEAL 16			
		APPLICATION SPEC				
		114-13065	SIZE CAGE CODE DRAWING NO RESTRICTED TO			
MATERIAL		WEIGHT 10				
		Customer Drawing	A200779C-776535			
			SCALE 4:1 SHEET 1 OF 1 REV C1			

A