



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER ECO-13-019168	05DEC2013	DR	RB
	C1	REVISED PER PCN-23-190965	31OCT2023	AP	CB

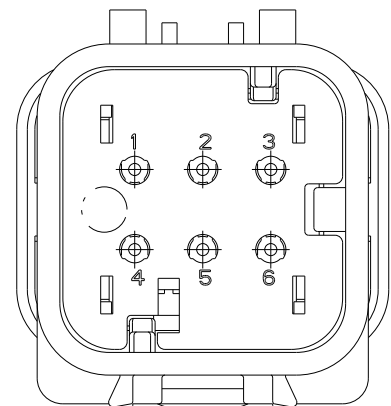

776537-2
SCALE 2:1

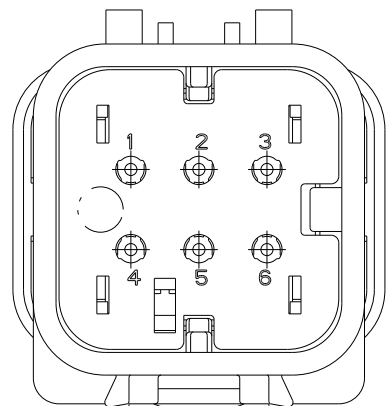


776537-3
SCALE 2:1

1 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: BLACK


2 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: (SEE TABLE)

3 MATERIAL: SILICONE
COLOR: LIGHT GRAY


4. RECOMMENDED WIRE DIAMETER RANGE IS 1.30
TO 2.54mm

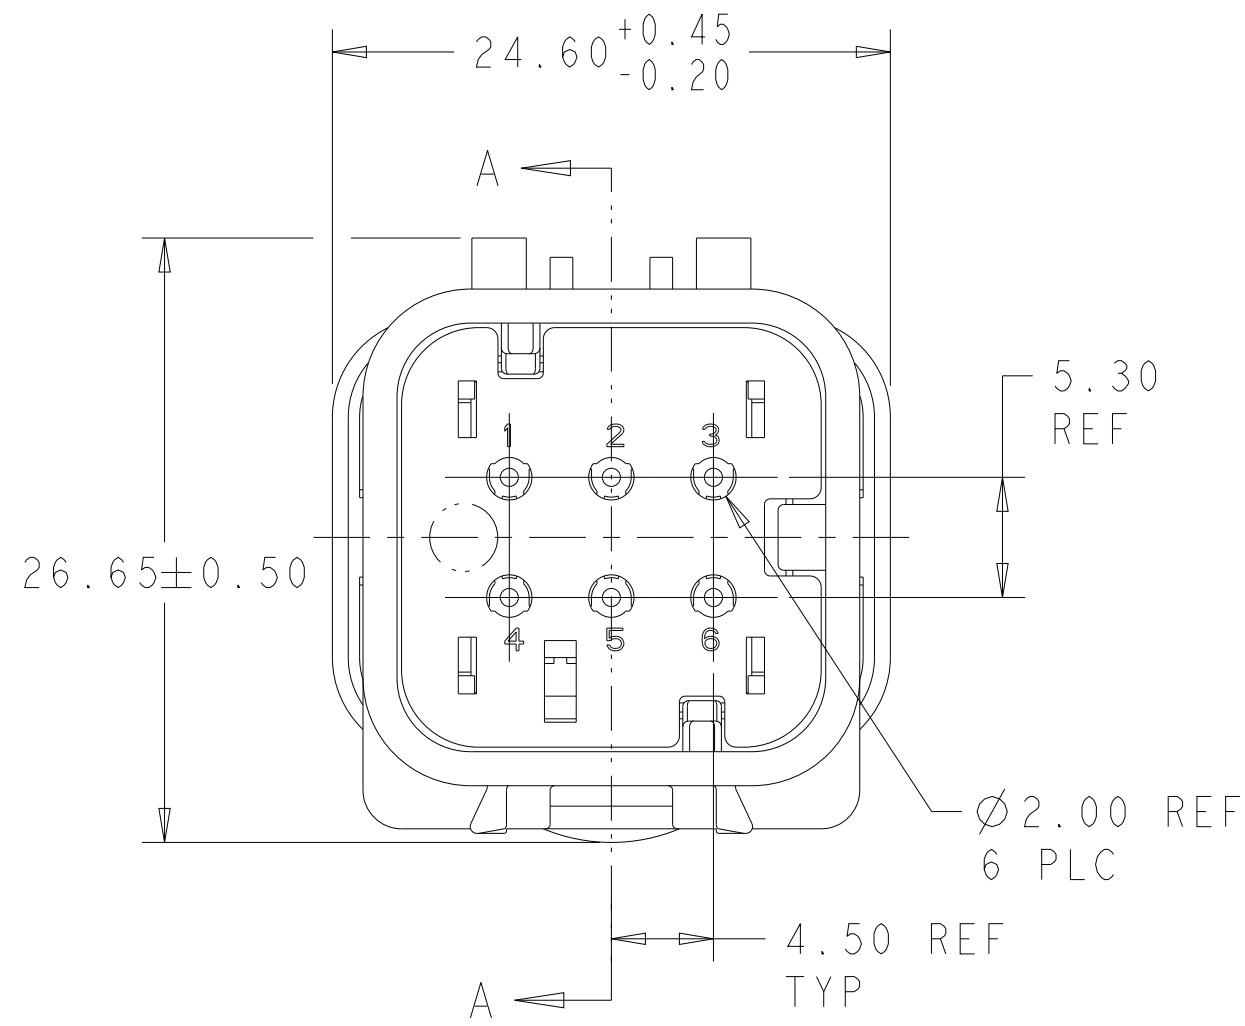

776537-1 SHOWN

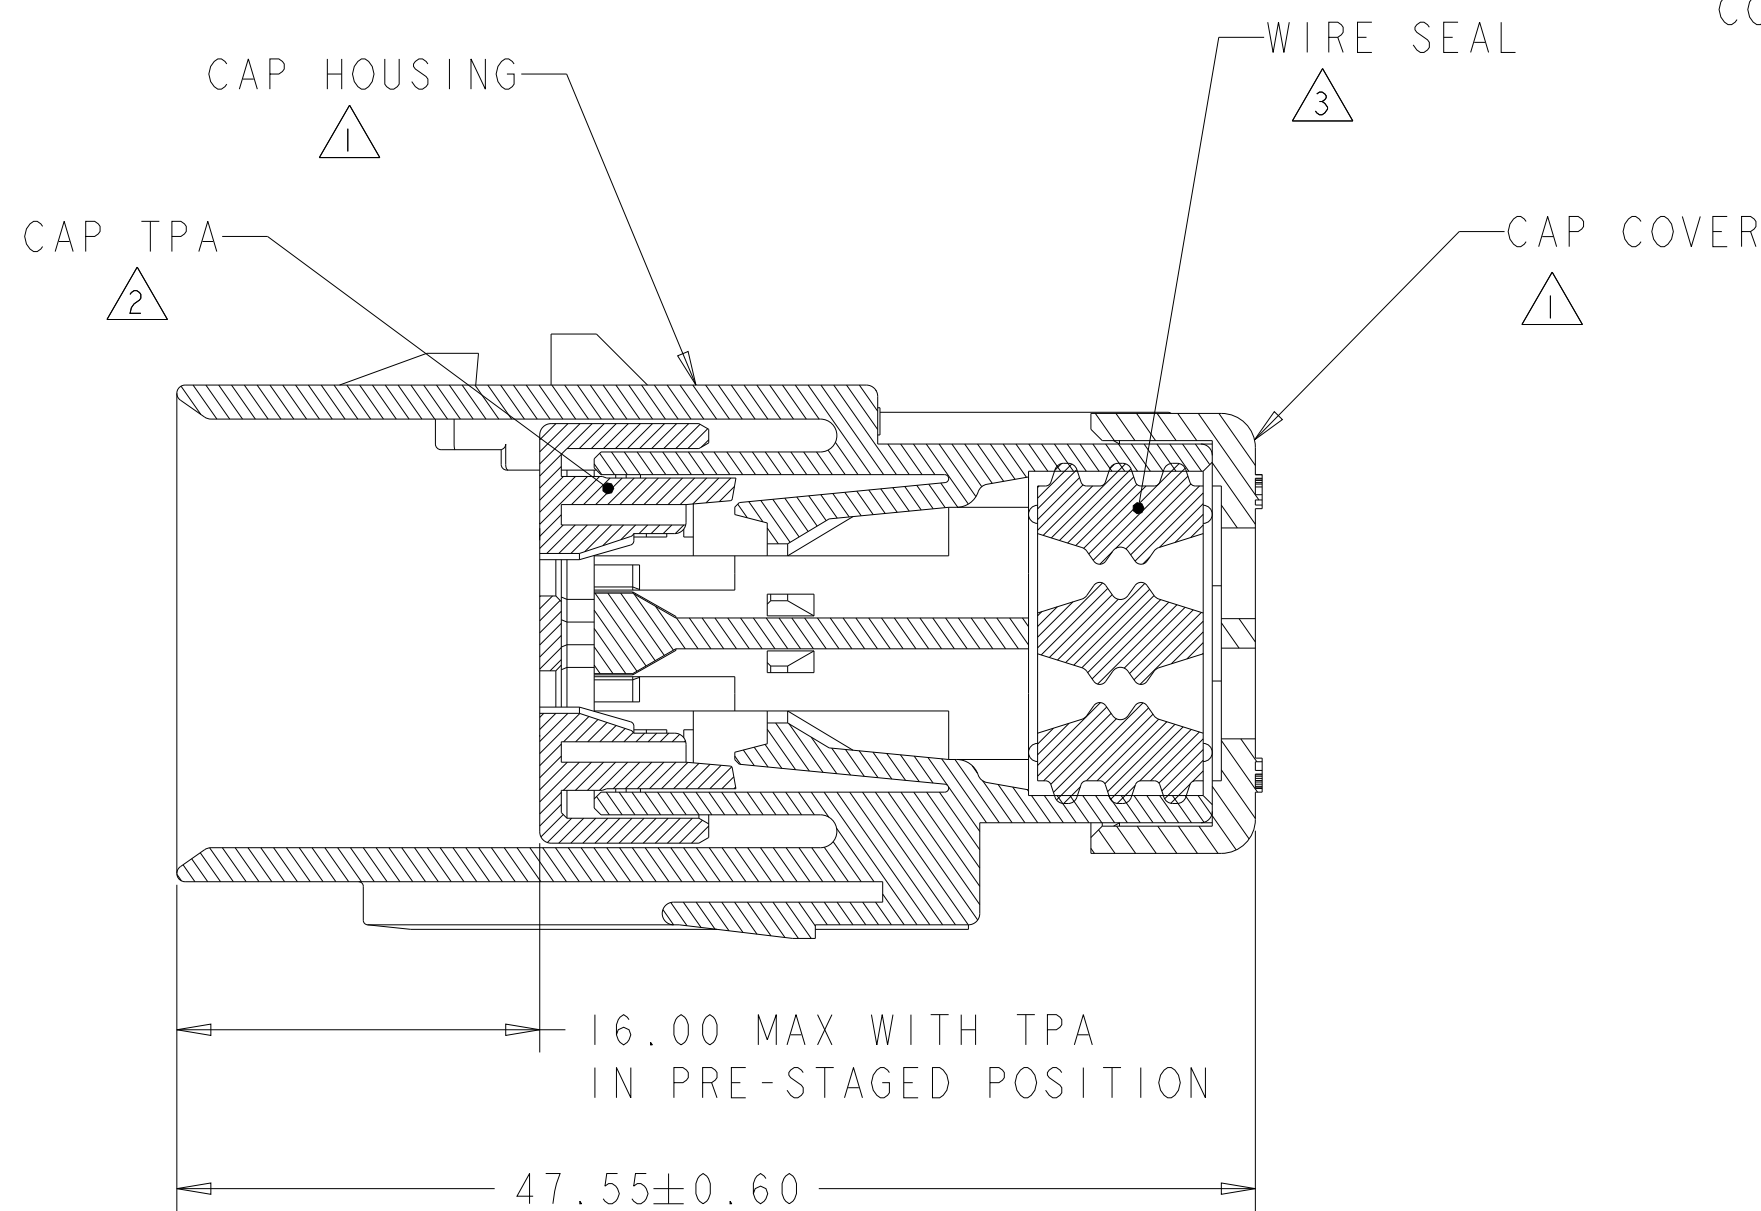

SECTION A-A
OPEN POSITION

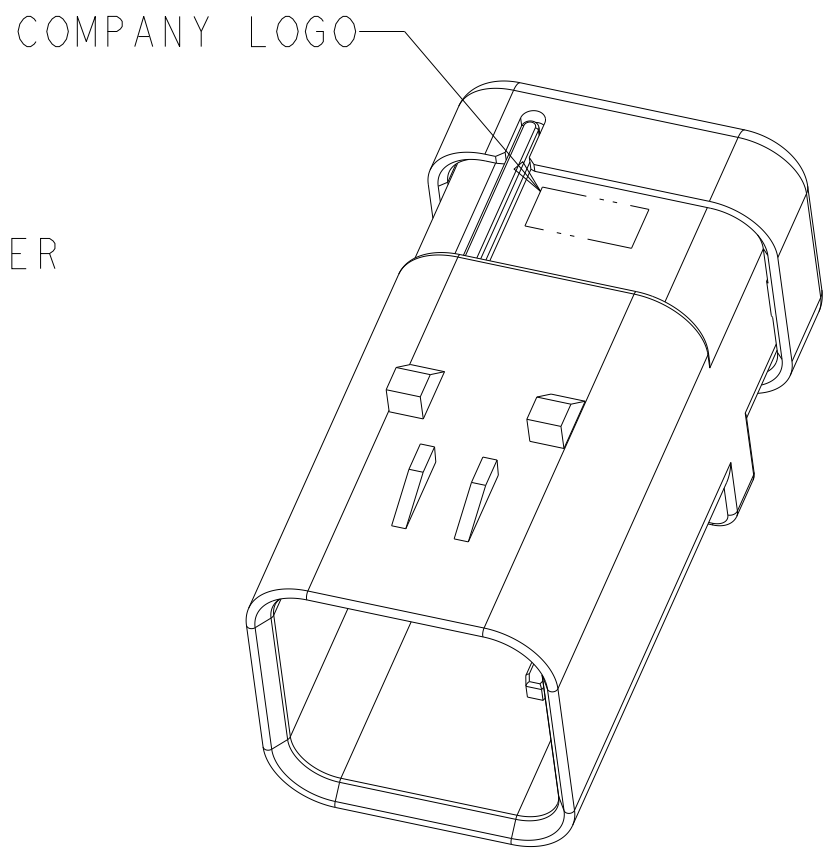

SCALE 2:1

YELLOW	776537-3
GRAY	776537-2
RED	776537-1
TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 04SEP2003 W. HOELSCHER	TE Connectivity			
DIMENSIONS:		CHK 04SEP2003 J. PATTERSON				
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD 04SEP2003 D. KLEIN	NAME			
	0 PLC ±	PRODUCT SPEC	CAP ASSEMBLY, 6 POSITION, 2 ROW, AMPSEAL 16 CONNECTOR REDUCED DIA WIRE SEAL			
	1 PLC ±	108-2184				
	2 PLC ±	APPLICATION SPEC				
	3 PLC ±	114-13065				
	4 PLC ±	WEIGHT				
	ANGLES ±	15.5				
MATERIAL	FINISH	Customer Drawing	SIZE A2	CAGE CODE 00779	DRAWING NO C-776537	RESTRICTED TO -
-	-		SCALE 2:1	SHEET 1	OF 1	REV C1