



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	REVISED PER ECO-13-019067	05DEC2013	DR	RB


D

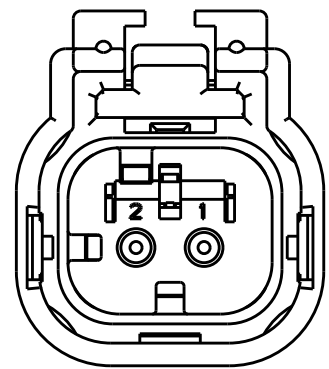

776522-2
SCALE 2:1
KEY B

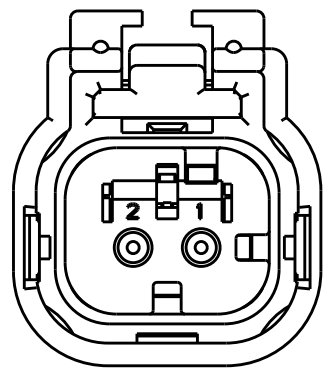

776522-3
SCALE 2:1
KEY C

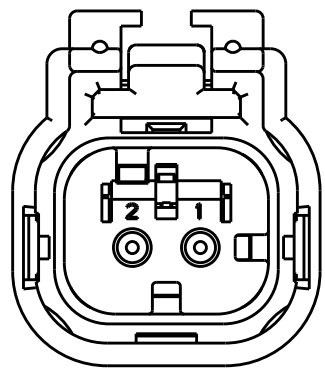

776522-4
SCALE 2:1
KEY D

- 1

MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: BLACK
- 2

MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: (SEE TABLE)
- 3

MATERIAL: SILICONE
COLOR: LIGHT GRAY
- 4


MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: RED
- 5

RECOMMENDED WIRE DIAMETER RANGE IS 1.30 TO 2.54mm.
- 6


MATERIAL: SILICONE
COLOR: BLUE

D


C

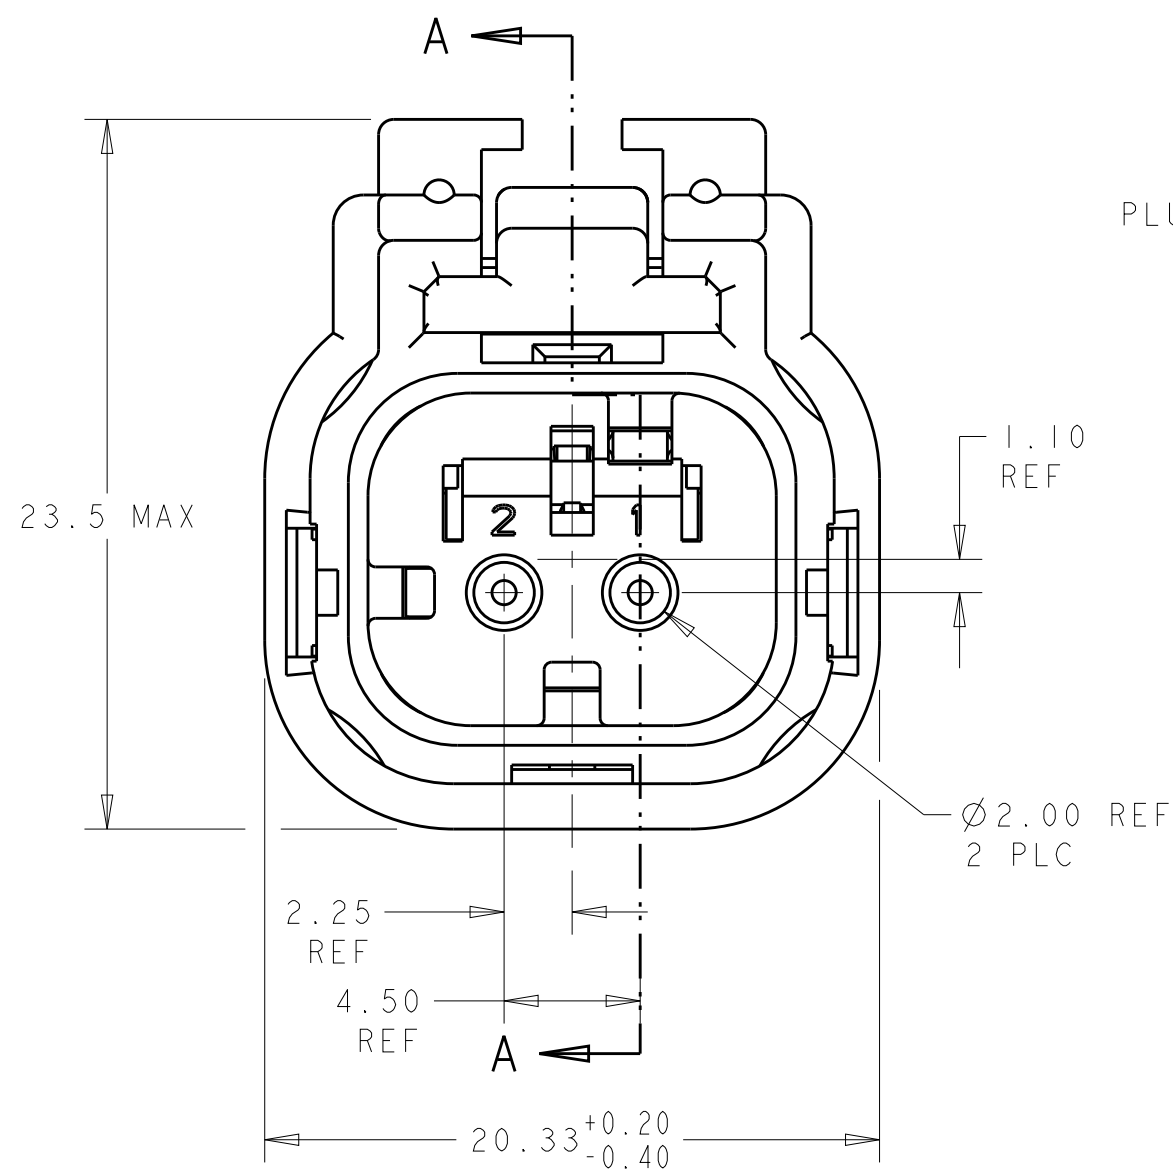

776522-1 SHOWN
KEY A

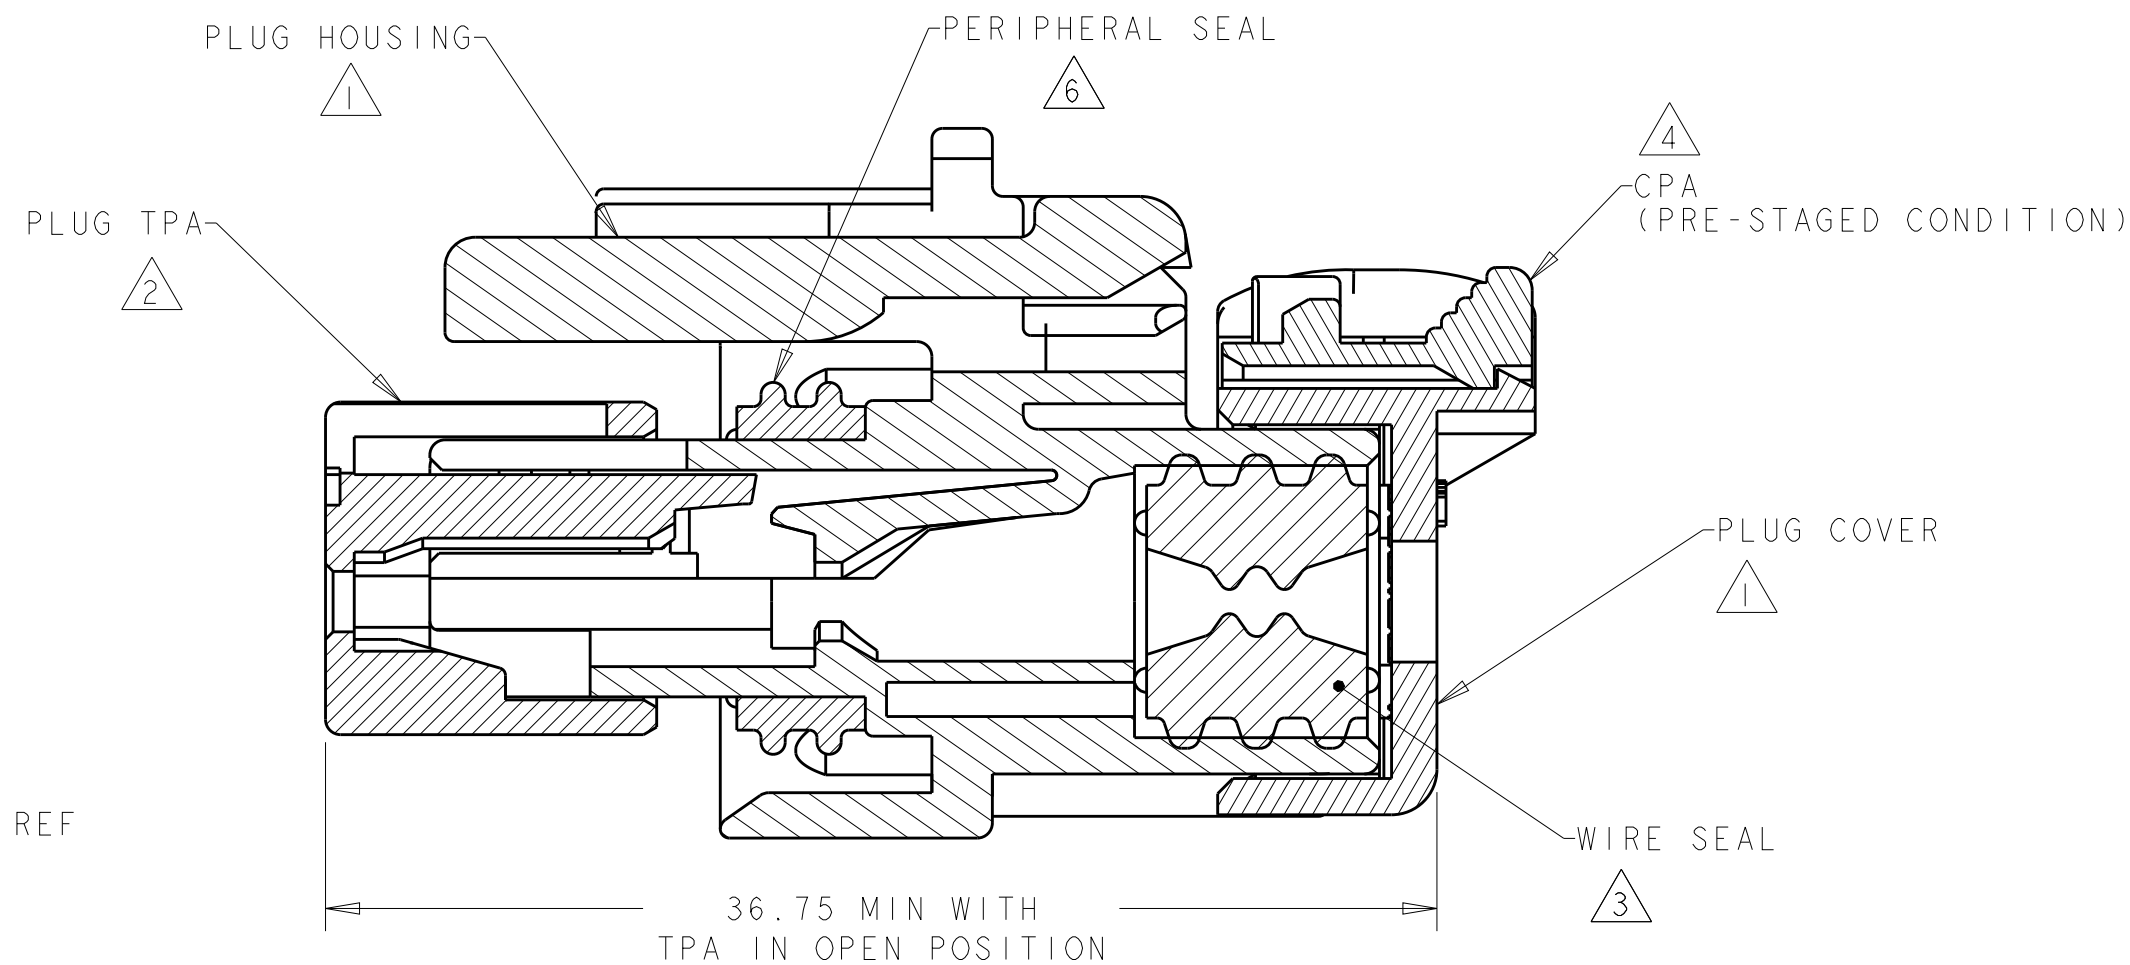


SECTION A-A

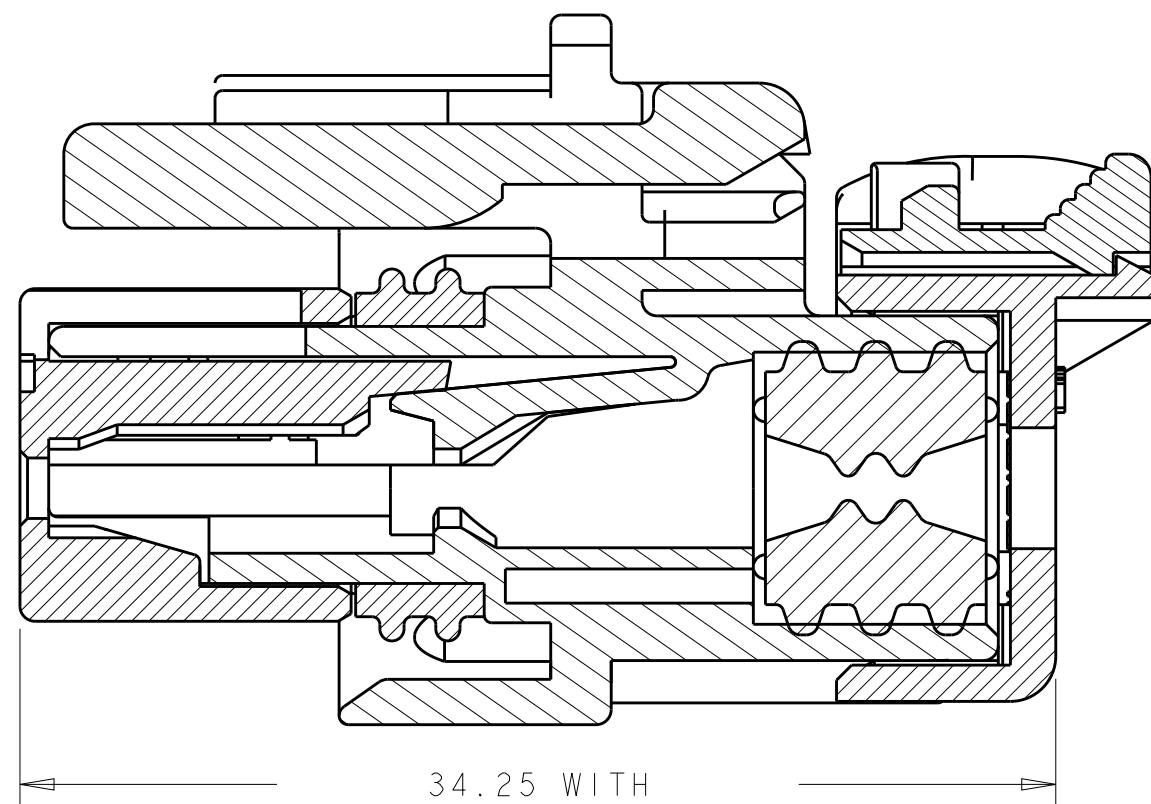


34.25 WITH
TPA IN CLOSED POSITION

SECTION A-A

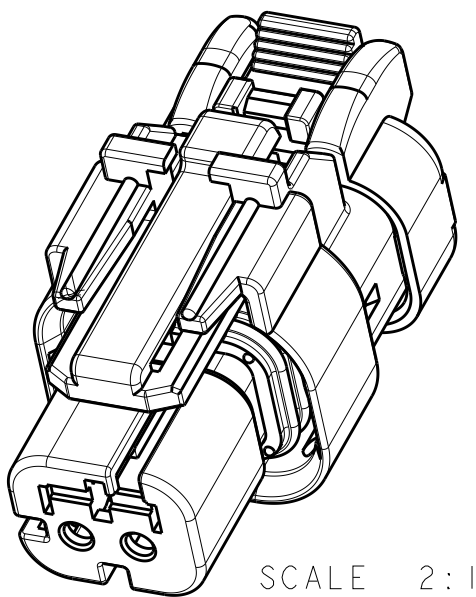

SCALE 2:1

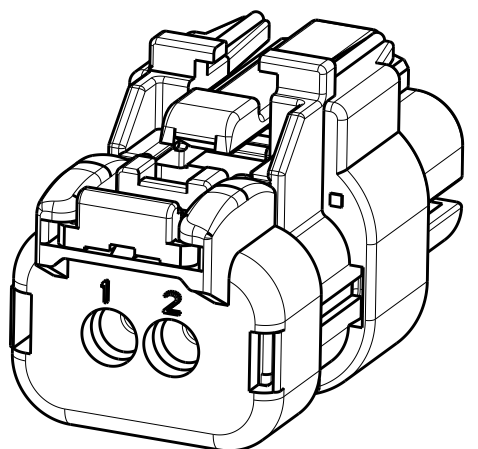

SCALE 2:1

D	GREEN	776522-4
C	YELLOW	776522-3
B	GRAY	776522-2
A	RED	776522-1
KEY	TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN AJ GRAFF	22FEB00	TE Connectivity		
DIMENSIONS:		CHK R. GREINER	11DEC01			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. TRULLI	11DEC01	NAME		
mm		PRODUCT SPEC		PLUG ASSEMBLY, 2 POSITION, SINGLE ROW REDUCED DIA WIRE SEAL, AMPSEAL 16		
0 PLC ±		108-2184		SIZE		
1 PLC ±		APPLICATION SPEC		CAGE CODE		
2 PLC ±		114-13065		DRAWING NO		
3 PLC ±		WEIGHT		RESTRICTED TO		
4 PLC ±		8		A200779C-776522		
ANGLES ±		Customer Drawing		SCALE 4:1		
FINISH				SHEET OF		
				REV E		

A

A