




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	REVISED PER ECO-13-019095	05DEC2013	DR	RB

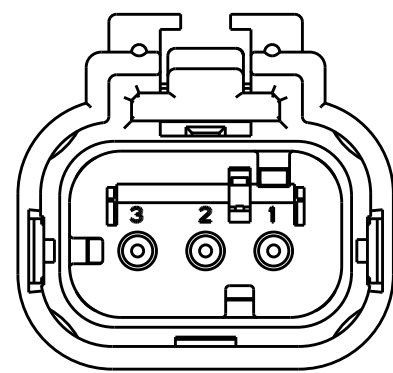

776523-2
SCALE 2:1
KEY B

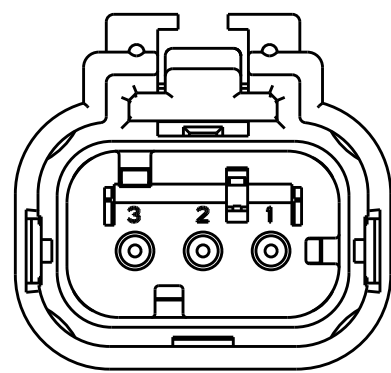


776523-3
SCALE 2:1
KEY C

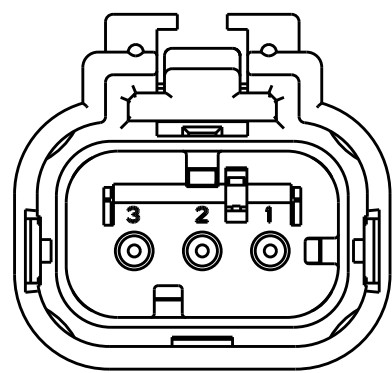


776523-4
SCALE 2:1
KEY D


- 1 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: BLACK
- 2 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: (SEE TABLE)
- 3 MATERIAL: SILICONE
COLOR: RUST
- 4 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: RED
5. RECOMMENDED WIRE DIAMETER RANGE IS 1.30 TO 2.54mm.
- 6 MATERIAL: SILICONE
COLOR: TAN

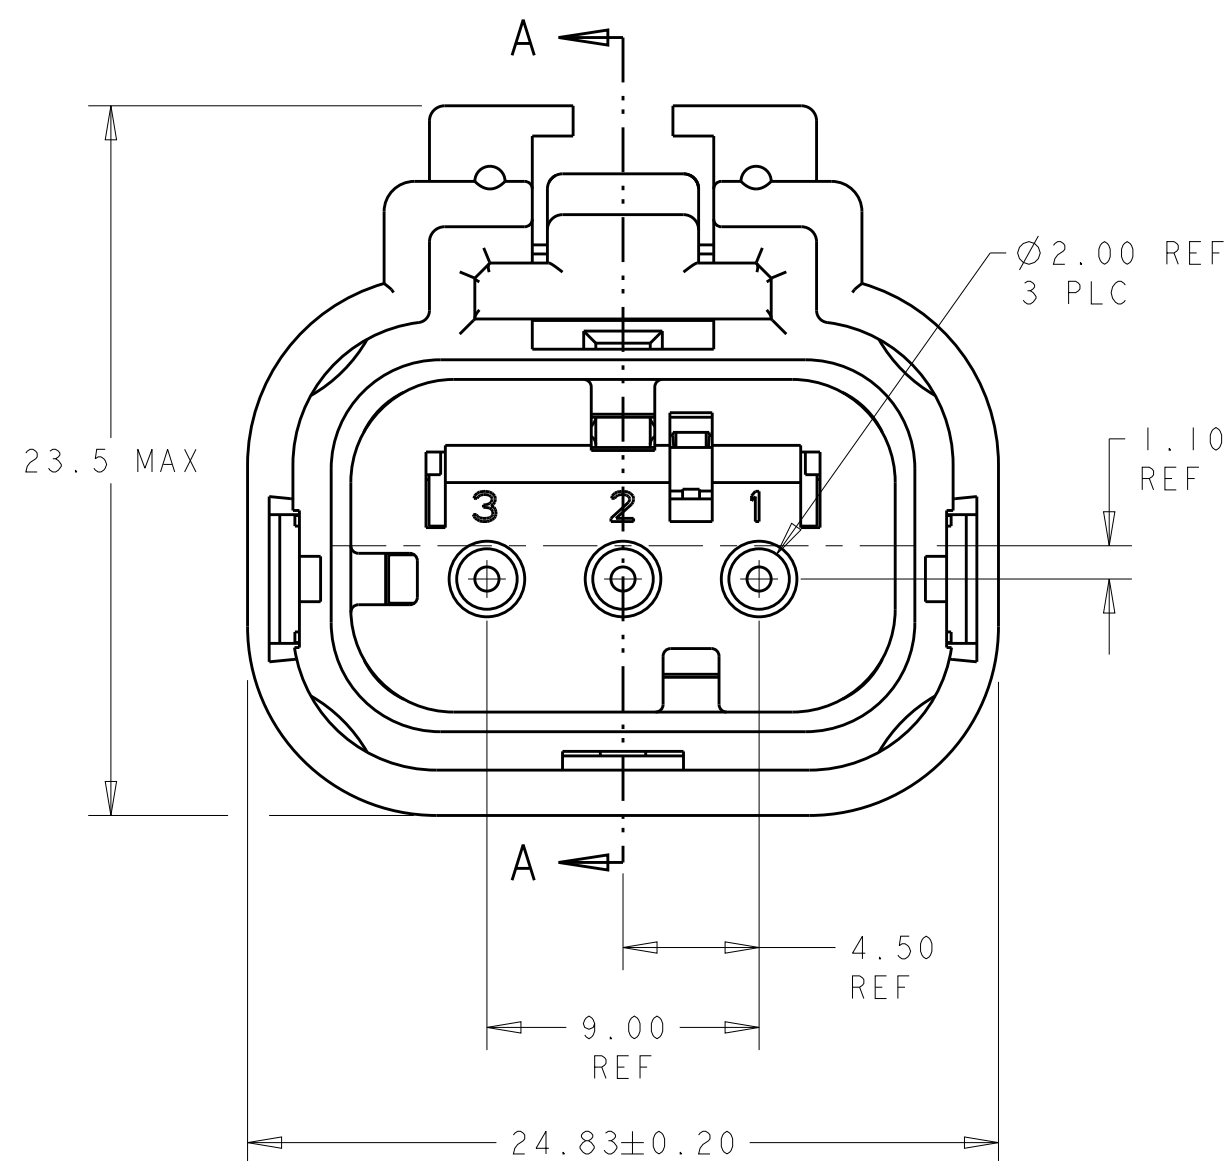


776523-1 SHOWN
KEY A

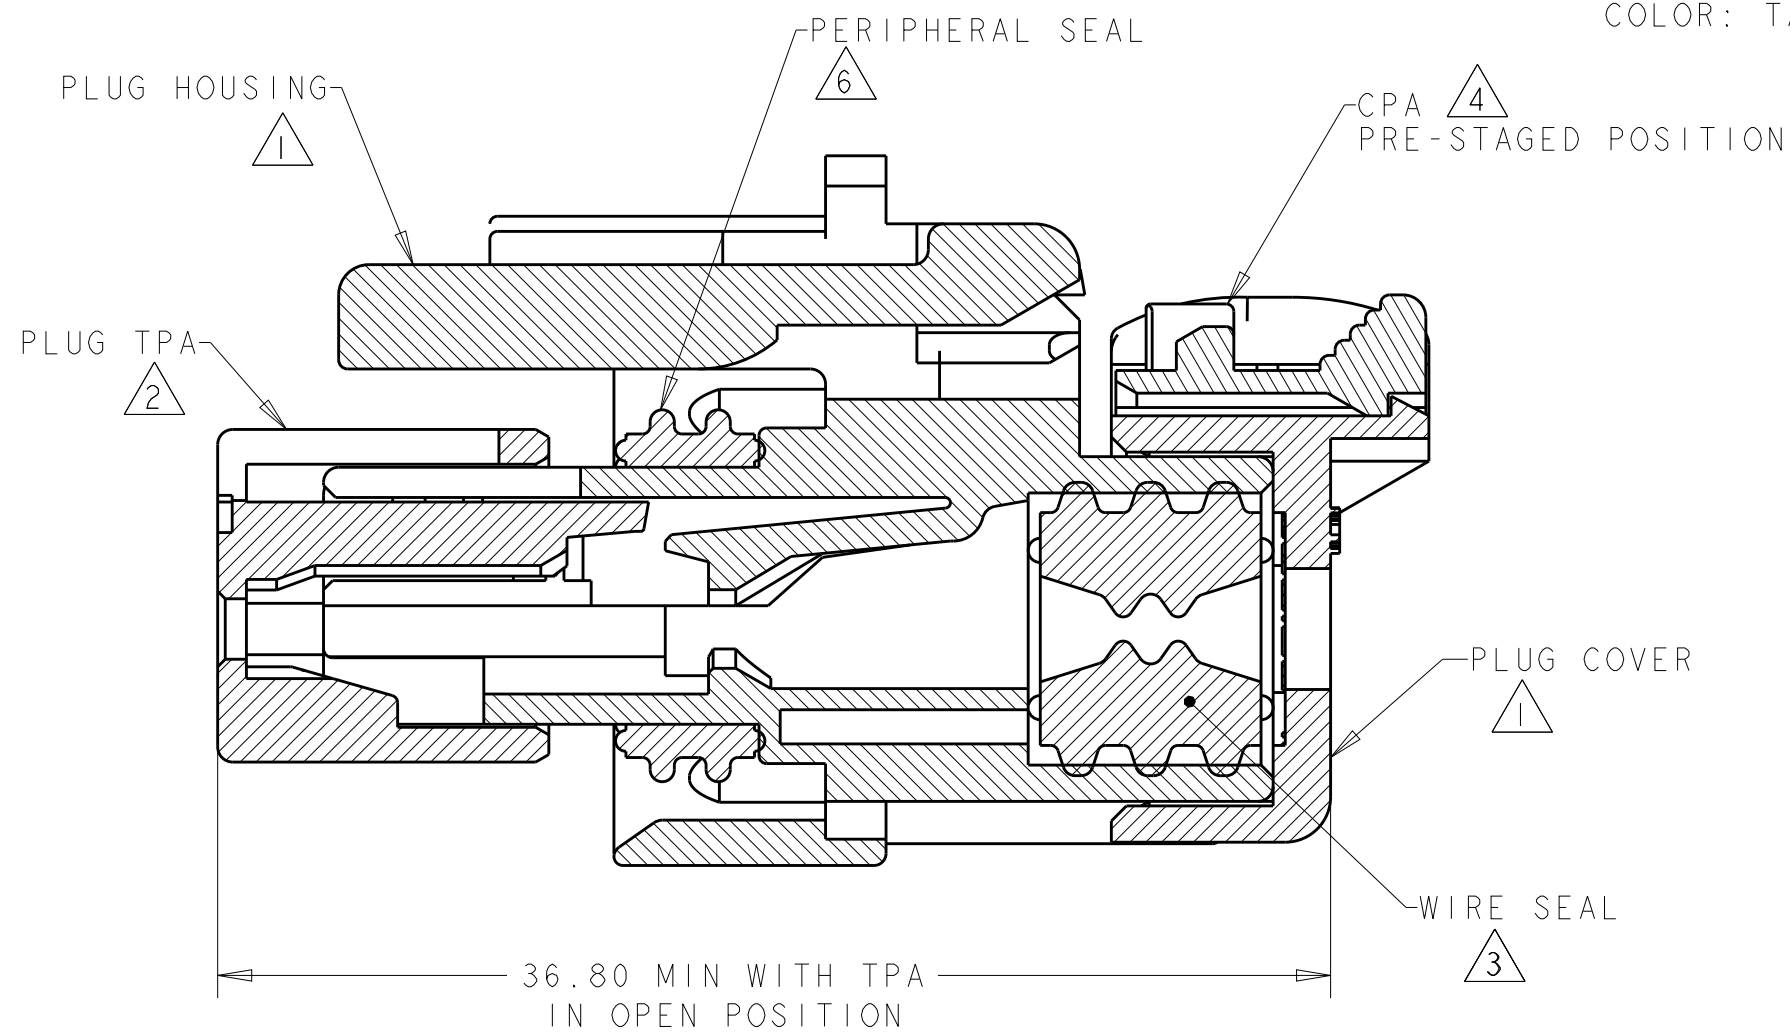


SECTION A-A

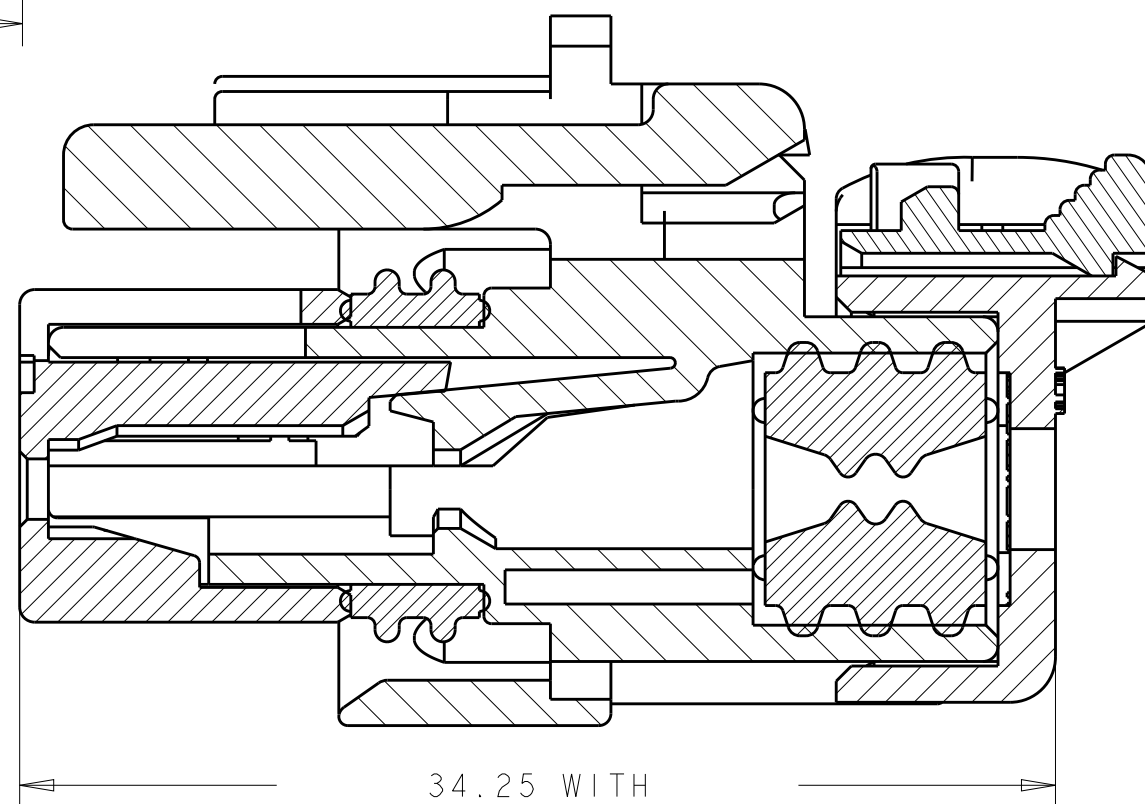

SECTION A-A

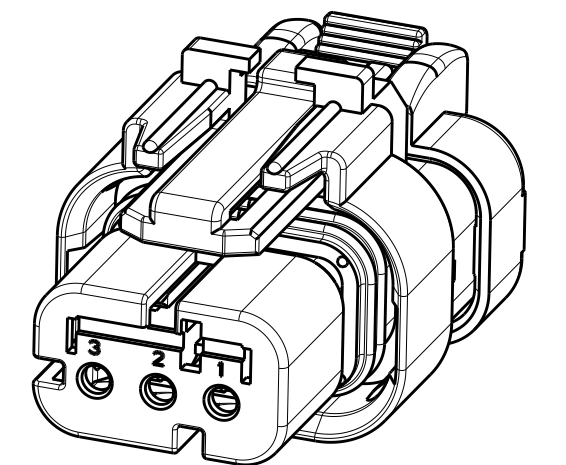


SCALE 2:1

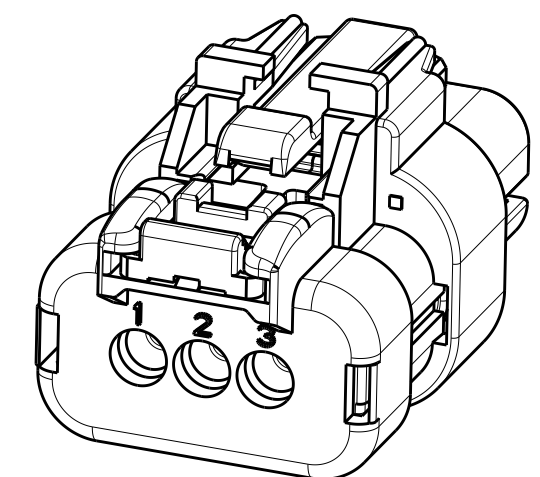

SCALE 2:1

D	GREEN	776523-4
C	YELLOW	776523-3
B	GRAY	776523-2
A	RED	776523-1
KEY	TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN AJ GRAFF	22FEB00	 TE Connectivity	
		CHK R. GREINER	11DEC01		
DIMENSIONS: mm		APVD M. TRULL	11DEC01	NAME	
		PRODUCT SPEC		PLUG ASSEMBLY, 3 POSITION, SINGLE ROW REDUCED DIA WIRE SEAL, AMPSEAL 16	
		108-2184			
		APPLICATION SPEC			
		114-13065			
		WEIGHT			
MATERIAL		FINISH		RESTRICTED TO	
-		-		-	
-		-		-	
		Customer Drawing		SCALE	SHEET
				4:1	OF
					REV
					F