




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C1	REVISED PER ECO-11-005294	30APR2011	RK	HMR
	D	REVISED PER ECO-13-019168	05DEC2013	DR	RB

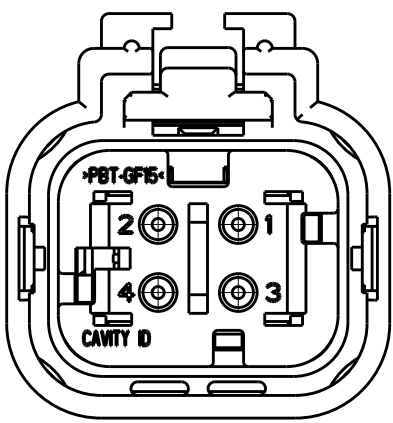


776524-2
SCALE 2:1

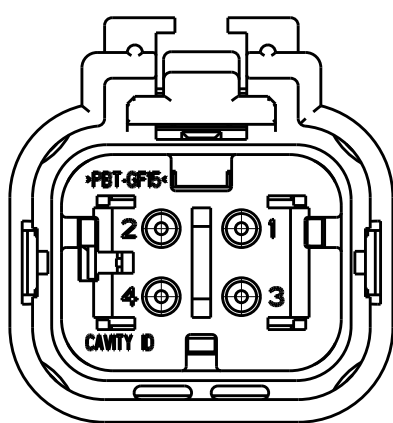

776524-3
SCALE 2:1

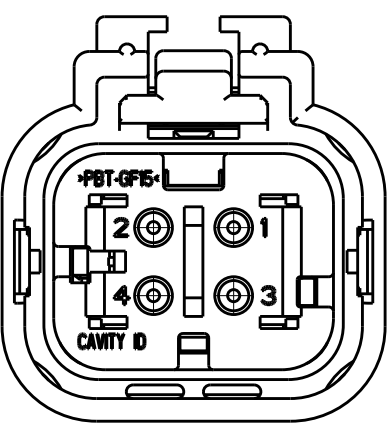


776524-4
SCALE 2:1

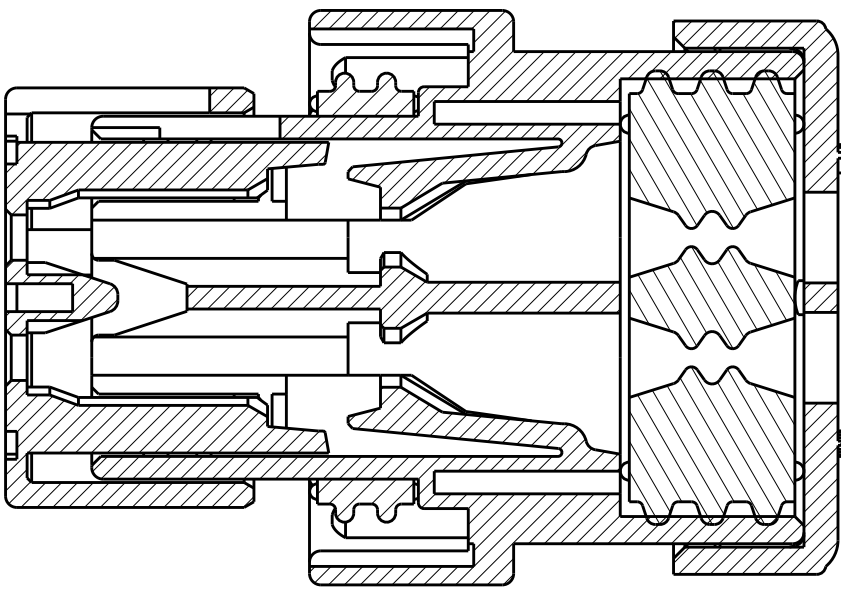


SECTION B-B


- 1 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: BLACK
- 2 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: (SEE TABLE)
- 3 MATERIAL: SILICONE
COLOR: RUST
- 4 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: RED
5. RECOMMENDED WIRE DIAMETER RANGE IS 1.30 TO 2.54mm
- 6 MATERIAL: SILICONE
COLOR: TAN

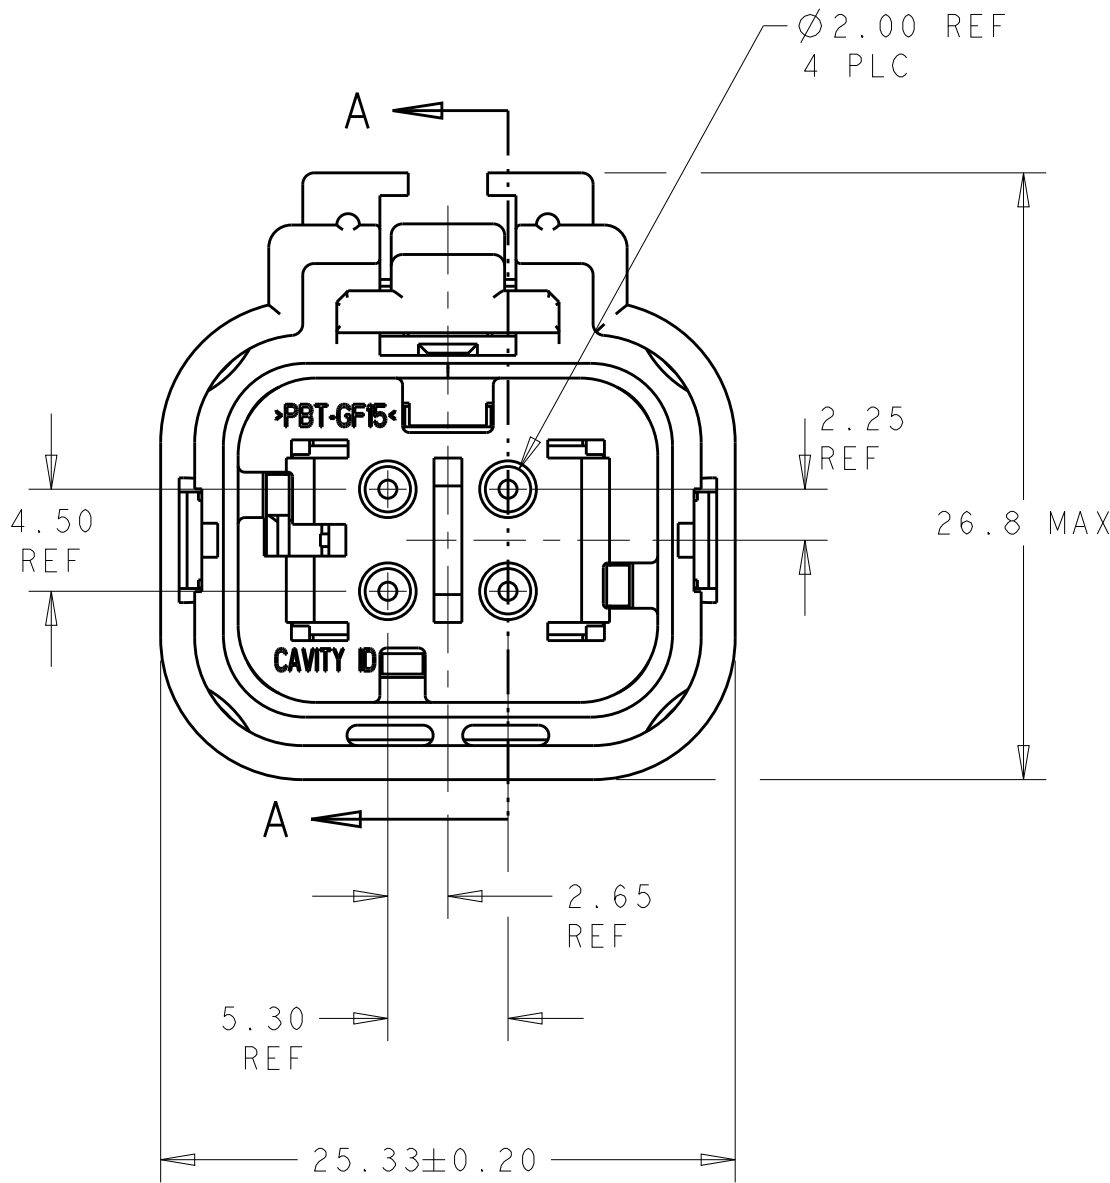

776524-1 SHOWN

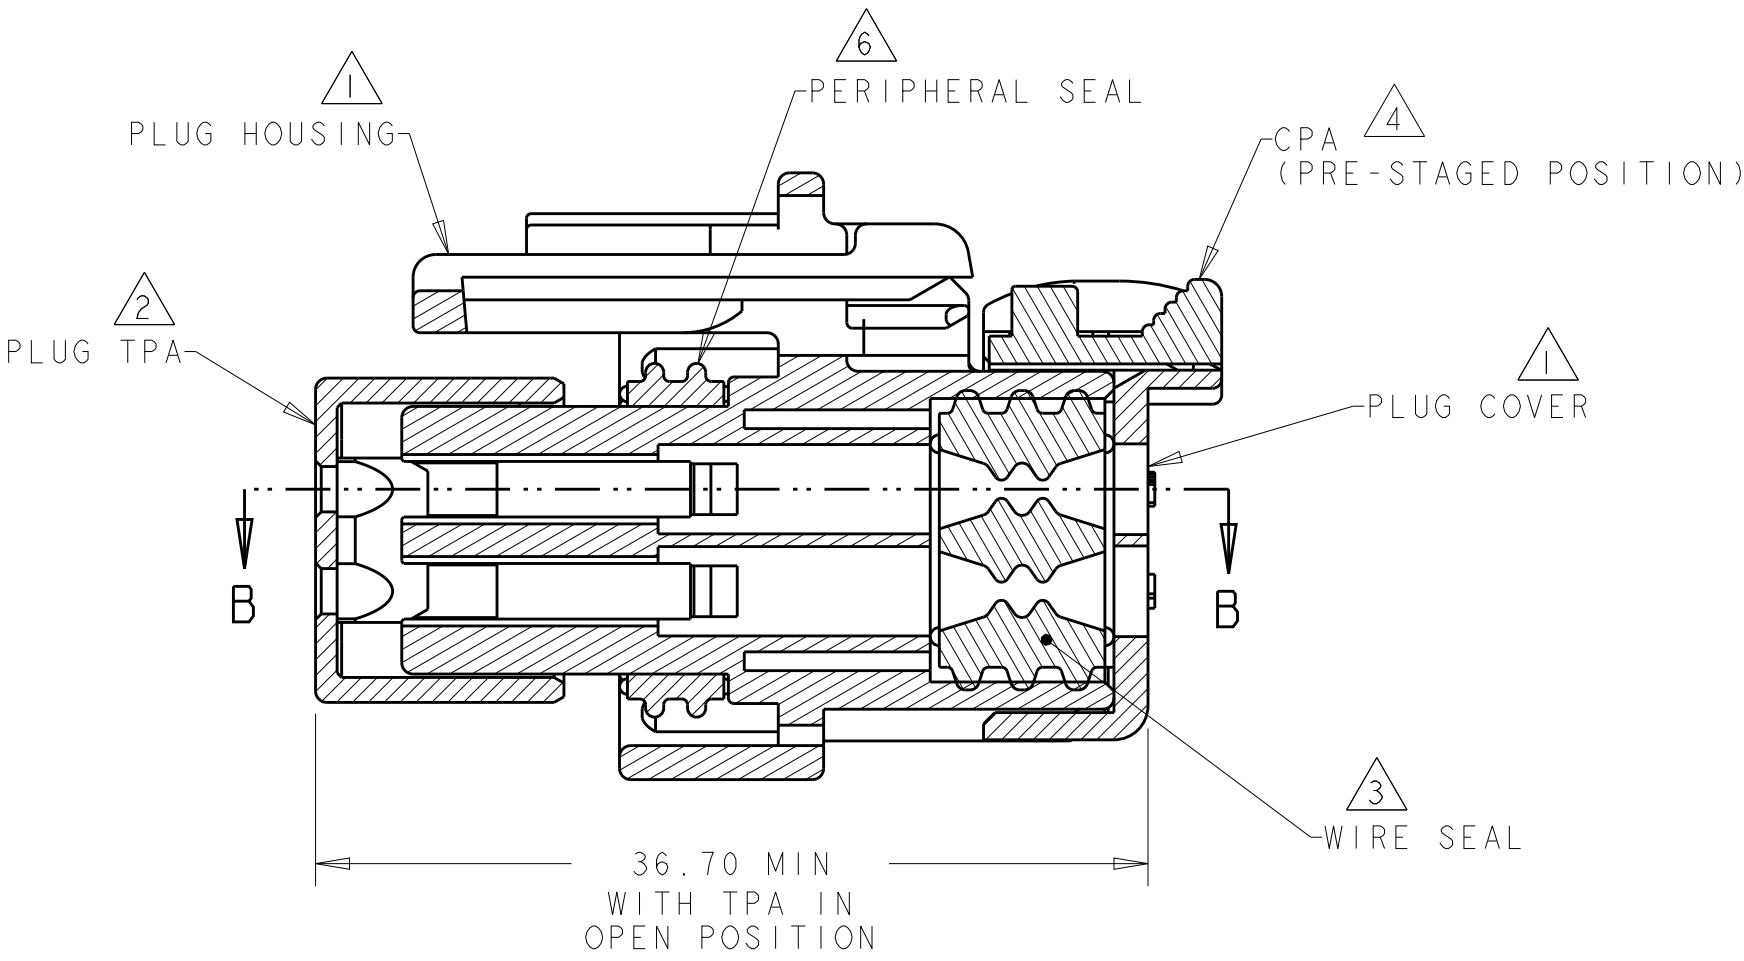

SECTION A-A

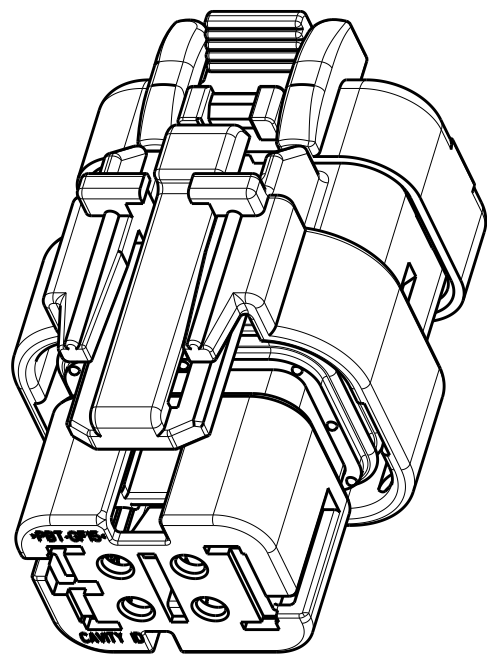

SCALE 2:1

GREEN	776524-4
YELLOW	776524-3
GRAY	776524-2
RED	776524-1
TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 04SEP2003 W. HOELSCHER	TE Connectivity			
DIMENSIONS:		CHK 04SEP2003 J. PATTERSON				
mm		APVD 04SEP2003 D. KLEIN	NAME			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	PLUG ASSEMBLY, 4 POSITION, 2 ROW, AMPSEAL 16 CONNECTOR REDUCED DIA WIRE SEAL			
0 PLC ±-		108-2184	SIZE			
1 PLC ±-		APPLICATION SPEC	CAGE CODE			
2 PLC ±-		114-13065	DRAWING NO			
3 PLC ±-		WEIGHT	RESTRICTED TO			
4 PLC ±-		12.5±1g	A200779C-776524			
ANGLES ±-		Customer Drawing	SCALE 3:1			
FINISH			SHEET 1 OF 1			
MATERIAL			REV D			