



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	REVISED PER ECO-13-019231	09DEC2013	DR	RB


- 1 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: BLACK
- 2 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: (SEE TABLE)
- 3 MATERIAL: SILICONE
COLOR: GREEN
- 4 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: RED
5. RECOMMENDED WIRE DIAMETER RANGE IS 2.18 TO 3.67mm.
- 6 MATERIAL: SILICONE
COLOR: TAN

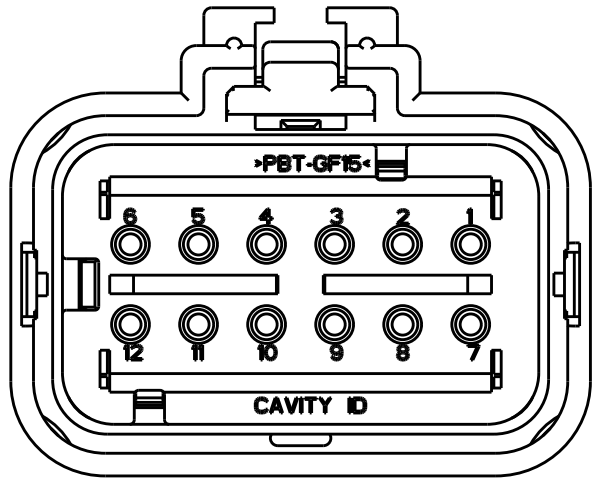


776437-2
SCALE 2:1

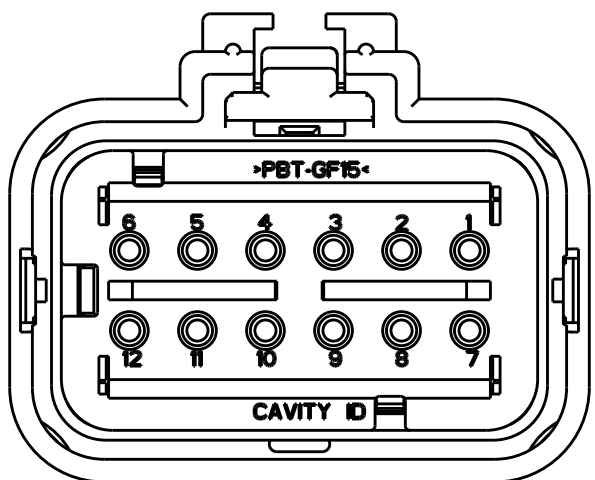



776437-3
SCALE 2:1

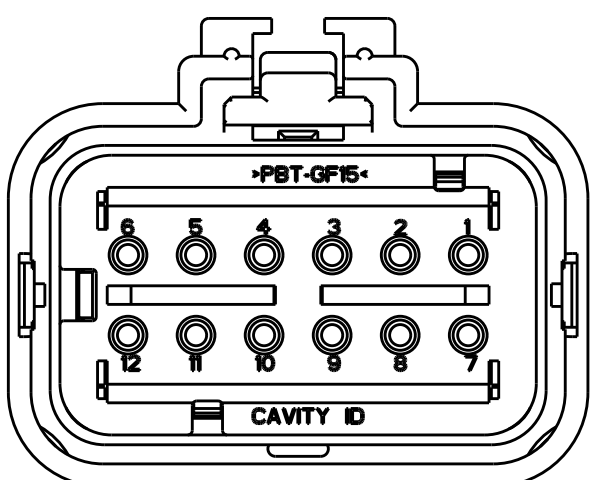

776437-4
SCALE 2:1

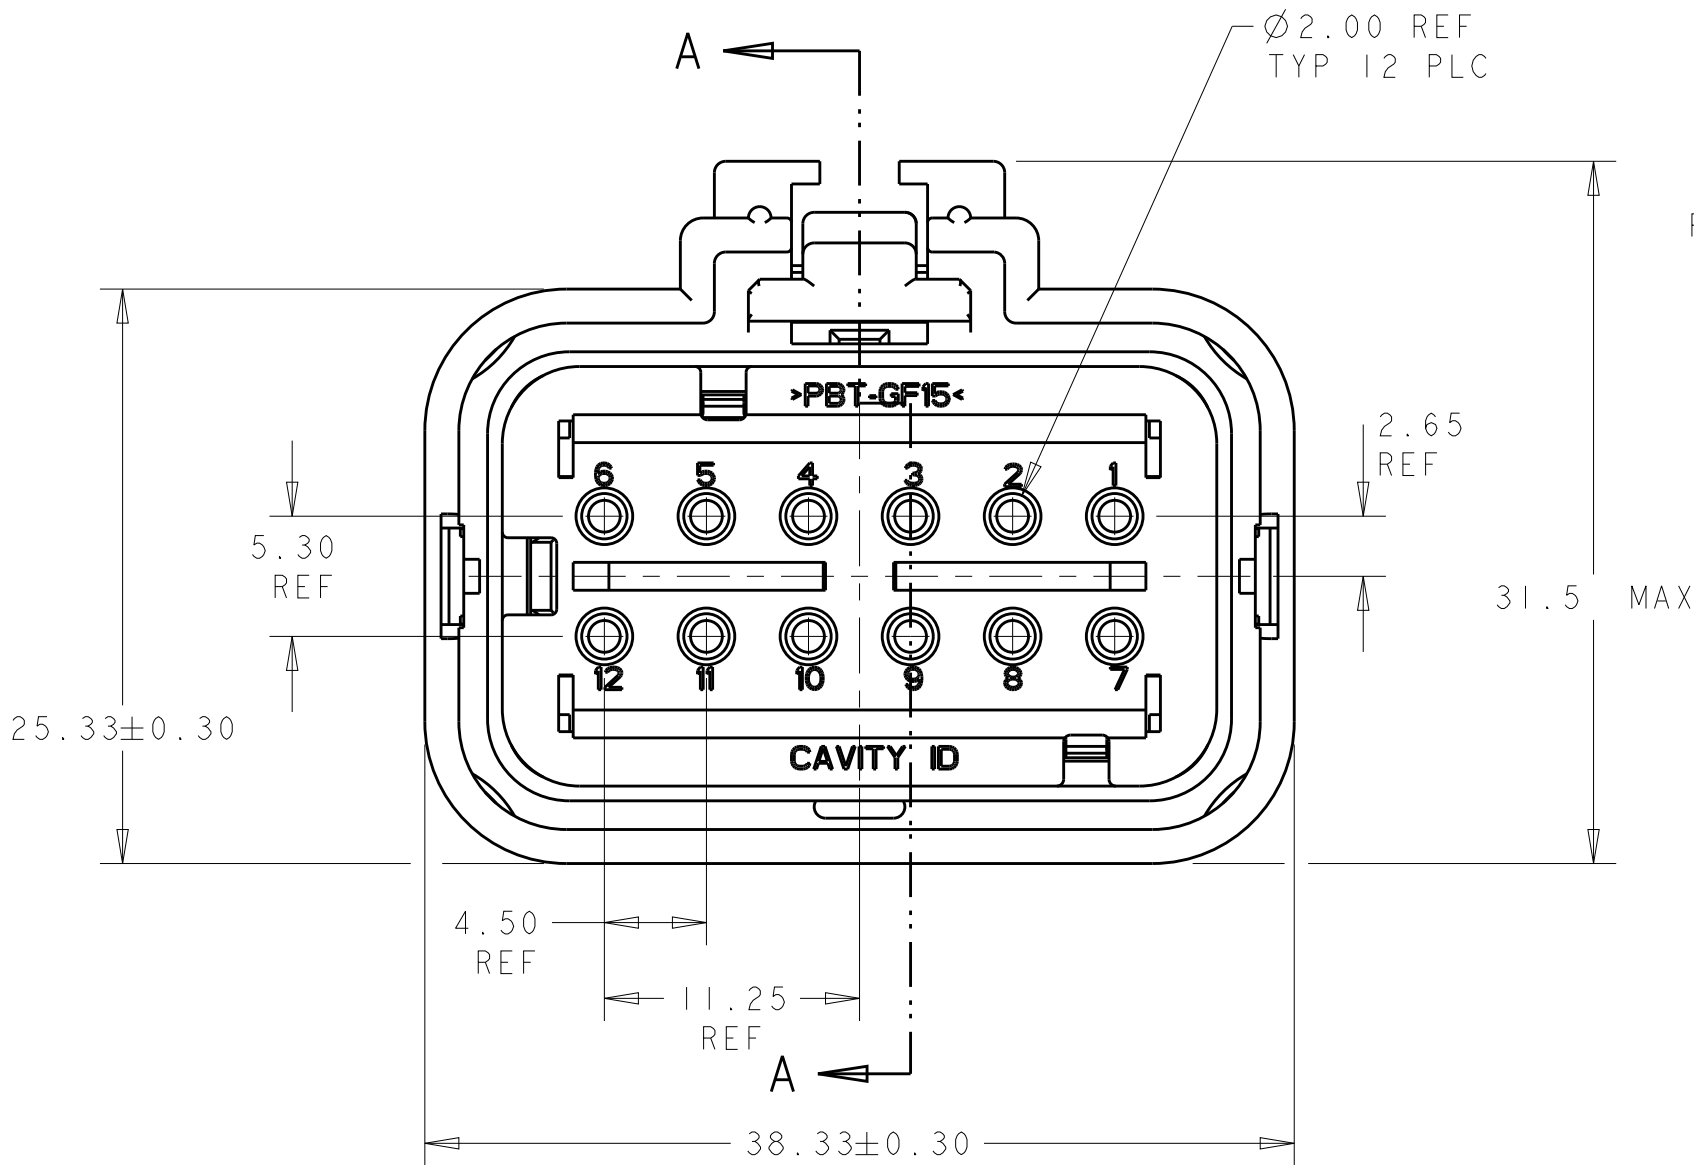

776437-1 SHOWN

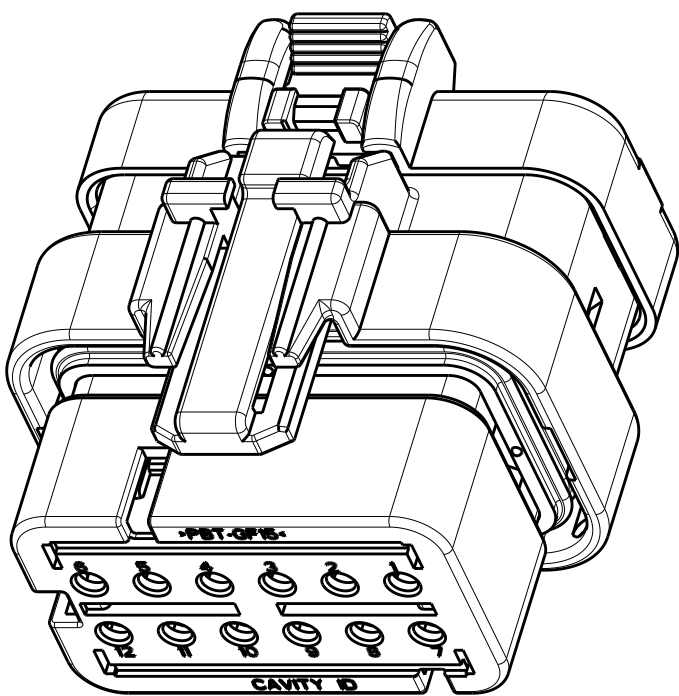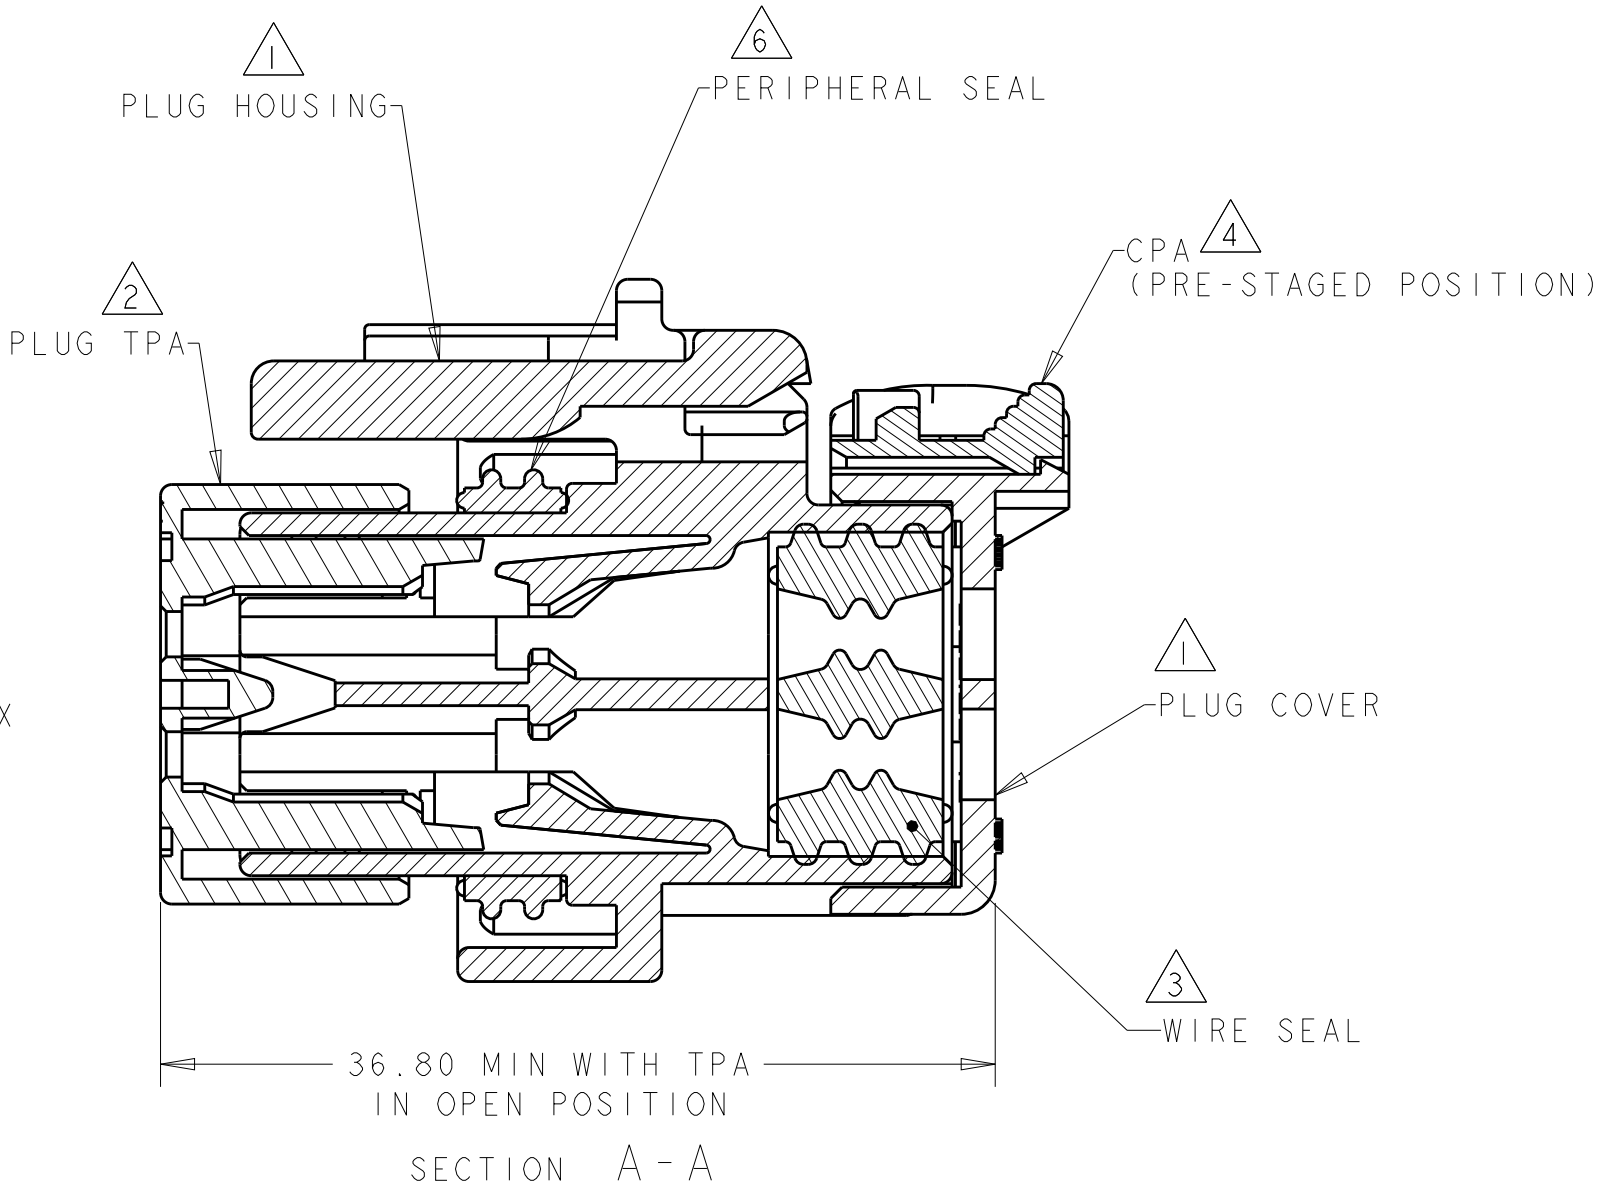

SCALE 2:1

GREEN	776437-4
YELLOW	776437-3
GRAY	776437-2
RED	776437-1
TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN AJ GRAFF 07JUN00	TE Connectivity			
DIMENSIONS:		CHK R. GREINER 03JAN02				
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. TRULLI 03JAN02	NAME			
	0 PLC ±	PRODUCT SPEC	PLUG ASSEMBLY, 12 POSITION, DUAL ROW, AMPSEAL 16			
	1 PLC ±	108-2184	SIZE CAGE CODE DRAWING NO RESTRICTED TO			
	2 PLC ±	APPLICATION SPEC				
	3 PLC ±	114-13065	A200779C-776437			
	4 PLC ±	WEIGHT				
	ANGLES ±	20	SCALE 3:1 SHEET 1 OF 1 REV F			
MATERIAL	FINISH	Customer Drawing				
-	-					
-	-					