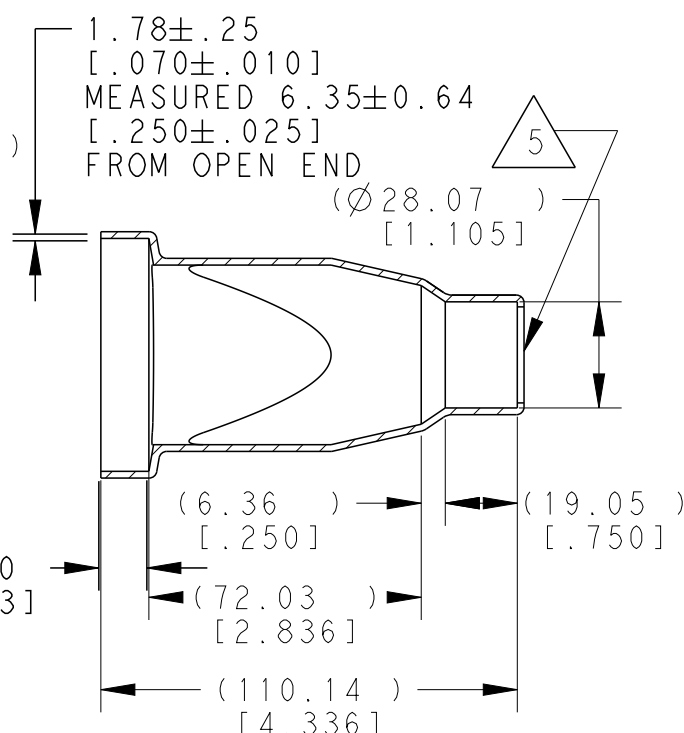
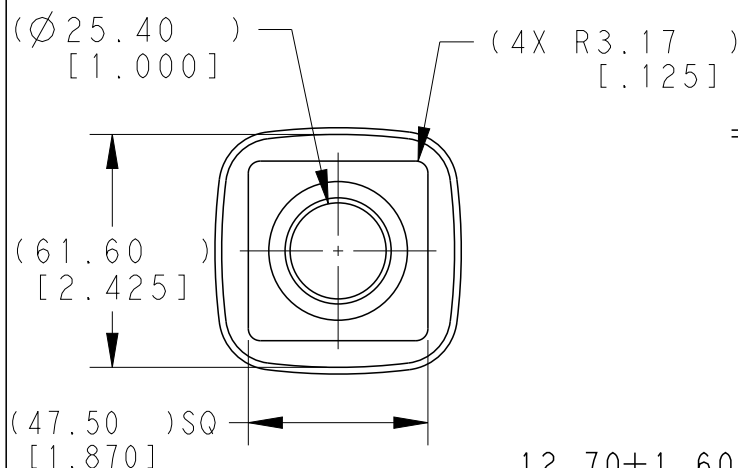
**3D VIEW**

6. SMALL NON-FILLS ARE ACCEPTABLE INSIDE OF PART, INCLUDING SUPPLIER MARKING.

5. SMALL MATERIAL EXTENSION IS ACCEPTABLE ON THIS END ALL AROUND. WALL THICKNESS ON THIS END MAY VARY.

4. BOTTOM OF PART MOLDED OPEN.

3. THIS ACCESSORY PART IS PROVIDED WITHOUT TYPICAL TRANSPORTATION INDUSTRY PROCESS CONTROLS. NO VALIDATION TESTING HAS BEEN PERFORMED. CUSTOMER IS RESPONSIBLE FOR DETERMINING PRODUCT PERFORMANCE AND SUITABILITY FOR APPLICATION.

2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]

1. THIS PART IS USED ON:
DRB12-48PXE-XXXX RECEPTACLE
DRB16-48SXE-XXXX PLUG
DRB12-60PXE-XXXX RECEPTACLE
DRB16-60SXE-XXXX PLUG
WHERE X=A,B,C,D KEYS AND XXXX=MODIFICATION

NOTES:

TE INTERNAL PN

DEUTSCH PN

DRB48-60-BT

DRB48-60-BT

DIMENSIONS:
MM[INCH]

DWN
D. MEYER

28JUN2014

MATERIAL

PVC

FINISH

BLACK

CHK
P. CARNAHAN

28JUN2014

APVD
D. MEYER

28JUN2014

PRODUCT SPEC

APPLICATION SPEC

NAME

BOOT, SMALL
DRB SERIES

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A 4

4AFU8

C-DRB48-60-BT

WEIGHT

49.00 G

CUSTOMER DRAWING

SCALE

1:2

SHEET

1 OF 1

REV

A2

2014

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

BY TE CONNECTIVITY

COPYRIGHT 2014

THIS DRAWING IS UNPUBLISHED.

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±0.63[.025]
3 PLC ±
4 PLC ±
ANGLES ±5°

