
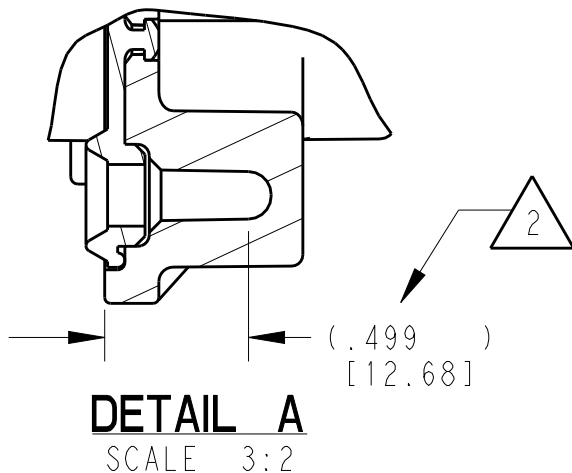
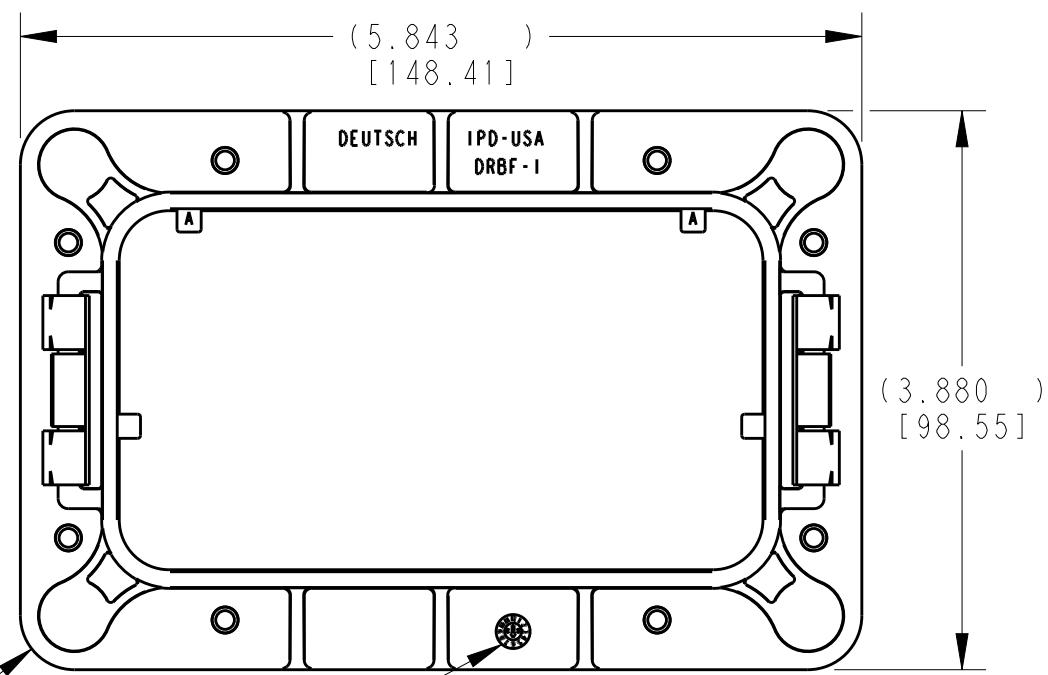
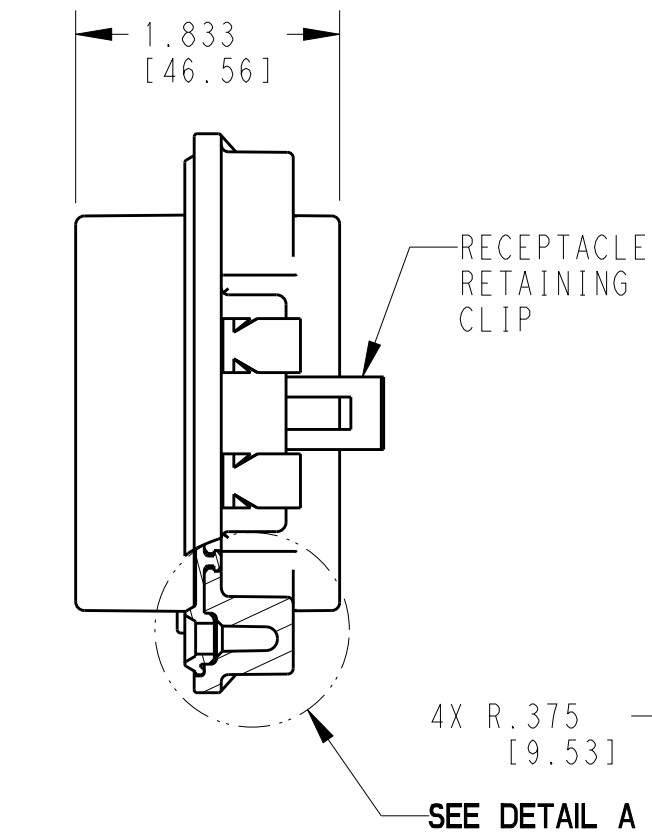
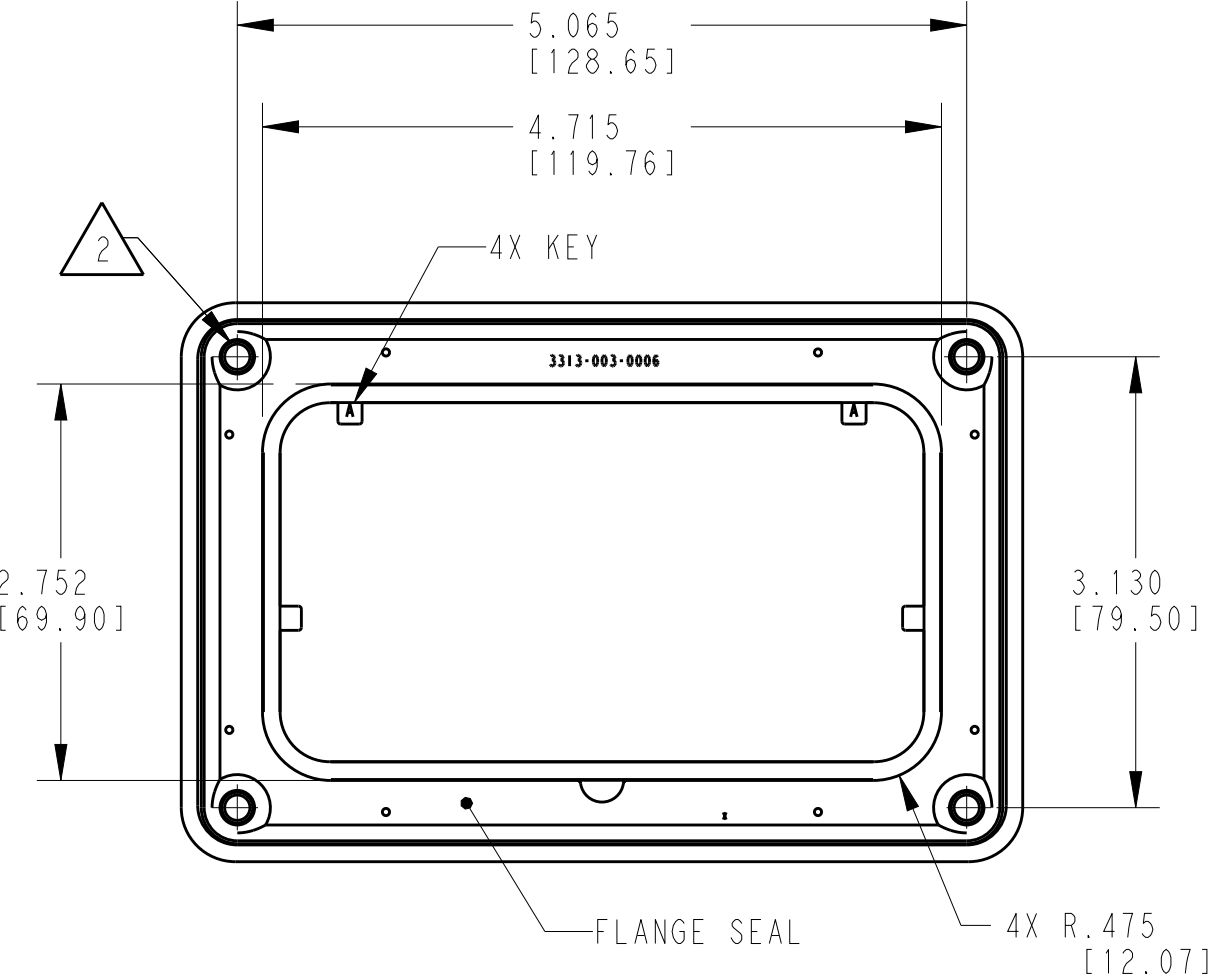


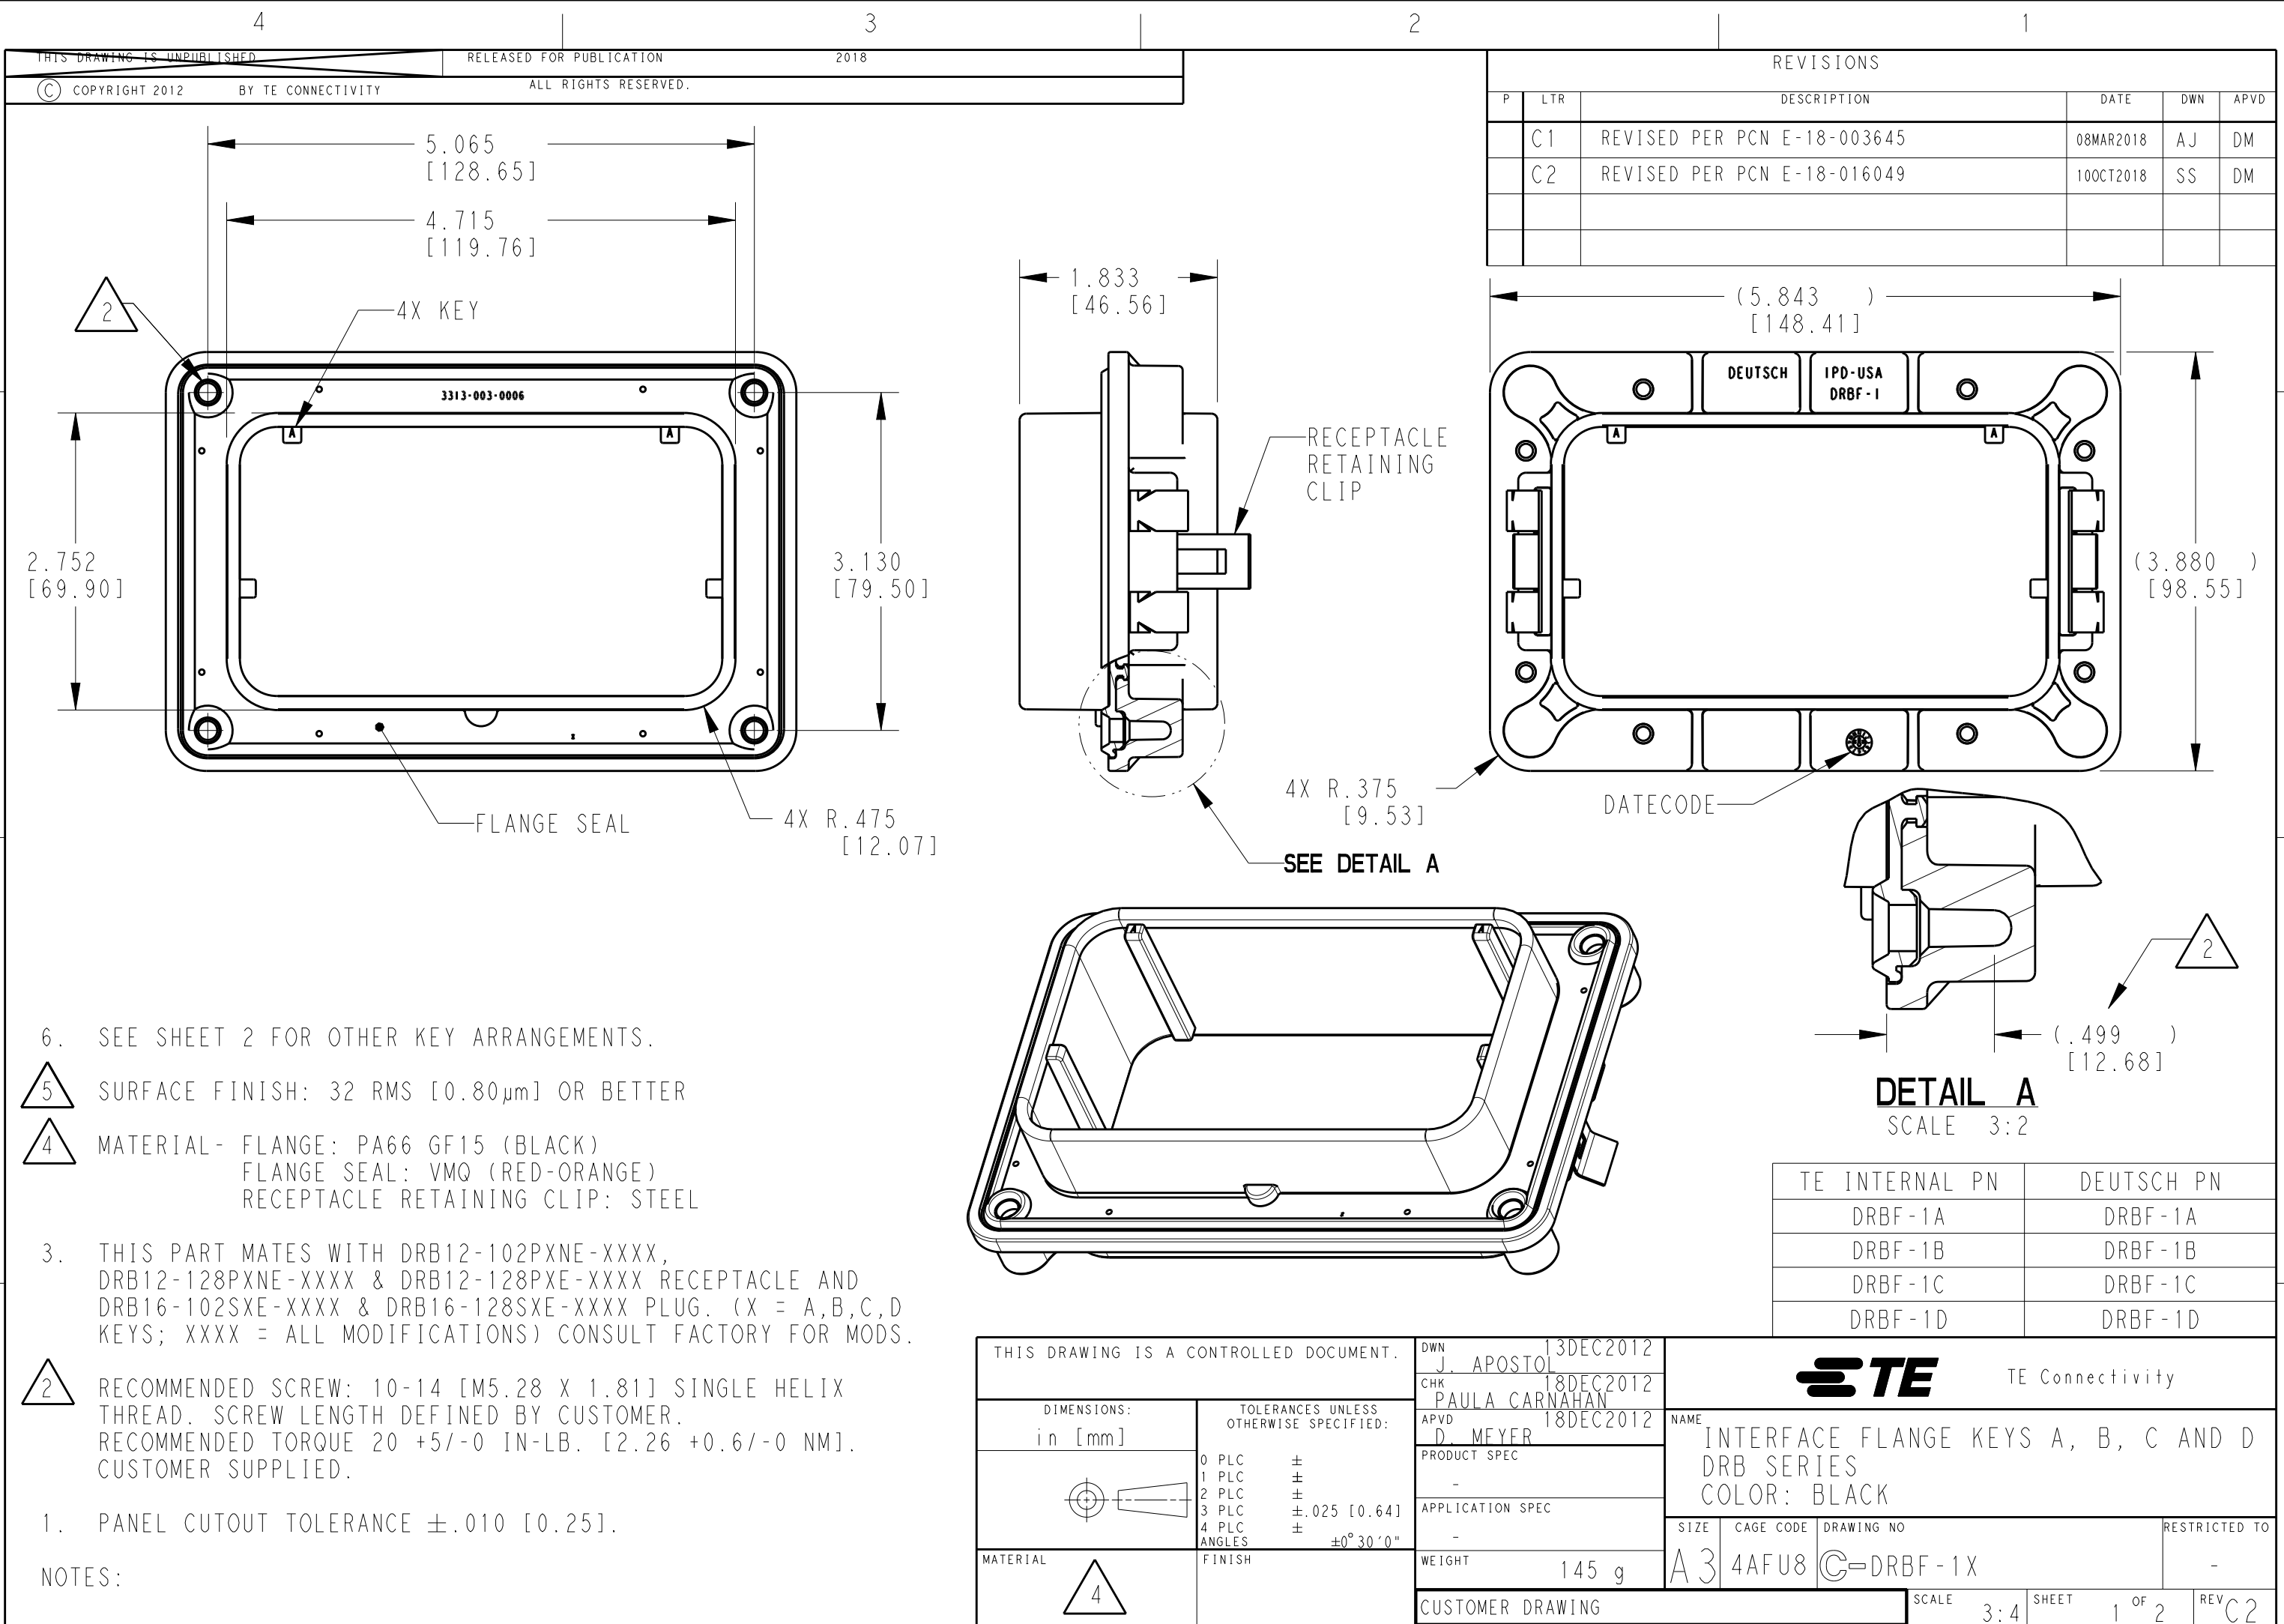

6. SEE SHEET 2 FOR OTHER KEY ARRANGEMENTS.
- 5 SURFACE FINISH: 32 RMS [0.80µm] OR BETTER
- 4 MATERIAL- FLANGE: PA66 GF15 (BLACK)
FLANGE SEAL: VMO (RED-ORANGE)
RECEPTACLE RETAINING CLIP: STEEL
3. THIS PART MATES WITH DRB12-102PXNE-XXXX, DRB12-128PXNE-XXXX & DRB12-128PXE-XXXX RECEPTACLE AND DRB16-102SXE-XXXX & DRB16-128SXE-XXXX PLUG. (X = A,B,C,D KEYS; XXXX = ALL MODIFICATIONS) CONSULT FACTORY FOR MODS.
- 2 RECOMMENDED SCREW: 10-14 [M5.28 X 1.81] SINGLE HELIX THREAD. SCREW LENGTH DEFINED BY CUSTOMER. RECOMMENDED TORQUE 20 +5/-0 IN-LB. [2.26 +0.6/-0 NM]. CUSTOMER SUPPLIED.
1. PANEL CUTOUT TOLERANCE ±.010 [0.25].

NOTES:

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. APOSTOL 13DEC2012	 TE Connectivity		
DIMENSIONS: in [mm]		CHK PAULA CARNAHAN 18DEC2012			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. MEYER 18DEC2012			
0 PLC ±		PRODUCT SPEC -			
1 PLC ±		APPLICATION SPEC -			
2 PLC ±		WEIGHT 145 g			
3 PLC ±.025 [0.64]		CUSTOMER DRAWING			
4 PLC ±		SCALE 3:4			
ANGLES ±0° 30' 0"		SHEET 1 OF 2			
FINISH		REV C2			

NAME INTERFACE FLANGE KEYS A, B, C AND D DRB SERIES COLOR: BLACK			
SIZE A3	CAGE CODE 4AFU8	DRAWING NO C-DRBF-1X	RESTRICTED TO -

