
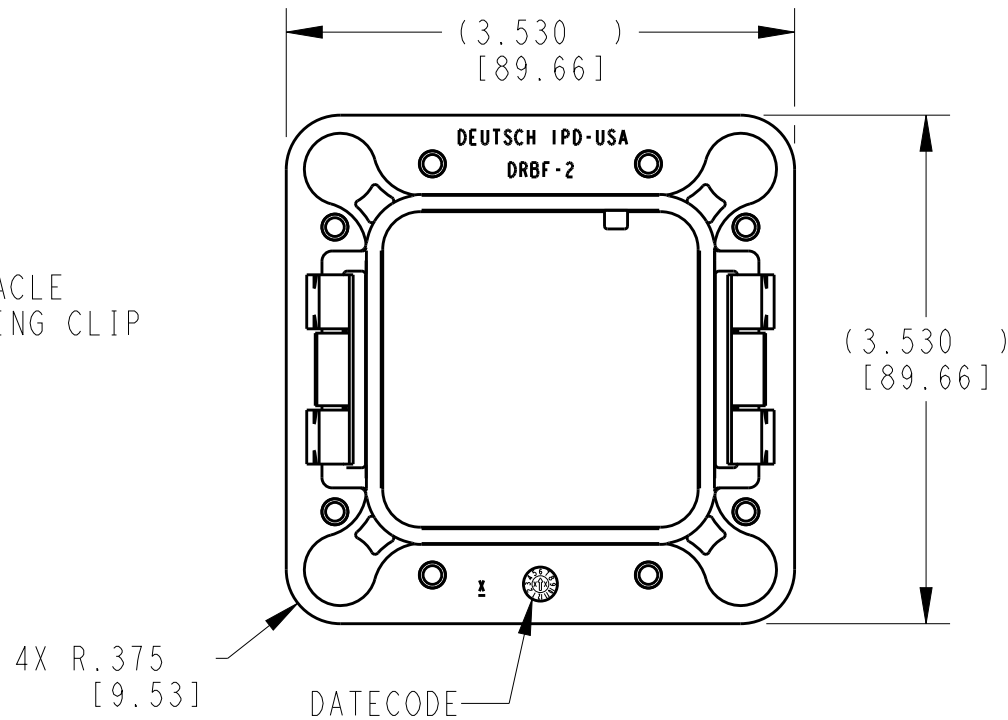
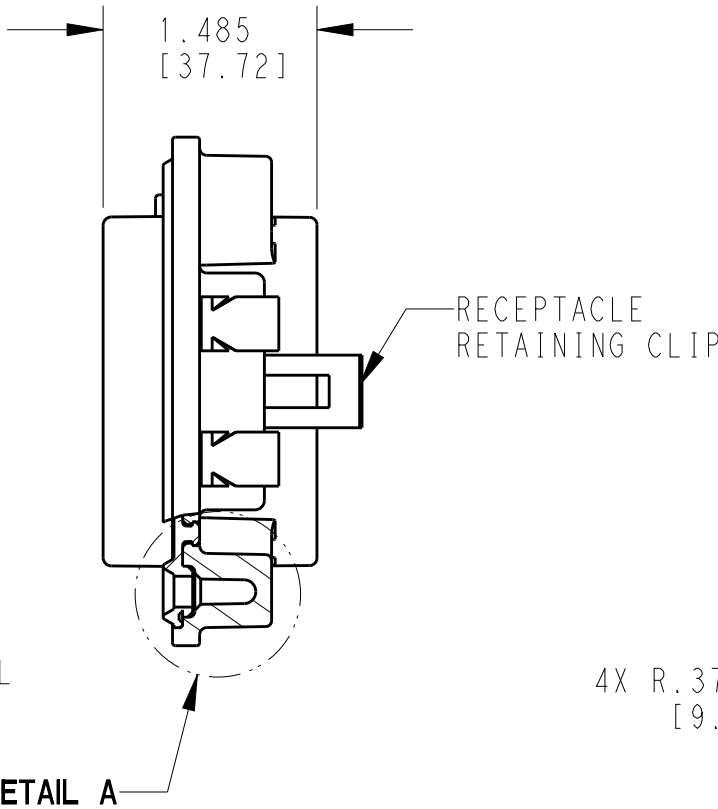


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED PER PCN E-18-003645	08MAR2018	AJ	DM
	A1	REVISED PER PCN E-18-016049	10OCT2018	SS	DM

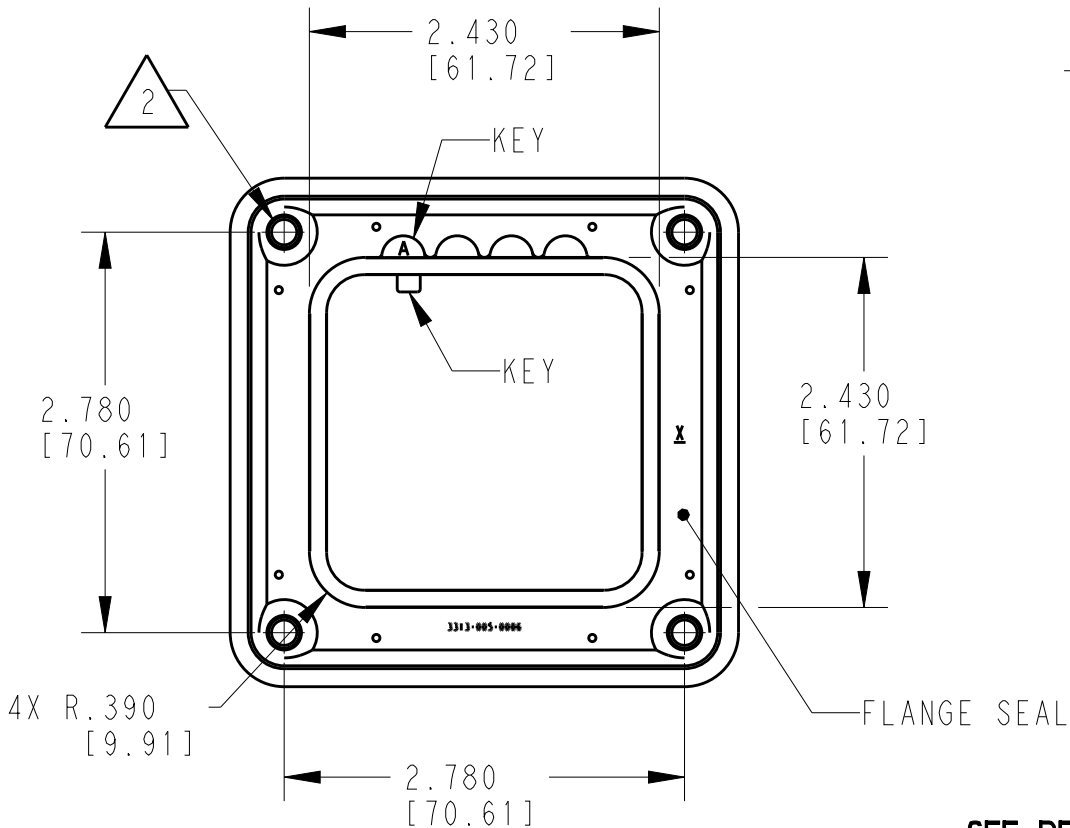

7. SEE SHEET 2 FOR OTHER KEY ARRANGEMENTS.

6. CONSULT FACTORY FOR APPLICATION.

5. SURFACE FINISH: 32 RMS [0.80µm] OR BETTER


4. MATERIAL: FLANGE: PA66 GF15 (BLACK)
FLANGE SEAL: VWQ (RED-ORANGE)
RECEPTACLE RETAINING CLIP: STEEL

3. THIS PART MATES WITH DRB12-48PXE-XXXX, DRB12-60PXE-XXXX, DRB12-60PXNE-XXXX RECEPTACLE AND DRB16-48SXE-XXXX, DRB16-60SXE-XXXX PLUG. (X = A,B,C,D KEYS; XXXX = ALL MODIFICATIONS) CONSULT FACTORY FOR MODS.


2. RECOMMENDED SCREW: 10-14 [M5.28 X 1.81] SINGLE HELIX THREAD. SCREW LENGTH DEFINED BY CUSTOMER. RECOMMENDED TORQUE: 20 +5/-0 IN-LB. [2.26 +0.6/-0 NM] CUSTOMER SUPPLIED.

1. PANEL CUTOUT TOLERANCE ±.010 [0.25].

NOTES:

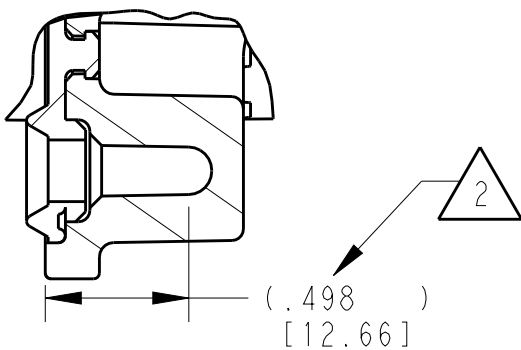

DETAIL A
SCALE 3:2

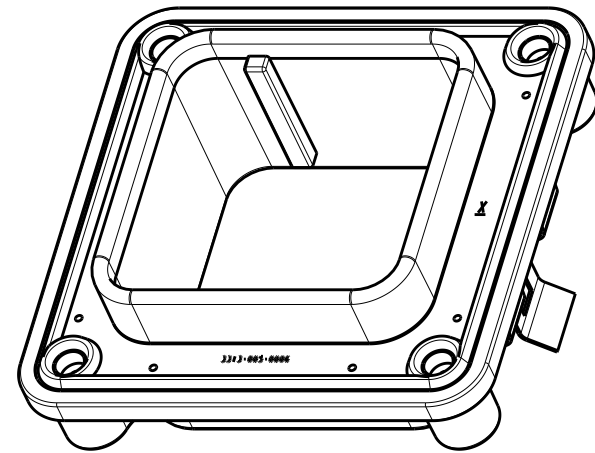

TE INTERNAL PN	DEUTSCH PN
DRBF-2A	DRBF-2A
DRBF-2B	DRBF-2B
DRBF-2C	DRBF-2C
DRBF-2D	DRBF-2D

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. PALLUTH 03FEB2001	TE Connectivity		
		CHK S. PALLUTH 03FEB2001			
		APVD D. MEYER 03FEB2001	NAME INTERFACE FLANGE KEY ARRANGEMENTS A, B, C AND D DRB SERIES. COLOR: BLACK		
DIMENSIONS: in [mm]		PRODUCT SPEC -	SIZE A3	CAGE CODE 4AFU8	DRAWING NO. C-DRBF-2X
		APPLICATION SPEC -	RESTRICTED TO -		
MATERIAL 4		WEIGHT 136 g	SCALE 3:4	SHEET 1 OF 2	REV A1
		CUSTOMER DRAWING			

