

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

2011



COPYRIGHT 2011

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

A1

-

A1

NEW PRO/E DRAW ING

31MAR2011

SH


-

Einzelleiterdichtung fuer Standard-Power-Timer,
AMP MCP6.3/4.8K und 5.8mm Flachstecker
SEALING FOR STANDARD-POWER-TIMER, AMP MCP6.3/4.8K
AND 5.8mm TAB




Geeignet fuer Isolations $\varnothing 1.4-2.0\text{mm}$
(FLK-Leitung 0.35mm^2 , FLR-Leitung $0.5-1.0\text{mm}^2$)
DEDICATED FOR INSULATION DIA $1.4-2.0\text{mm}$
(FLK-CABLE WIRE SIZE 0.35mm^2
FLR-CABLE WIRE SIZE $0.5-1.0\text{mm}^2$)

A-A

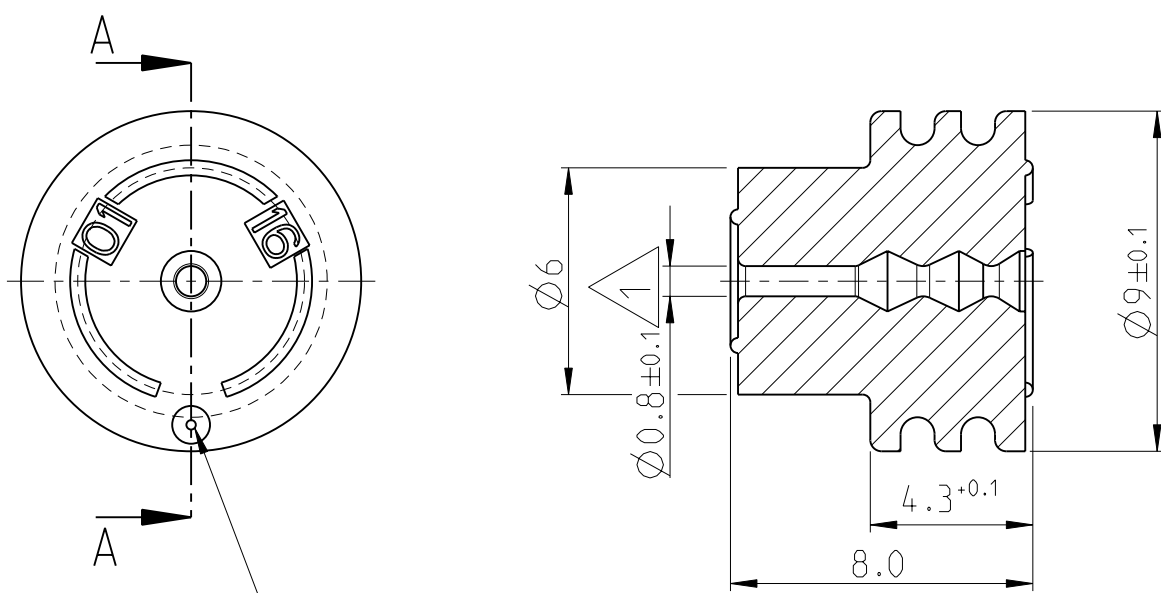

Anguss erhaben
INJECTION POINT RAISED 0.2max

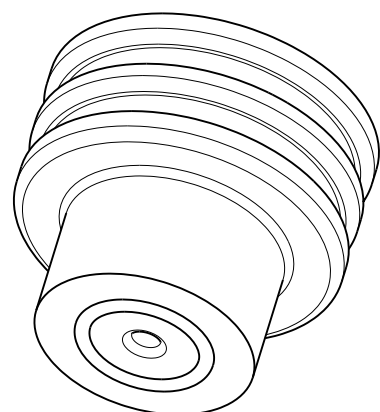

2177018-1	A	SINGLE WIRE SEAL Einzelleiterdichtung	YELLOW gelb	01
PART NO Teile-Nr.	REV	DESCRIPTION Bezeichnung	COLOUR Farbe	ITEM NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 31MAR2011 SHREESHAIL, H		
		CHK 07JUNE2011 Schaefer, R.		
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD -	NAME SINGLE WIRE SEAL, INSULATION DIA 1.4-2.0mm Einzeldrahtdichtung	
		PRODUCT SPEC -		
	0 PLC ± 0.2 1 PLC $\pm$ 2 PLC $\pm$ 3 PLC $\pm$ 4 PLC $\pm$ ANGLES $\pm 2^\circ$	APPLICATION SPEC -	SIZE A3	
		WEIGHT 0.36 [g]		
MATERIAL MVQ, SILICON	FINISH -	CUSTOMER DRAW ING	SCALE 5:1	SHEET 1 OF 1
			RESTRICTED TO	REV A1