


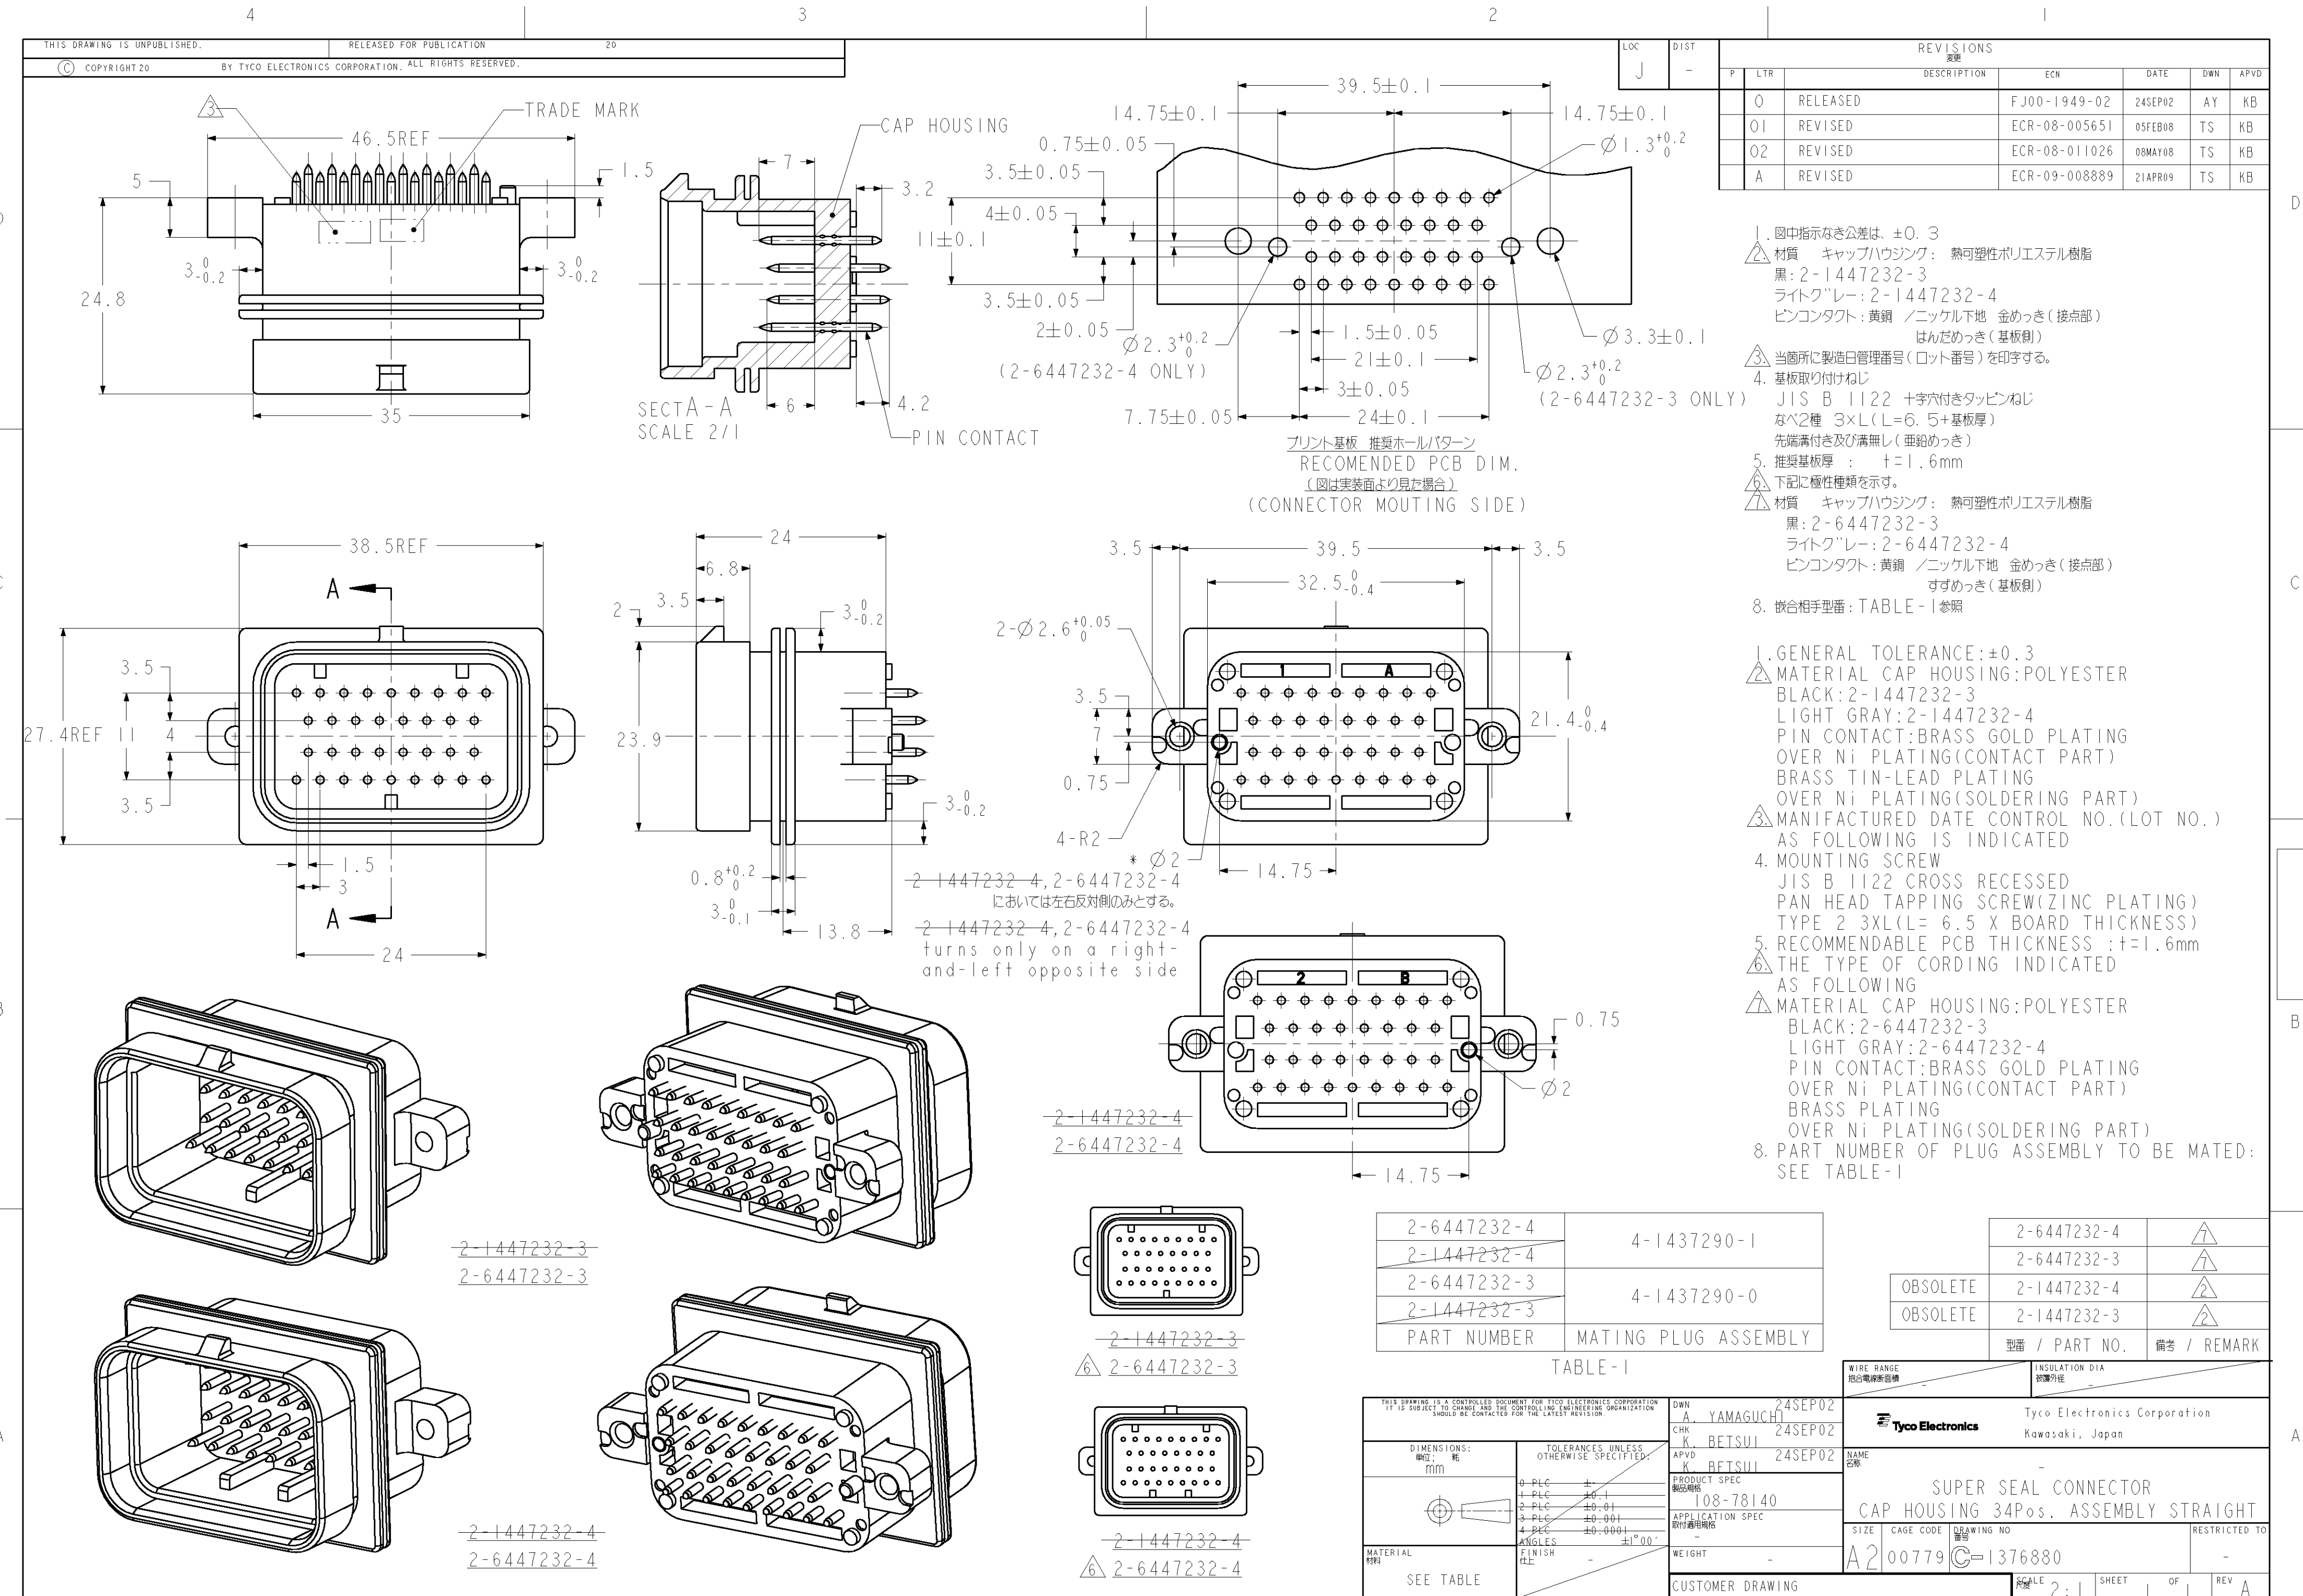

REVISED					
P	LTR	DESCRIPTION	ECN	DATE	DWN
0		RELEASED	FJ00-1949-02	24SEP02	AY
01		REVISED	ECR-08-005651	05FEB08	TS
02		REVISED	ECR-08-011026	08MAY08	TS
A		REVISED	ECR-09-008889	21APR09	TS

1. 図中指示なき公差は、 ± 0.3
2. 材質 キャップハウジング: 熱可塑性ポリエステル樹脂
黒: 2-1447232-3
ライトグレー: 2-1447232-4
ピンコンタクト: 黄銅 / ニッケル下地 金めっき (接点部)
はんだめっき (基板側)
3. 当箇所製造日管理番号 (ロット番号) を印字する。
4. 基板取り付けねじ
JIS B 1122 十字穴付きタッピンねじ
なべ2種 3×L (L=6.5+基板厚)
先端溝付き及び溝無し (亜鉛めっき)
推奨基板厚: $t=1.6$ mm
5. 推奨基板厚: $t=1.6$ mm
6. 下記に極性種類を示す。
7. 材質 キャップハウジング: 熱可塑性ポリエステル樹脂
黒: 2-6447232-3
ライトグレー: 2-6447232-4
ピンコンタクト: 黄銅 / ニッケル下地 金めっき (接点部)
すずめっき (基板側)
8. 嵌合相手型番: TABLE-1参照

1. GENERAL TOLERANCE: ± 0.3
2. MATERIAL CAP HOUSING: POLYESTER
BLACK: 2-1447232-3
LIGHT GRAY: 2-1447232-4
PIN CONTACT: BRASS GOLD PLATING
OVER Ni PLATING (CONTACT PART)
BRASS TIN-LEAD PLATING
OVER Ni PLATING (SOLDERING PART)
3. MANUFACTURED DATE CONTROL NO. (LOT NO.)
AS FOLLOWING IS INDICATED
4. MOUNTING SCREW
JIS B 1122 CROSS RECESSED
PAN HEAD TAPPING SCREW (ZINC PLATING)
TYPE 2 3XL (L=6.5 X BOARD THICKNESS)
5. RECOMMENDABLE PCB THICKNESS: $t=1.6$ mm
6. THE TYPE OF CORDING INDICATED
AS FOLLOWING
7. MATERIAL CAP HOUSING: POLYESTER
BLACK: 2-6447232-3
LIGHT GRAY: 2-6447232-4
PIN CONTACT: BRASS GOLD PLATING
OVER Ni PLATING (CONTACT PART)
BRASS PLATING
OVER Ni PLATING (SOLDERING PART)
8. PART NUMBER OF PLUG ASSEMBLY TO BE MATED:
SEE TABLE-1

2-6447232-4	4-1437290-1	2-6447232-4	△
2-1447232-4		2-6447232-3	△
2-6447232-3	4-1437290-0	OBSOLETE 2-1447232-4	△
2-1447232-3		OBSOLETE 2-1447232-3	△
PART NUMBER	MATING PLUG ASSEMBLY	型番 / PART NO.	備考 / REMARK

WIRE RANGE 適合電線断面規格		INSULATION DIA 絶縁外径	
DWN A YAMAGUCHI 24SEP02		Tyco Electronics Corporation Kawasaki, Japan	
CHK K BETSUI 24SEP02		NAME 名称	
APVD K BETSUI 24SEP02		SUPER SEAL CONNECTOR CAP HOUSING 34Pos. ASSEMBLY STRAIGHT	
PRODUCT SPEC 製品規格		SIZE 寸法	
108-78140		CAGE CODE 倉庫番号	
APPLICATION SPEC 取付適用規格		DRAWING NO 図番	
WEIGHT 重量		A2 00779 C-1376880	
CUSTOMER DRAWING		RESTRICTED TO 限定	
SCALE 尺		SHEET 頁	
2:1		OF 1	
		REV A	