
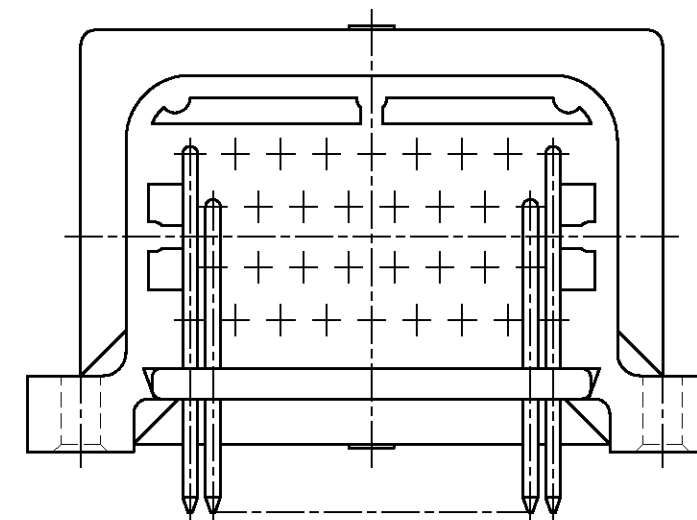
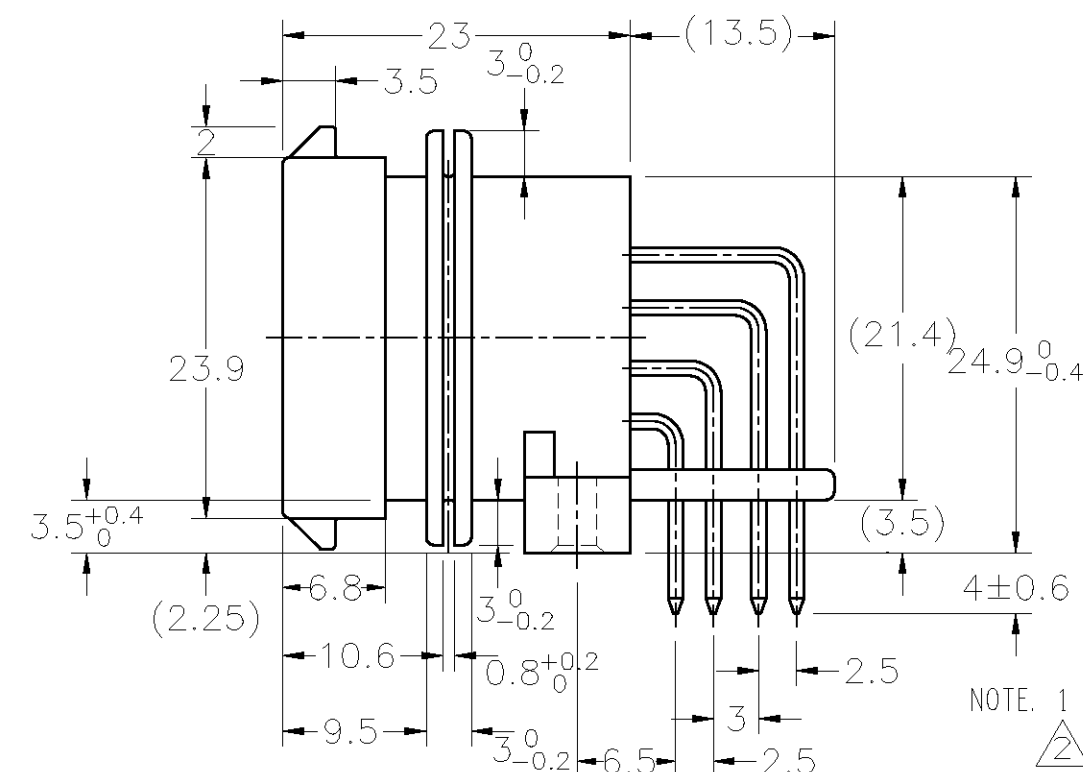
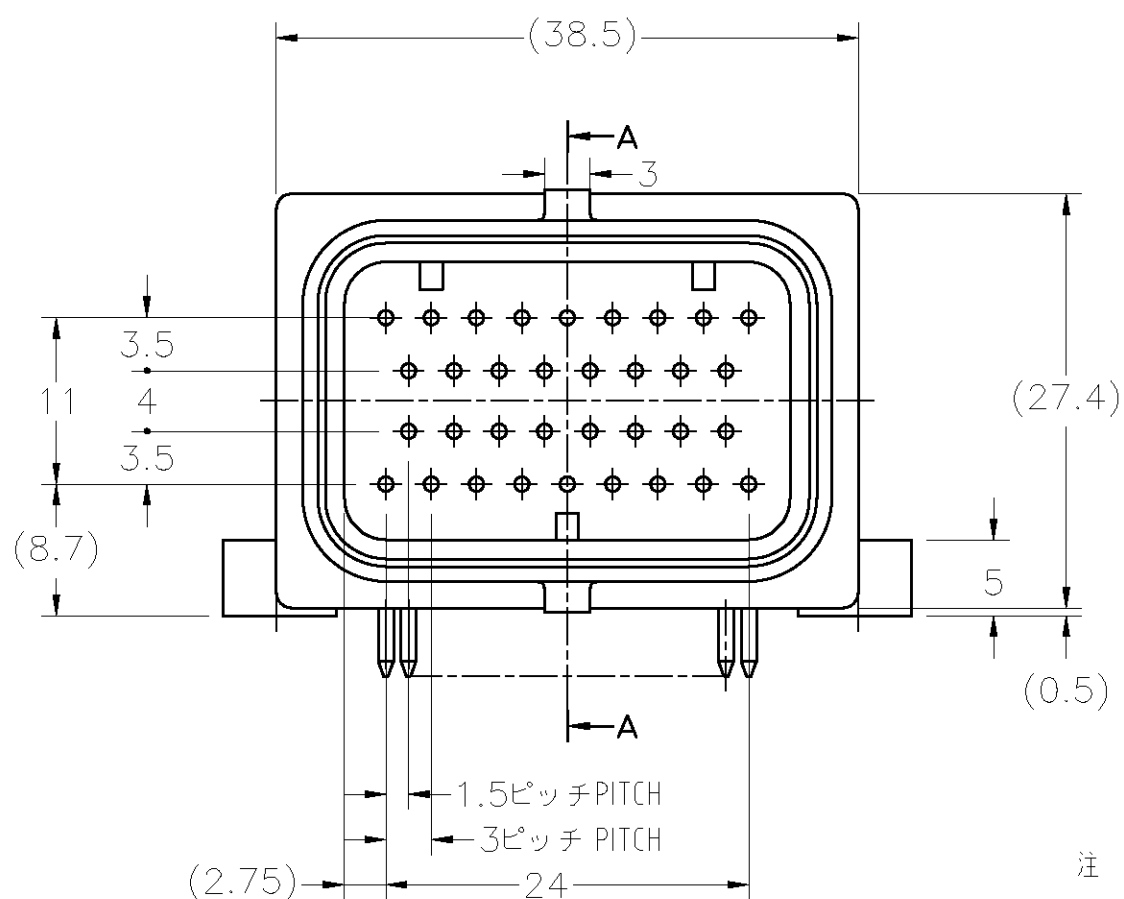
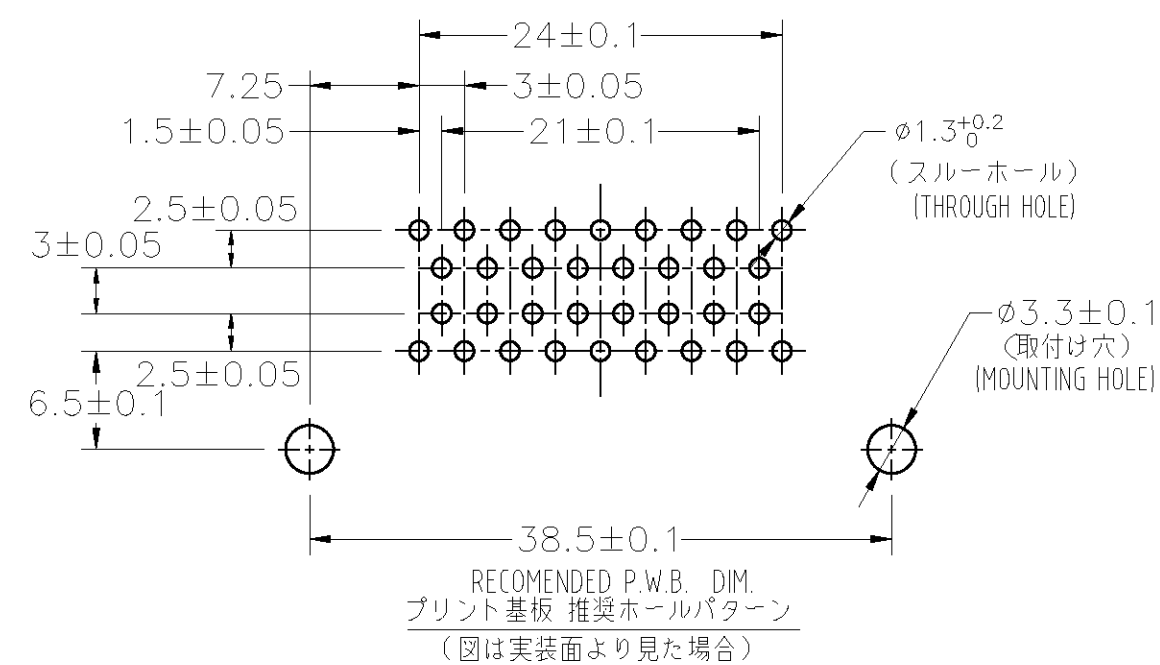
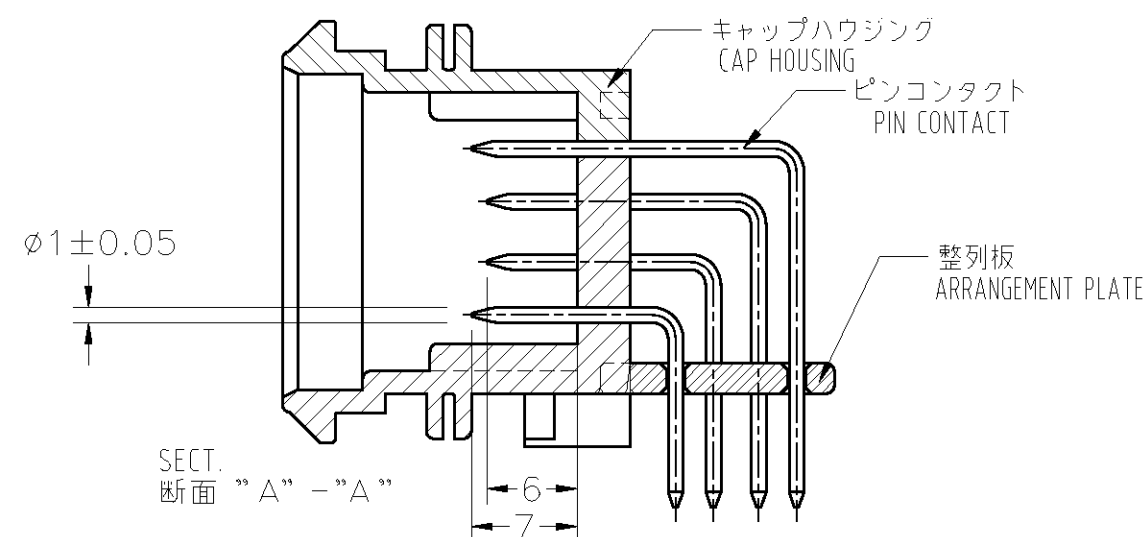


LOC	DIST	REVISIONS 變更					
J	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

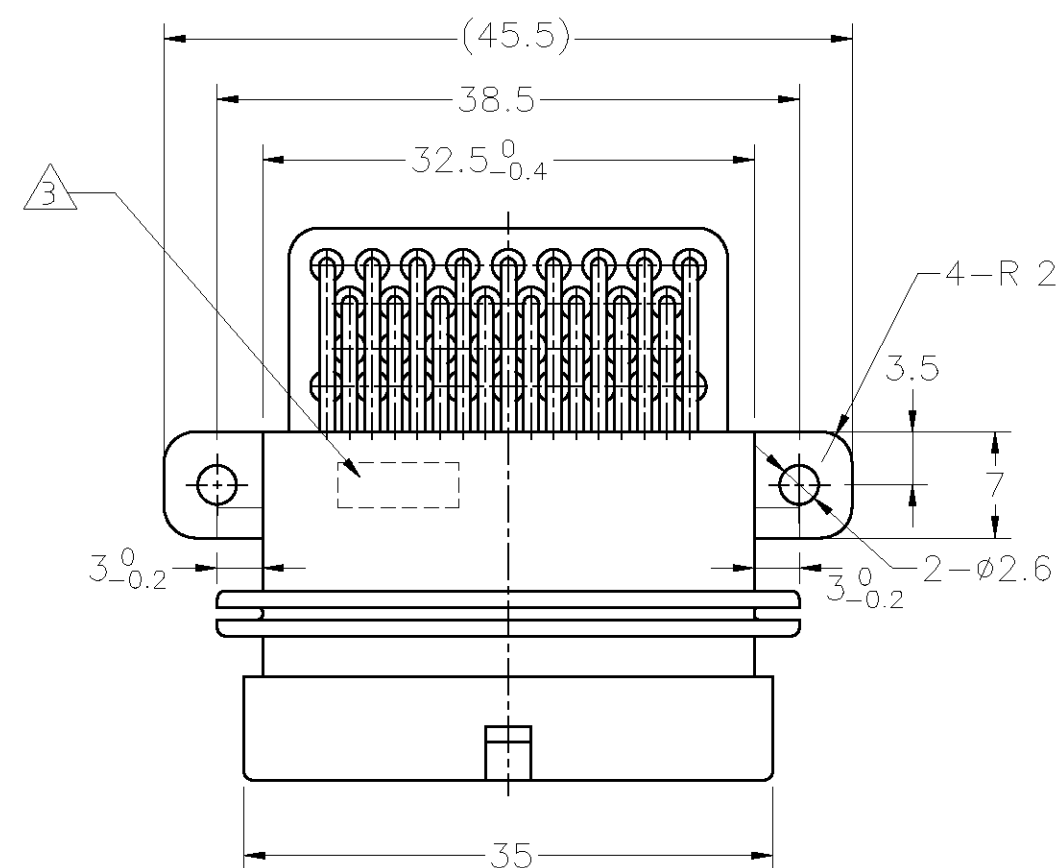

NOTE. 1 .GENERAL TOLERANCE: ± 0.3

2 MATERIAL

CAP HOUSING : POLYESTER
ARRANGEMENT PLATE : POLYESTER
PIN CONTACT : BRASS GOLD PLATING OVER Ni PLATING (CONTACT PART)
BRASS TIN-LEAD PLATING OVER Ni PLATING (SOLDERING PART)

MANUFACTURED DATE CONTROL NO.(LOT NO.)
AS FOLLOWING IS INDICATED.

4. MOUNTING SCREW

JIS B 1122 CROSS RECESSED PAN HEAD TAPPING SCREW
TYPE 2 3xL (L=6.5xBOARD THICKNESS) (ZINC PLATING)

A MATERIAL

CAP HOUSING : POLYESTER
ARRANGEMENT PLATE : POLYESTER
PIN CONTACT : BRASS GOLD PLATING OVER Ni PLATING (CONTACT PART)
BRASS TIN PLATING OVER Ni PLATING (SOLDERING PART)

6. PART NUMBER OF PLUG ASSEMBLY TO BE MATED: SEE TABLE-1

注 1。一般公差: ± 0.3

2

△材質 キャップハウジング：熱可塑性ポリエステル樹脂
整列板：熱可塑性ポリエステル樹脂
ピンコンタクト：黄銅／ニッケル下地、金めっき（接点部）
はんだめっき（基板側）

3.

③ 当箇所には製造日管理番号（ロット番号）を印字する。

4. 基板取付け推奨ねじ

JIS B 1122 十字穴付きタッピンねじ なべ2種 3×L (L=6.5+基板厚)
先端溝付き及び溝無し (亜鉛メッキ)
上記以外のねじを使用の場合、別途打ち合わせの事。

5

△材質 キャップハウジング：熱可塑性ポリエステル樹脂
整列板：熱可塑性ポリエステル樹脂
ピンコンタクト：黄銅／ニッケル下地、金めっき（接点部）
すずめっき（基板側）

6. 嵌合相手型番：TABLE-1 参照

3-6437285-1	3-1437290-9
3-1437285-1	
3-6437285-0	2-1437285-3
3-1437285-0	
PART NUMBER	MATING PLUG ASSEMBLY

TABLE-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN —	 Tyco Electronics Corporation Kawasaki, Japan	
		CHK —		
DIMENSIONS: 単位: 寸 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	APVD —	NAME 名称 SUPER SEAL CONNECTOR CAP HOUSING ASS'Y 34P (DOUBLE LOCK)	
		PRODUCT SPEC 製品規格		
	0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — 5 PLC ± — 6 PLC ± —	APPLICATION SPEC 取付適用規格	SIZE A2	
		WEIGHT —		
MATERIAL 材料 SEE TABLE	FINISH 仕上 —	DRAWING NO 番号 C-2-1437285-8		RESTRICTED TO —
CUSTOMER DRAWING			SCALE 尺度 2:1	SHEET 2 OF 3