
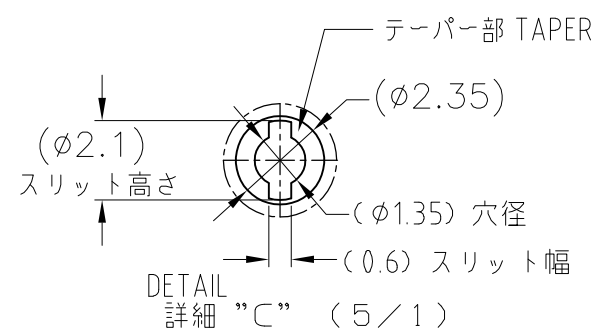
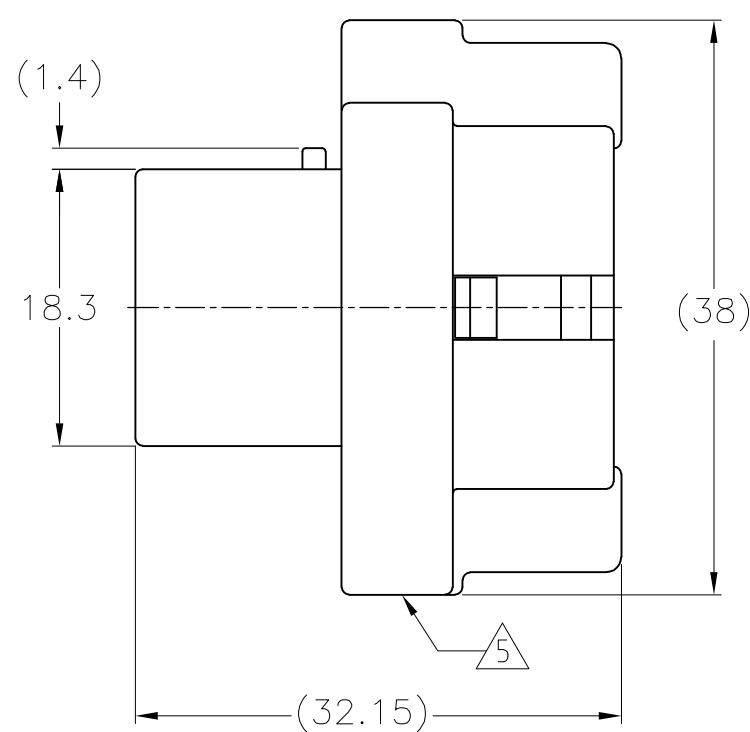
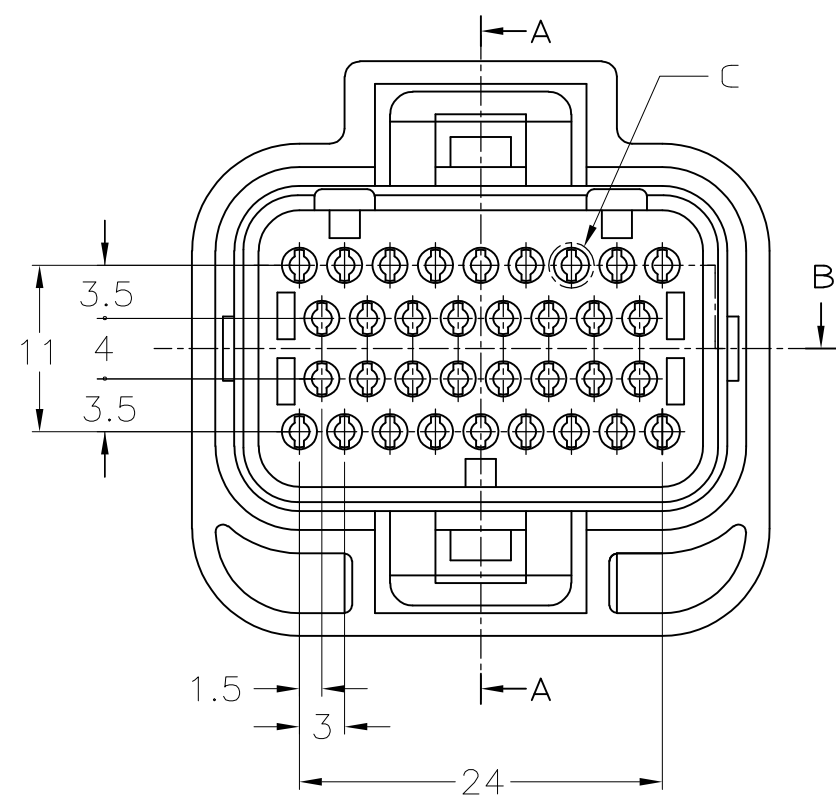


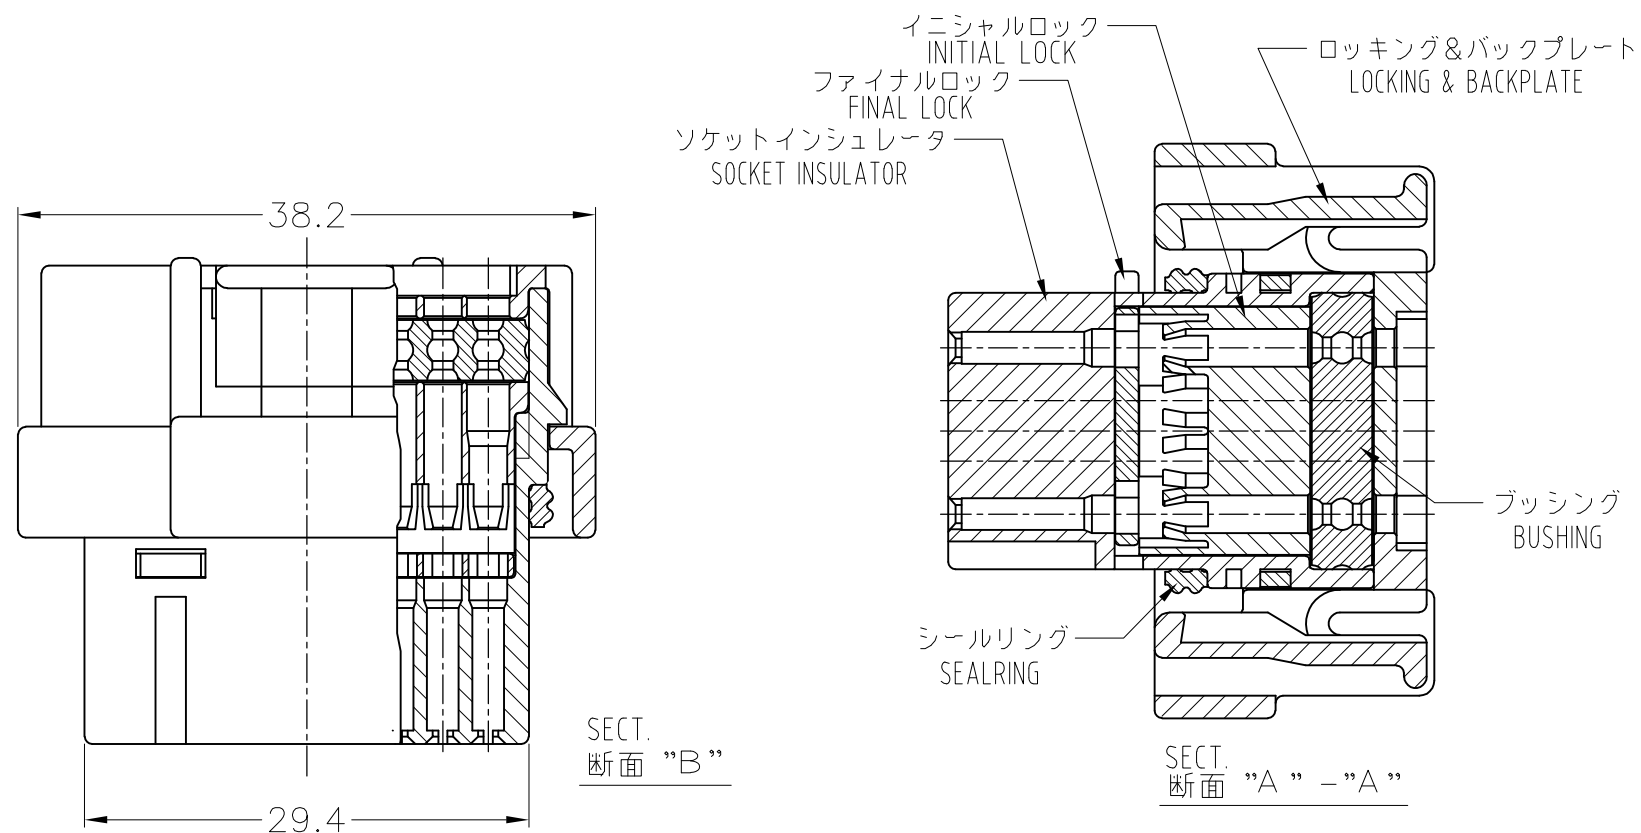


1. 一般公差: ± 0.3

△材質	ソケットインシュレータ：熱可塑性ポリエステル樹脂	
	ファイナルロック：熱可塑性ポリエステル樹脂	色調 白
	イニシャルロック：熱可塑性ポリエステル樹脂	色調 黒
	ロッキング&バックプレート：熱可塑性ポリエステル樹脂	色調 黒
	ブッシング：シリコンゴム	色調 赤茶
	シリリング：シリコンゴム	色調 赤茶

3. 適用電線サイズ APPLICABLE WIRE SIZE

INSULATION DIA 被覆径	WIRE EXAMPLE 適用例	INSERTABLE POSITION 装着可能ポジション
φ2.0~φ2.2	AVSS 1.25	1,9,10,17,18,25,26,34
φ1.6~φ1.9	AVSS 0.5~0.85	ALL POSITION 上記を含む全ポジション

△4 下記に極性種類を示す。

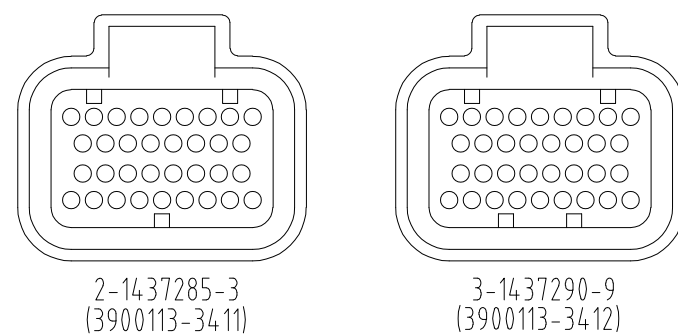

△5 当底面部に製造日管理番号（ロット番号）を印字する。

6 嵌合相手型番：TABLE-1 参照

NOTES 1. GENERAL TOLERANCE: ± 0.3

2. MATERIAL
 SOCKET INSULATOR = THERMOPLASTIC POLYESTER, COLOR:BLACK
 FINAL LOCK = THERMOPLASTIC POLYESTER, COLOR:WHITE
 INITIAL LOCK = THERMOPLASTIC POLYESTER, COLOR:BLACK
 LOCKING & BACKPLATE = THERMOPLASTIC POLYESTER, COLOR:BLACK
 = SILICON RUBBER, COLORED BROWN
 SEALRING = SILICON RUBBER, COLOR:RED BROWN

3. APPLICABLE WIRE SIZE


4. TYPE OF POLARITY IS INDICATED AS FOLLOWS.

5. PRINTING MANUFACTURED DATE CONTROL No. (LOT No.)

6. PART NUMBER OF CAP ASSEMBLY TO BE MATED: SEE TABLE-1

3-1437290-9	3-1437285-1 (34Pos.)
	3-6437285-1 (34Pos.)
2-1437285-3	3-1437285-2 (60Pos.)
	3-1437285-0 (34Pos.)
	3-6437285-2 (60Pos.)
	3-6437285-0 (34Pos.)
PART NUMBER	MATING CAP ASSEMBLY

TABLE-1

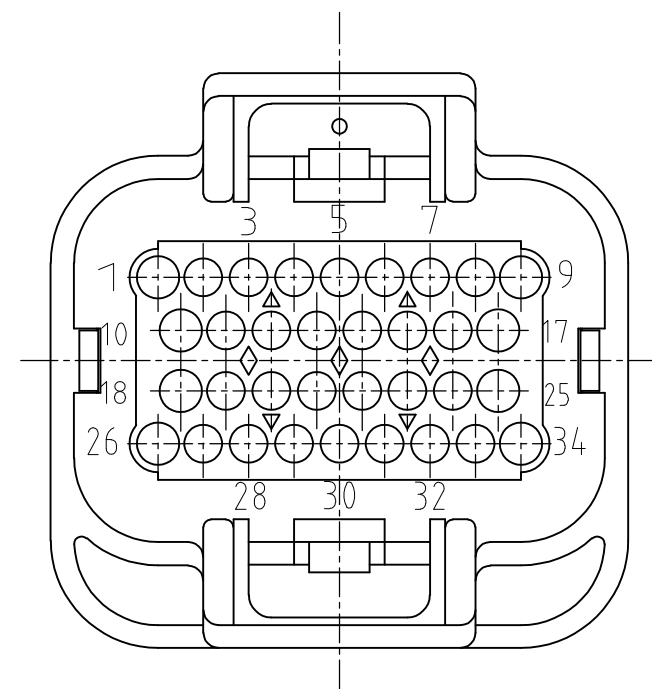

3-1437290-9	3900113-3412	
2-1437285-3	3900113-3411	本 
Part No. 型番	Old Part No. 旧型番	REMARK 備考

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A.YAMAGUCHI 17JAN01		 TE Connectivity			
DIMENSIONS: 単位: 耗 mm		CHK K.BETSUI 17JAN01					
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD K.BETSUI 17JAN01				NAME 名称	
		PRODUCT SPEC 製品規格 108-78140 APPLICATION SPEC 取付適用規格 114-78011, 114-78013				SUPER SEAL CONNECTOR PLUG HOUSING 34Pos. ASS'Y (DOUBLE)	
MATERIAL 材料 ②		FINISH 仕上 -		SIZE A2	CAGE CODE 00779	DRAWING NO 番号 C-2-1437285-3	RESTRICTED TO -
CUSTOMER DRAWING				SCALE 尺度 2:1	SHEET 1 of 4	REV P	