

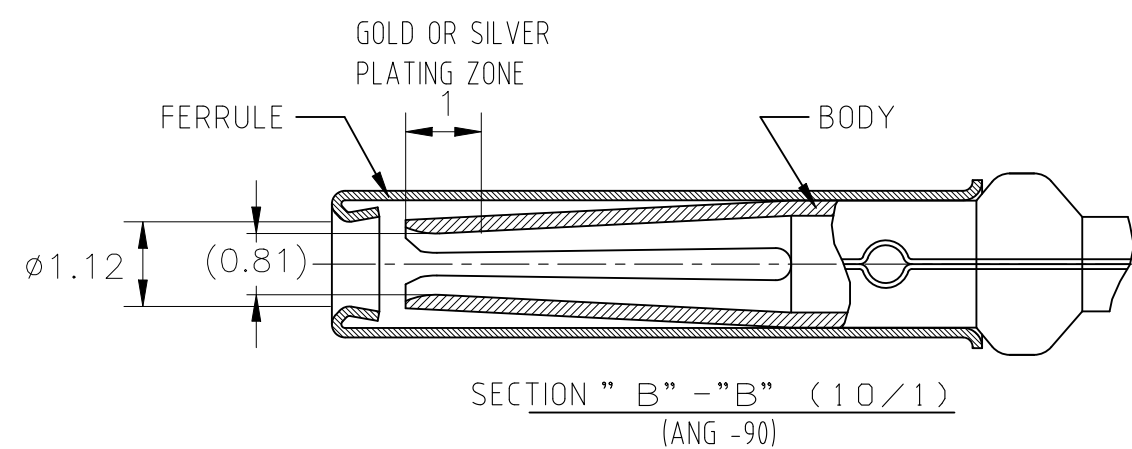


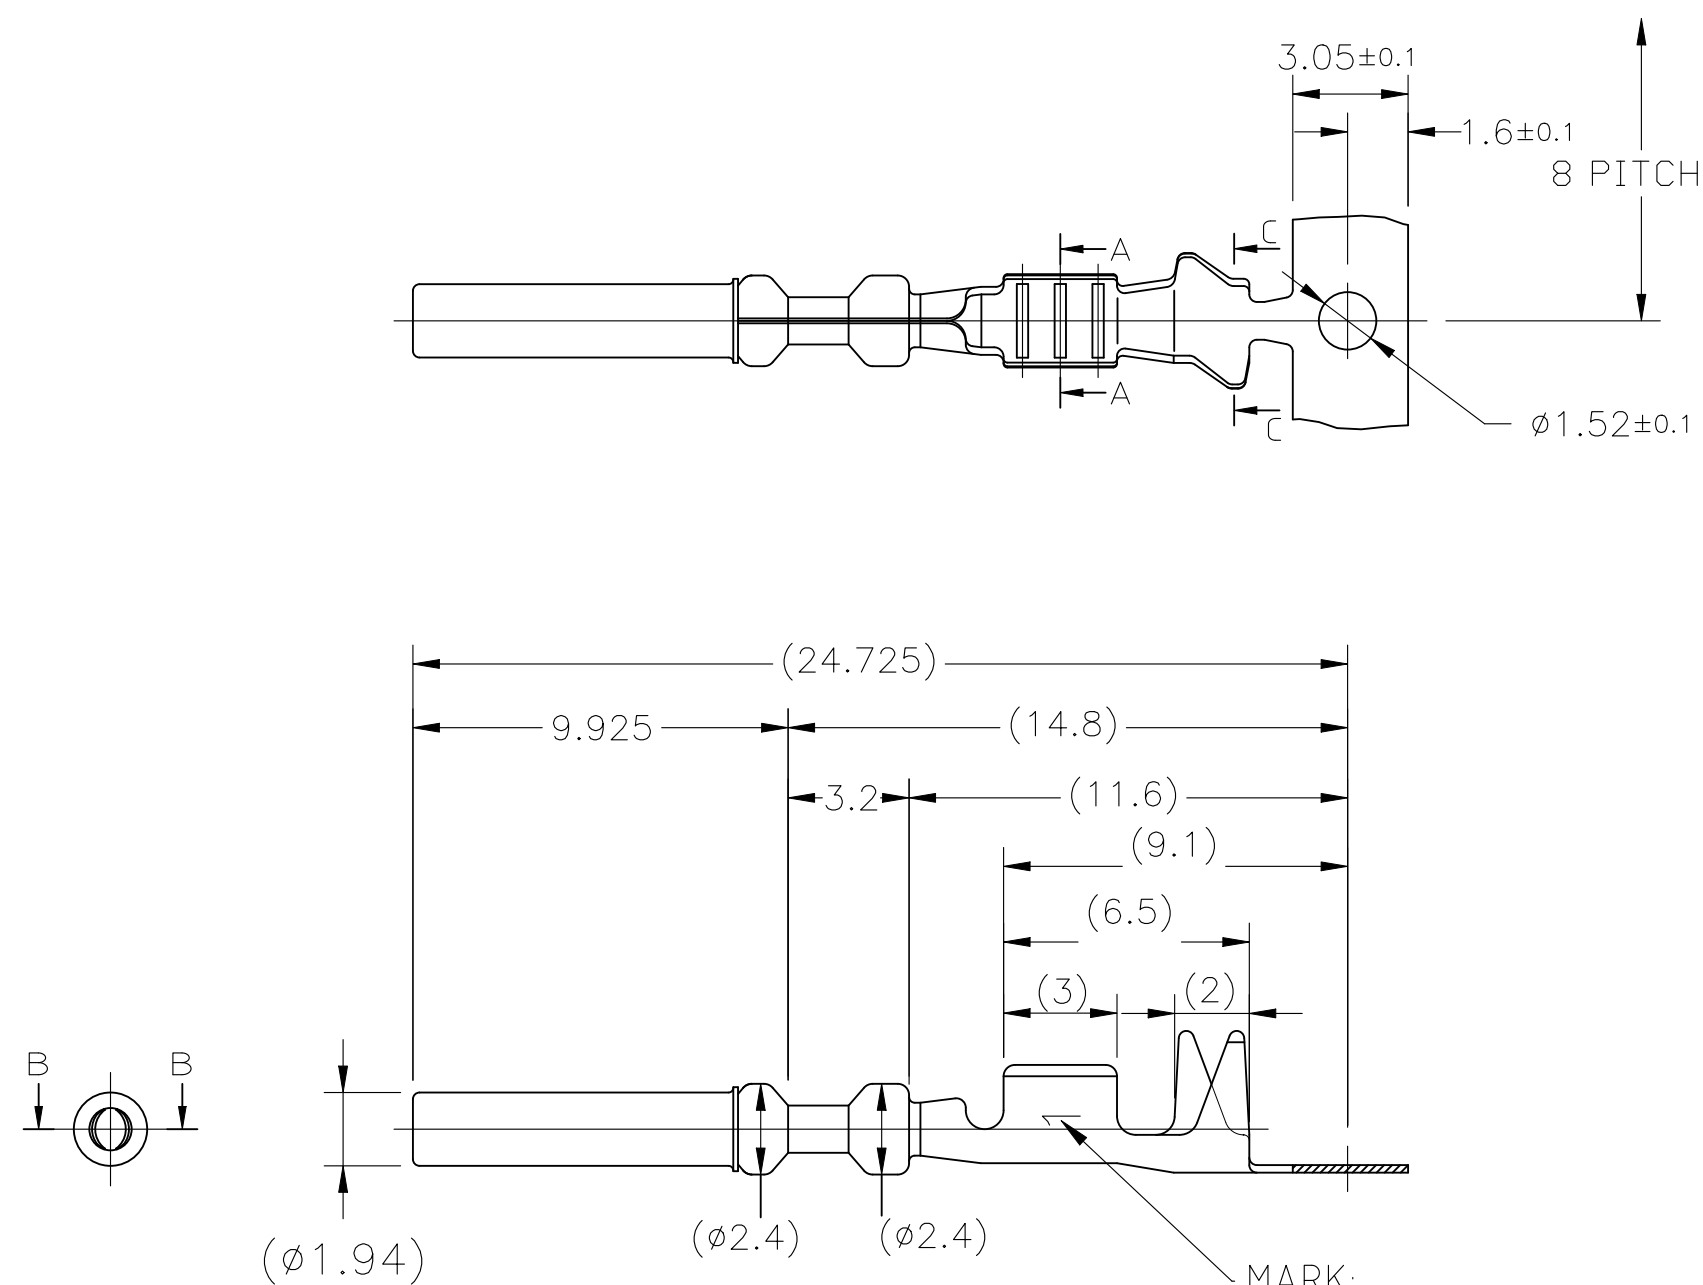

MARK:
1 FOR $X-X-1$,
2 FOR $X-X-2$, $1-X-4$

NOTE. 1. GENERAL TOLERANCE ± 0.2
2. NO BURRS WHICH AFFECT PERFORMANCE.
3. MATERIAL BODY :
FOR 2461132-X, COPPER ALLOY / SELECTIVE SILVER PLATING
FOR 1-2461132-X, COPPER ALLOY / TIN PLATING OVERALL
FERRULE : STAINLESS STEEL
4. 7000 PIECES PER REEL.

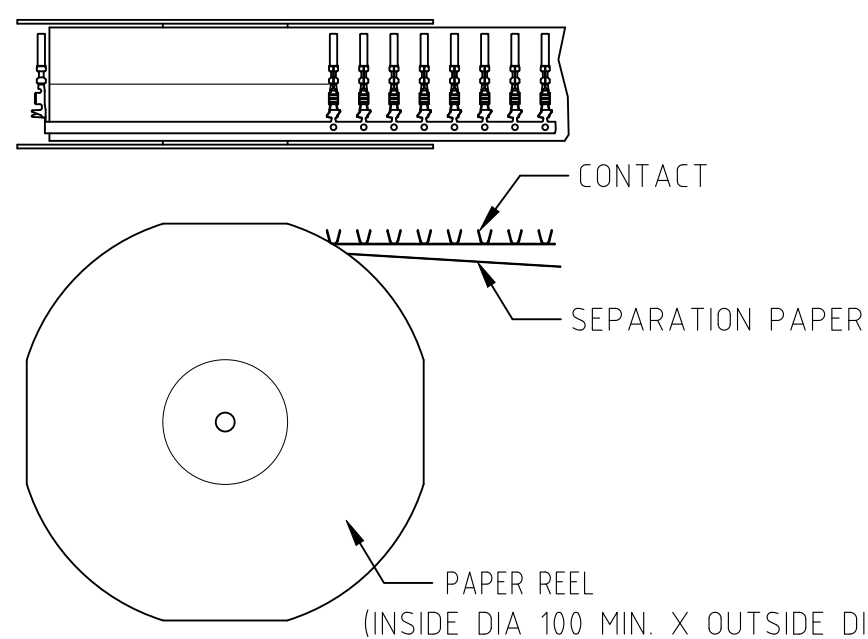

TCPN (PLATING)	DIMENSION	WIRE RANGE / mm ²	INSULATION RANGE / mm
2461132-1 (SILVER) 1-2461132-1 (TIN)	 	0.75-1.25	ø1.6-2.2
2461132-2 (SILVER) 1-2461132-4 (TIN)	 	0.5	ø1.6-1.9
1-2461132-2 (TIN)	 	0.5	ø1.4-1.7

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.GAO 12OCT2023		 TE Connectivity							
		CHK C.WAN 13OCT2023									
DIMENSIONS: 単位: 耗 mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		NAME 名称		SUPER SEAL CONNECTOR RECEPTACLE CONTACT ASSEMBLY —					
		APVD Z.ZHOU 13OCT2023									
MATERIAL 材料 NOTE 3		PRODUCT SPEC 製品規格 108-160687		SIZE A2		CAGE CODE 00779		DRAWING NO 番号 C-2461132		RESTRICTED TO —	
		APPLICATION SPEC 取付適用規格 114-78011									
		WEIGHT 0.25 g									
		CUSTOMER DRAWING		SCALE 原度 5:1		SHEET 1 of 1		REV A1			